


BEAM ANCHORS

Technical Data Sheet

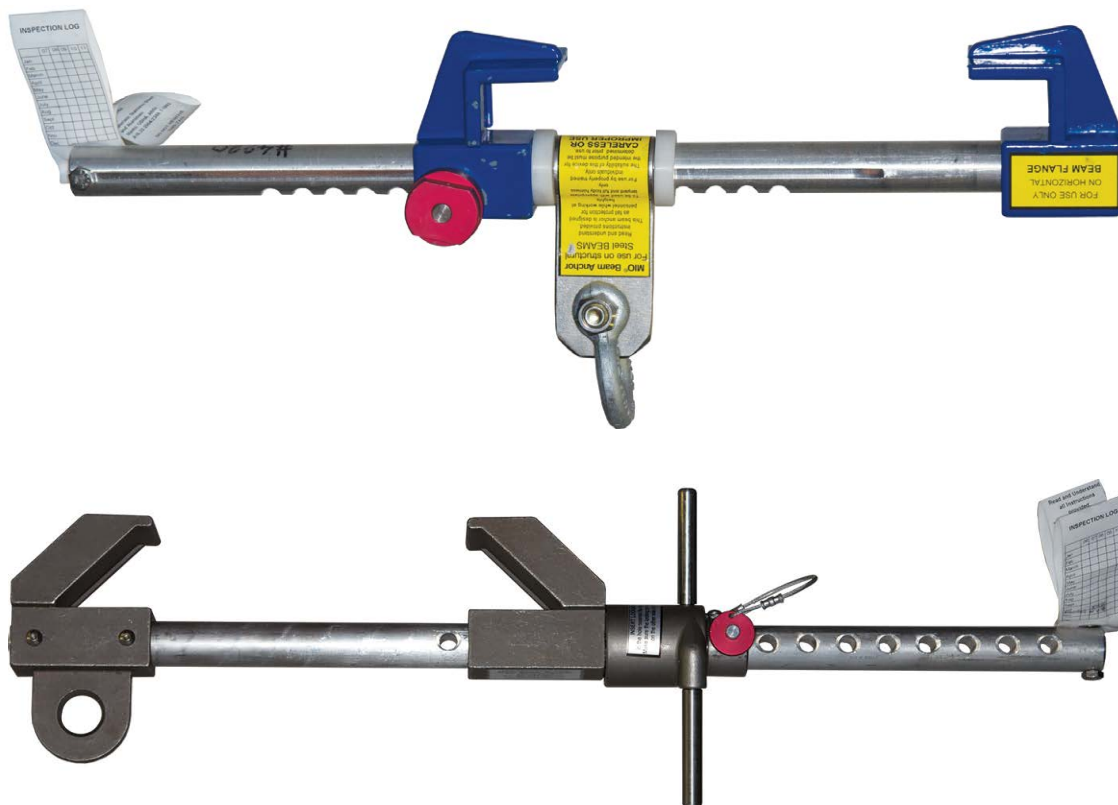

SpanSet Australia Ltd

150 Old Bathurst Road
Emu Plains
NSW 2750
Australia

Telephone

+61 2 4735 3955

Fax

+61 2 4735 3630

Email

sales@spanset.com.au

Internet

www.spanset.com.au

BA 004 Beam Anchor

This I-Beam Clamp is one of the lightest and nimblest of its kind. Beyond its unmatched weight, the clamp incorporates a variety of unique components – all resulting in superior performance.

Aluminum flange hooks with bronze inserts make the clamp extremely sturdy, and drastically reduce friction from sliding along the I-Beam. A solid steel design and 7-series aluminum support rod give the beam anchor optimum strength.

An alloy steel 360° swivel D-ring allows for ultimate freedom when connected to a lanyard or attachment. Lightweight design doesn't mean lightweight handling.

Technical Information


Type	Horizontal
Maximum Flange Width	350mm
Minimum Flange Width	100mm
Maximum Flange Thickness	28mm
Adjustment Type	Twist Lock
MBS	22kN

Material Specifications

Support Bar	Aluminium Alloy
Flange Hook	Alluminium Alloy
Flange Insert	Aluminium Bronze
Pawl	Zinc Plated Alloy Steel
Swivel D-Ring	Zinc Plated Alloy Steel
Flange Stops	Stainless Steel
D-Ring Mount	Stainless Steel
Mount Screw	Steel



BA 004

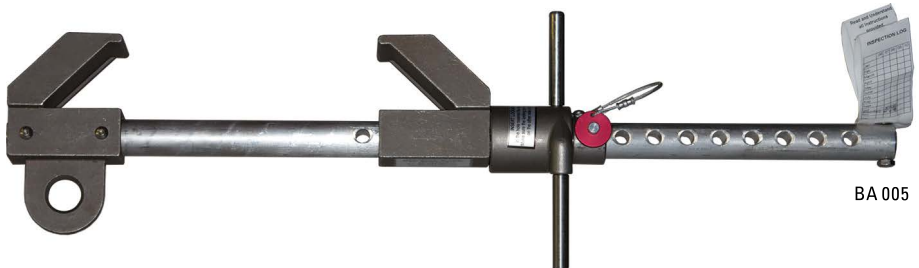

BA 005

BA 005 Beam Anchor

MIO Quick Fix Beam Anchor (patent pending) is designed to create a temporary fixed anchorage for personal fall protection systems on vertical I and H beams. This unit installs in seconds without tools. Quick installation is achieved via incorporated unique sliding/tightening mechanism. Anchor fits I-beam flanges from 10 to 35.5cm wide and up to 3.1cm thick.

- Installs easily
- Adjustable in seconds
- Provides vertical anchorage
- Provides an anchor point for personal fall protection and horizontal lifeline systems
- Available in either high grade aluminum or stainless steel
- Rated at 2,268kg
- Meets OSHA and ANSI requirements.

Technical Information

Type	Vertical
Maximum Flange Width	350mm
Minimum Flange Width	100mm
Maximum Flange Thickness	31mm
Adjustment Type	Pin/Screw
Rating	22kN

Training Courses

Height Safety

Working Safely at Height

Working Safely at Heights
Refresher

Height Safety Supervisor*

Height Safety Manager*

Rescue

Rescue Systems Operator*

Vertical Rescue*

Tower and Pole Rescue*

Wind Access Rescue Technician*

EWP Emergency Escape

Gotcha Rescue

Confined Space

Confined Space*

Confined Space - Refresher*

Breathing Apparatus*

Confined Space Non-Entry Rescue*

Inspection

Competent Person Practical
Inspection and Record Keeping*



SpanSet Accreditations

ISO 9001:2015 Certified Quality
Management System

ISO 14001:2015 Certified Environment
Management System

OHSAS 18001:2007 Certified
Occupational Health and Safety
Management Systems

Australian/New Zealand Standard
4801:2001 certified Occupational Health
and Safety Management Systems

Accredited for compliance with ISO/IEC
17025 - Testing

ASQA Registered Training Organisation
certified to ISO 9001:2008

Certified manufacturer to AS/NZS 1891.1
"Industrial Fall Arrest Systems and Devices"

Certified manufacturer to AS/NZS 1353.1
"Flat Synthetic Webbing Slings"

Certified manufacturer to AS/NZS 4497
"Round Slings—Synthetic Fibre"

www.spanset.com.au

