

SpanSet Australia Ltd

150 Old Bathurst Road
Emu Plains
NSW 2750
Australia

Telephone

+61 2 4735 3955

Fax

+61 2 4735 3630

Email

sales@spanset.com.au

Internet

www.spanset.com.au

C Series Heavy DutyWeb Slings

SpanSet 4 ply flat slings are manufactured with reinforced eyes for greater durability

- Wide load bearing surface to minimize damage to fragile loads
- Lightweight for enhanced manual handling safety
- Excellent strength to weight ratio
- Light and flexible for good access in awkward situations
- Certified to AS1353
- Accredited
- More lifting power due to four layers
- Heavy-duty flat sling 12 tonne up to 20 tonne
- No damage during lifting due to wide supporting surface
- Optional with loop or D-ring
- Optimum handling due to low weight
- Exceptional lateral strength.

CS Series Ordering Codes

Colour / Code	Rated WLL (kg)	3 metre	4 metre	5 metre	6 metre	8 metre	10 metre	15 metre
CS12000	12,000	CS12000-0x3.0	CS12000-0x4.0	CS12000-0x5.0	CS12000-0x6.0	CS12000-0x8.0	CS12000-0x10.0	CS12000-0x15.0
CS16000	16,000	CS16000-0x3.0	CS16000-0x4.0	CS16000-0x5.0	CS16000-0x6.0	CS16000-0x8.0	CS16000-0x10.0	CS16000-0x15.0
CS20000	20,000		CS20000-0x4.0	CS20000-0x5.0	CS20000-0x6.0	CS20000-0x8.0	CS20000-0x10.0	CS20000-0x15.0


Other sizes available on request

secutex® Cut Resistant Sleeves for CS Slings

Colour / Code	Secutex Code	Interior Width (mm)	Exterior Width (mm)	Exterior Height (mm)	Weight Per Run (kg/Metre)	Secutex Code	Interior Width (mm)	Exterior Width (mm)	Exterior Height (mm)	Weight Per Run (kg/Metre)	Secutex Code	Interior Width (mm)	Exterior Width (mm)	Exterior Height (mm)	Weight Per Run (kg/Metre)
	Single Sided					Double Sided					Clip-On				
CS12000	SF1-CS-180	180	230	37	3.0	SF2-CS-180	180	230	37	4.2	SC-CS-180	180	230	37	4.1
CS16000	SF1-CS-240	240	265	35	3.1	SF2-CS-240	240	265	35	5.6	SC-CS-240	240	265	35	5.0
CS20000	SF1-CS-300	300	330	35	3.8	SF2-CS-300	300	330	35	6.6	SC-CS-300	300	330	35	6.4

CS Series 4 Ply Flat Webbing Slings Technical Data

Colour / Code	Rated WLL (kg)	1 Width (mm)	2 Thickness (mm)	3 Min Sling Length (mm)	4 Min Eye Length (mm)	Min Pin Diameter (mm)	Min Load Edge Diameter (mm)
CS12000	12,000	180	16	2500	800	16	48
CS16000	16,000	240	18	3000	1000	18	54
CS20000	20,000	300	18	3100	1200	18	54

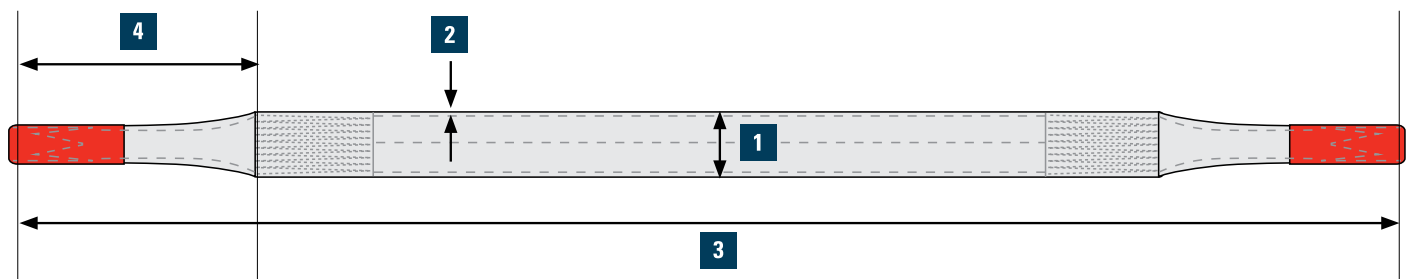

Training Courses

Height Safety

Working Safely at Height
Working Safely at Heights Refresher
Height Safety Supervisor*
Height Safety Manager*

Rescue

Rescue Systems Operator*
Vertical Rescue*
Tower and Pole Rescue*
Wind Access Rescue Technician*
EWP Emergency Escape
Gotcha Rescue

Confined Space

Confined Space*
Confined Space - Refresher*
Breathing Apparatus*
Confined Space Non-Entry Rescue*

Inspection

Competent Person Practical
Inspection and Record Keeping*



SpanSet Accreditations

ISO 9001:2015 Certified Quality
Management System

ISO 14001:2015 Certified Environment
Management System

OHSAS 18001:2007 Certified Occupational
Health and Safety Management Systems

Australian/New Zealand Standard
4801:2001 certified Occupational Health
and Safety Management Systems

Accredited for compliance with ISO/IEC
17025 - Testing

ASQA Registered Training Organisation
certified to ISO 9001:2008

Certified manufacturer to AS/NZS 1891.1
"Industrial Fall Arrest Systems and Devices"

Certified manufacturer to AS/NZS 1353.1
"Flat Synthetic Webbing Slings"

Certified manufacturer to AS/NZS 4497
"Round Slings—Synthetic Fibre"

www.spanset.com.au

