

SpanSet GmbH & Co. KG
Jülicher Straße 49–51
52531 Übach-Palenberg
Tel. +49 (0) 2451 4831-0
Fax +49 (0) 2451 4831-207
Email info@spanset.de
Web www.spanset.de



www.spanset.de

Subject to technical alterations. All rights reserved. No part of this catalogue may be reproduced or processed, duplicated or distributed using electronic systems in any form (print, photocopy, microfilm or any other procedure) without the written approval of SpanSet GmbH & Co. KG. This catalogue has been prepared with all due care; SpanSet GmbH & Co. KG accepts no liability for errors or omissions.

01

Height Safety
Lifting
Load Control
Safety Management

SpanSet®

**SpanSet
GROUP**

**50
YEARS**

**SpanSet
Certified
Safety**

SpanSet Germany

For more than 45 years, people have been trusting us with their lives.

It was not so long ago that the lives of thousands of people literally hung by a thread day after day – until Volvo begin to install safety belts in its cars. This innovation manufactured from a hard-wearing fabric ribbon, which marked the birth of the company SpanSet, has revolutionised safety technology. According to the motto „lighter, stronger, more flexible“, the range of products was quickly expanded and the quality continuously improved.

We have pursued this principle with consistency and passion, which has made us the innovation leader - in some fields even the market leader - in many areas of industry. When developing new products we always stay focused on the demands of our customers and users, whom we work closely with at all times. The best example of this is Safeline, a fixed-line roof fall arrest system made from rustproof steel that is used as a horizontal fall arrest system and is manufactured in line with customers' requirements for the specific application. We even find highly specialised solutions for very complex applications, such as special products for use in the wind power industry.

In doing so, we benefit greatly from our international orientation. Especially within the borders of the European Union our customers benefit from the close cooperation of the SpanSet group. With a close eye on the canon of the EN standards, we know what users in Europe need and what demands the legislation of the various countries places on those using personal protective equipment.

On the following pages you will find our products and solutions for fall arrest. You will be familiar with many of the products, while some products are new to our portfolio, and others have been optimised, such as the electronic product identification and maintenance system IDXpert®, which simplifies the mandatory inspections of your (not only personal protective) equipment for you.

Should you miss a product in our very comprehensive portfolio or if you are in search of a very special solution, simply contact us directly or contact one of our company representatives.


Patrick Schulte
Managing Director


Hans-Josef Neunfinger
Managing Director



Fast access

The company SpanSet	4-5
A strong partner in height safety matters	6-7
Height safety measures	8-16
Harnesses	17-21
Harnesses jackets	17-21
Lanyards	22-24
Karabiner	25
Rope restraint lanyards	26-27
Anchor devices and points	28-33
Horizontal safety systems	34-38
Fall arrest accessories	39
Rescue systems	40-41
Rescue systems accessories	42-43
PPE sets	44
Other product services	45-47
More from SpanSet	48

Certainly you can find all the information at the internet:

www.spanset.de




Simply capture the code with the QR reader using your mobile phone.

www.spanset.de

- Work restraint systems
- Work positioning
- Fall arrest
- Rooftop work
- Lifting platform
- Safety system on vehicles
- Building maintenance
- All sectors of industry
- Container units
- Building construction
- Telecommunication
- Work on masts
- Canal/ manhole works
- Elevator installation and service
- Military
- High-bay warehouses
- Scaffolding
- Wind energy
- Tower crane installation & maintenance
- Construction
- Steel construction
- Capcha
- Oil & gas
- Height rescue
- Crane
- Horizontal safety systems
- Horizontal overhead
- Vertical safety systems

SpanSet around the world

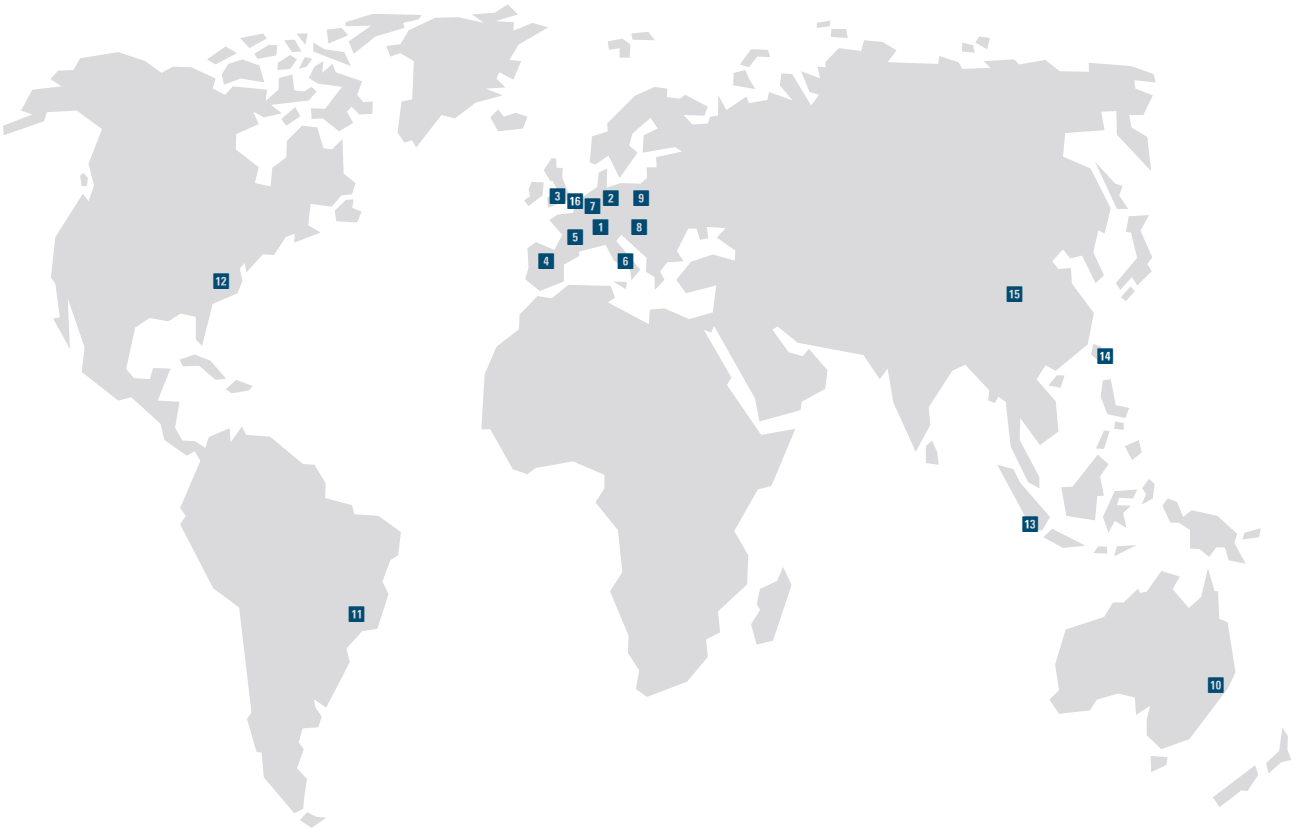

- 1 Switzerland

2 Germany

2 England

4 Spain

5 France

6 Italy
- 7 Austria

8 Hungary

9 Poland

10 Australia

11 Brazil

12 USA
- 13 Indonesia

14 Taiwan

15 China

16 Netherlands



Table of Contents

The company SpanSet	4-5	Twistlock karabiner	25	MT-3 glove	39
A strong partner in height safety matters	6-7	Screw karabiner DZ09	25	Extension strap	39
				Helmet	39
Height safety measures	8-16	Rope restraint lanyards	26-27	Bags/duffel bags	39
Safety solutions according to your needs	8	RARL 329 rope restraint lanyard	26	Seat board	39
Guaranteed quality	8	Horizontal work position line „Clima WPL“	26		
Assessing and planning work at height	9	Fall arrest system „Clima VL“	27	Rescue systems	40-41
Laws, provisions and directives	10-11	Rope restraint lanyard „WPLANY 2M“	27	When a rescue situation arises!	40
Take the right measures	12-13			D2 Evacuation and descender device	40
Calculating the fall height	14-15	Anchor devices and points	28-33	GOTCHA™ Basic Kit	41
Education and training Height Safety	16	HD Tripod	28	GOTCHA Shark™ Kit	41
		Winch for HD Tripod	28	GOTCHA™ CRD Kit	41
Harnesses	17-20	Bracket for SVLRB	28		
Why use harnesses from SpanSet?	17	Bracket for winch	28	Rescue systems accessories	42-43
1X-harness	18	Single anchor point „SafePoint“	29	Suspension loop trauma harnesses	42
2X-harness	18	Single anchor point „Starpoint“	29	Suspension relief straps	42
2X-harness „EXCEL“	18	Free-standing anchor point „TETRAGON“	29	Casualty harness	42
2X rescue harness	19	Roof hooks for pitched roofs	30	Rescue cracker	42
2-point harness „Atlas“	19	Proof Loader Kit	30	Rope clamp	42
Harness „Clima“	19	SpanAnchor	30	Footloop	42
„MWEF-Pro“/„MWEF-Pro 2“ harness	20	Anchoring beam	30	„Buddy“ fall arrester	42
„ScaffPro“ harness	20	Beam hoist	31	GRABBA Bag	43
		Beam clamp Corso	31	Safe Lifting Kit	43
Harnesses jackets	21	Beam clamp	31	Spanhoist 12.5	43
1X-harness jacket (EN 361) „Driver“	21	BMS anchoring sling	31		
2X-harness jacket (EN 361)	21	Xtracta	32	PPE sets	44
		Xtracta SPXT2	32	Lifting platform set	44
Lanyards	22-24	Xtracta SPXT5	32	Roofwork set	44
Why use lanyards from SpanSet?	22	Xtracta SPXT24	32	Scaffold set	44
Fixed-length lanyard	23	Accessories for the SpanSet Xtracta series	33	Special set	44
Elasticated lanyard	23			Vertical set	44
Adjustable lanyard	23	Horizontal safety systems	34-38	„SafetySet E“ PPE set	44
ATLAS lanyard	23	Horizontal safety line „ERGO LINE“	34	Other product services	45-47
Fixed-length Y-lanyard	24	Tempoline	35	Inspection service	45
Elasticated Y-lanyard	24	Safeline	36	Prints/patches	45
ATLAS-Y-lanyards	24	HT8	37	IDXpert®	46-47
DSL-lanyards	24	Saverline	38		
		Saverline with rescue lifting device	38	More from SpanSet	48
Karabiner	25	Fall arrest accessories	39		
Screw karabiner ML 2	25	Parking Point fixing point	39		
Twistlock scaffold hook	25	Tool lanyard	39		
Trilock karabiner	25				
Screw karabiner NZ09	25				



How the seat belt became the standard for safety. The history of SpanSet.



50 years ago the world was very different, but not necessarily better. For example, cars had no seat belts yet. But the hour had come for a small Swedish belt weaving company.

Today it is hard to imagine that a few decades ago, most cars were not equipped with seat belts. In other respects, too, little attention was paid to accident prevention at that time, and so many collisions from which today one would emerge unscathed had fatal consequences.

In order to counter this, the Swedish car company Volvo approached the belt weaving companies AB Textilkonst and Klippan at the end of the 1950s with instructions to develop a safety belt for its vehicles.


Volvo was already building very sturdy cars that withstood the harsh Swedish winters and other tests, but the manufacturer wanted to continue to improve the safety of the occupants. Together with Volvo engineers, Klippan developed the first car safety belt in the world, made of high-strength fabric ribbon. It was installed in the

Amazon and 544 models for the first time in 1959 and caused a lot of astonishment in the public, but also ensured an enduring image of Swedish inventions as both pioneering and durable.

How we replaced ropes and chains

The car safety belt was a great success, and soon other manufacturers began to install it. Thanks to the great demand, Erik Ehnimb, co-owner of Klippan, was able to found the SpanSet company in Malmö in 1966. The straps produced by SpanSet were quickly and enthusiastically put to use in many other areas in which chains and wire ropes had previously been used, for example for the transport of paper rolls. The customers appreciated the enormous load-bearing capacity of the new lashing and lifting slings.

In 1967, Erik Ehnimb founded SpanSet AG in Hombrechtikon in the Zurich highlands, along with other subsidiaries in Germany, Italy, France and England. Later, companies in Asia, America and Australia were added, thus forming a global distribution network.

A large industrial pipe, possibly for a ship or offshore platform, is being moved by a yellow crane in a large industrial facility. The pipe is dark grey with a red flange and is supported by a black dolly. A worker in a blue uniform and hard hat stands in the foreground, looking at the pipe. The background shows the high ceiling and structural elements of the facility.

**How we ensure that our
name will still be highly
regarded tomorrow.**

How our inventions became the norm ...

The SpanSet products with their load capacity have gained such a good reputation around the world that international safety standards have been developed on the basis of the products.

The development of standards for height safety equipment has been significantly influenced by SpanSet; for instance, in national working groups that determine what constitutes a standard and in which SpanSet is regularly involved.

SpanSet was part of the team that drafted the BS8454:2006 standard for the provision of training and education for working at height, and was the first company to be certified to this standard by the BSI. This is how something becomes the norm: by setting a standard and by doing so repeatedly for more than 40 years.

... and how the norm influenced new inventions

This also means that we are often called upon for advice during the development of new products, especially if these products are eventually to be transported and secured by our systems. We also offer support as a partner for safety training and consultation.

This is how SpanSet went from small belt weaving company to an international forerunner in height safety, load control, lifting and safety management – through exceptional performance and recognition.

One development follows the next

In 1992, the horizontal safety line was developed: the first temporary horizontal anchorage line to employ a webbing and ratchet system for pretension, and to offer predictable cushioning during a fall.

The ABS pressure ratchet, another global novelty, appeared in 1995. This allows a controlled release of the tensioned ratchet, so that goods at risk of falling can also be unloaded safely.

In 1997, SpanSet launched the Power sling series as well as a new generation of round slings with textile fibre reinforcement in the protective sleeve for maximum tear resistance – capable of bearing up to 50 tonnes even in those days.

In 2001, the GOTCHA range was launched – a range of height rescue systems. The first pre-assembled rescue kit offers a descender device and enables the rescue of a suspended worker.

In 2002, SpanSet launched the Tension Force Indicator (TFI) which is integrated in the pull ratchet and indicates the pre-tensioning force. This allowed the use of lashing equipment to become safer and more economical. The TFI is also incorporated in the horizontal safety line.

SpanSet has also been offering height safety training courses since 2002.

SpanSet developed the first collective measures for working at height in close cooperation with clients in the international oil and gas industry. The developments and optimisations became the first product in the field of cooperation projects.

In 2005, the Proof Loader Kit was launched – a complete anchorage and testing system for workers to quickly establish and quantify their own anchor points in concrete or natural materials.

In 2008, SpanSet celebrated yet another premier: the ATLAS harness, the first complete range of products developed specifically to meet the requirements of larger workers.

SpanSet's recipe for success: Always be one step ahead!

We are very proud of our achievements. After all, they have contributed to safer and easier working conditions around the world – and thus to fewer accidents and lower operating costs.

We were especially glad to hear the story of a policeman, who during a truck inspection replaced his professional scepticism with a friendly smile after seeing that the cargo was secured with our lashing straps.

Meeting standards is good. Setting standards is better.

The SpanSet brand stands for something – not only for meeting international safety standards, but also for raising them time and time again. For example, we contributed significantly to the development of the European Standards 1492-1 and 1492-2 for lifting technology and of the guidelines of the VDI 2700 for load control. In the past, in the present and in the future.

This is precisely what we stand for with our products: service and advice for more safety – more than is demanded today and as much as is possible tomorrow.

That is our goal, our job and our passion. So that those who work with SpanSet can continue to place their trust in us in the future – just like the police.

SpanSet – Certified Safety

HEIGHT SAFETY MEASURES

- Safety solutions according to your needs
- Guaranteed quality



The best for safety

Safety solutions according to your needs

SpanSet is committed to the development and manufacture of products that meet our customers' needs in the best possible way. We attribute the success of our products to our good listening skills and our policy of continual research and development. This applies to all applications from fall arrest and work position to technical rope access and the Gotcha height rescue system. By closely communicating with our customers from the procurement stage through to the training and implementation stages, SpanSet is able to ensure that the right products and services are in place to satisfy our customers' demands and needs. SpanSet's aim is to develop on-going partnerships with its customers to support existing products and to provide solutions to new challenges.

All SpanSet products have been developed to work as part of a holistic strategy for safety solutions, which includes installation, training, implementation, testing and servicing. By offering our customers a comprehensive solution, SpanSet is able to meet the customers' needs and help them develop safer solutions for working at height. This is reflected in the development of rescue systems and training courses: these have been developed to provide skilled workers with a practical solution for personal fall arrest, thus meeting all requirements for working at height.

Guaranteed quality

Safety is no coincidence. It is the result of a consistent quality strategy. The key period in which the economy as a whole gradually became aware of this important factor was the 1980s. This decade marked the transition from the previous quality control system to systematic, industrial quality assurance. This is not simply another way of saying the same thing, but represents a quantum leap for the industry. In the previous conventional quality control, the final product was tested in terms of its relevant criteria, such as size accuracy, weight, functions etc. Any products that failed to meet these criteria were rejected, and this was no insignificant quantity. As part of an optimisation and controlling process, the industry asked itself how these large quantities could be prevented – while maintaining the same level of quality. The answer was simple: to ensure a consistent level of quality already during the production process and to thus prevent rejects right from the start.


As easy as this answer is, as difficult its implementation is – after all, the possibilities of influencing the production process are seemingly endless. To do this, the starting points first have to be determined and then weighted. SpanSet already established the „Quality Assurance“ department back in 1989 – an separate and independent department equipped with state-of-the-art technology. This meant that quality assurance was finally and inseparably linked to the corporate philosophy. Already in 1994, this consistent implementation resulted in SpanSet's certification: TÜV Rheinland certified a quality management system in line with DIN ISO 9002/EN 29002. A very welcome confirmation of our efforts, but no reason to have a rest. The SpanSet quality management system is currently DIN EN ISO 9001:2008-certified by TÜV Rheinland. And the process continues. Because quality is a path for which we believe there is only one direction: forward.

HEIGHT SAFETY MEASURES

- Assessing and planning work at height



Assessing and planning work at height

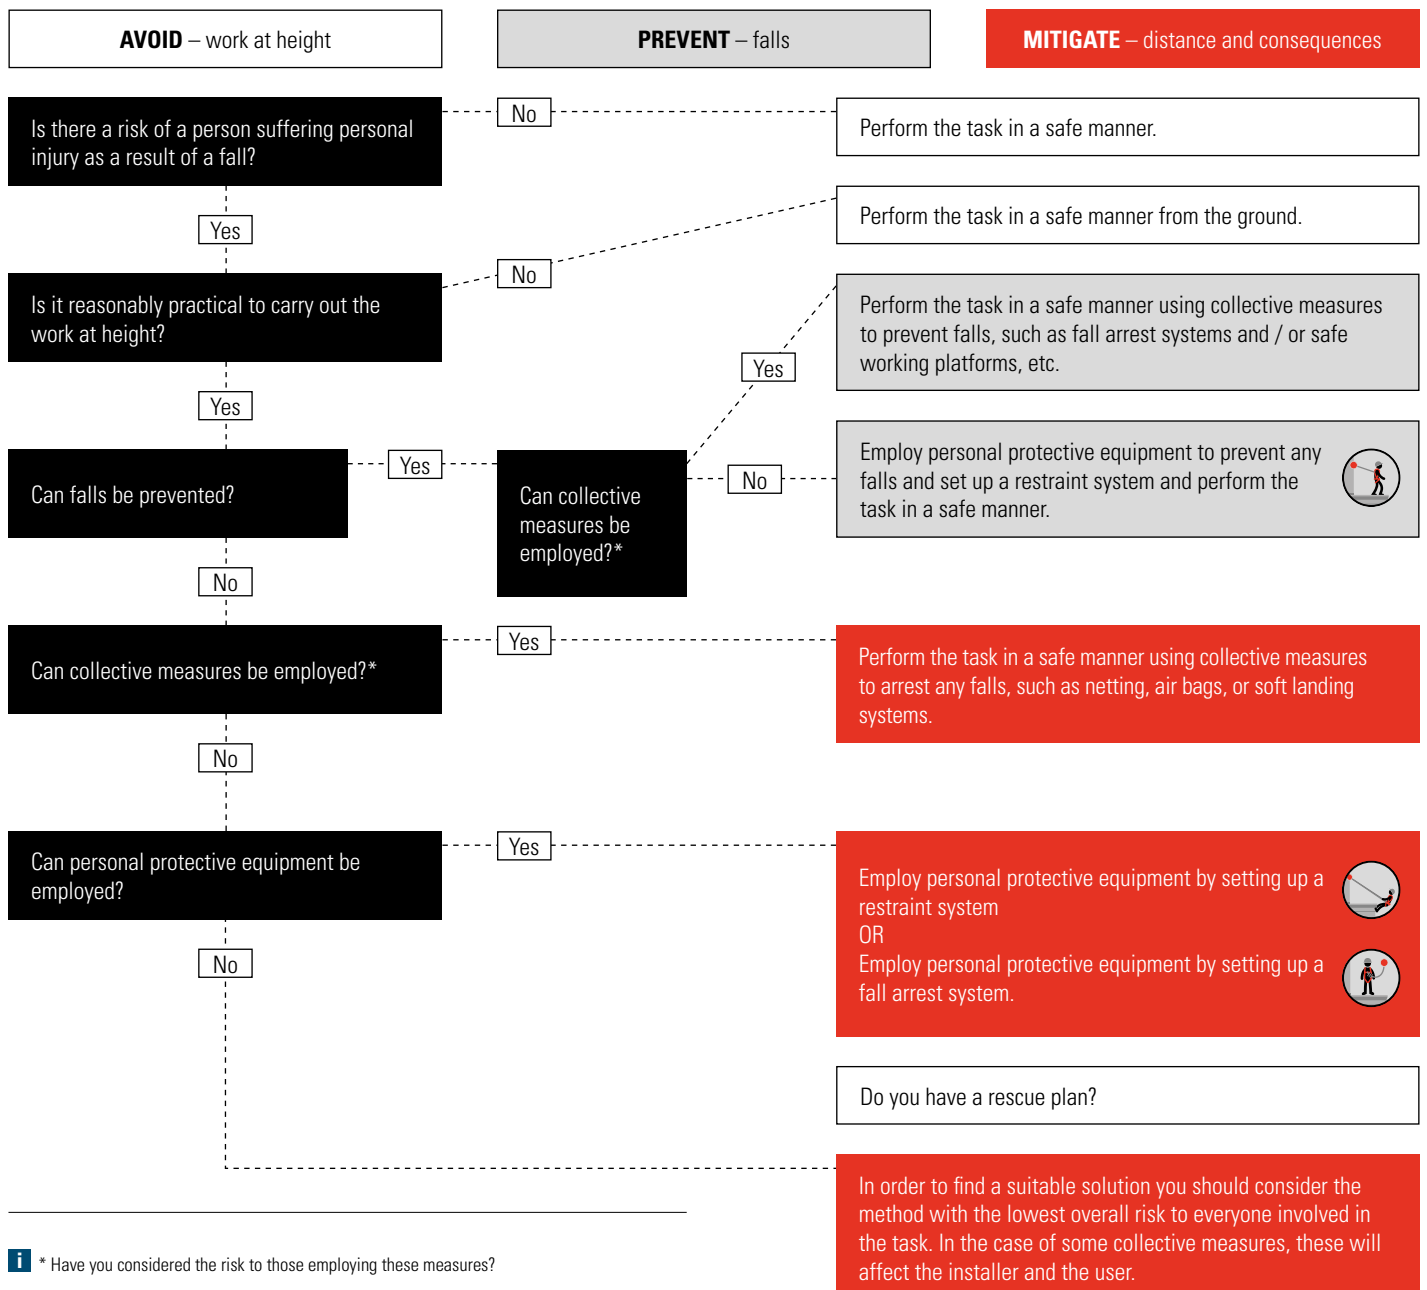

i * Have you considered the risk to those employing these measures?

HEIGHT SAFETY MEASURES

- Laws, provisions and directives



Laws, provisions and directives

EU Directive 89/686 is applicable in Europe. In addition to this, the Industrial Safety and Health Ordinance (BetrSichV), the Occupational Health and Safety Act (ArbSchG) and the provisions of the BG/ DGUV apply in Germany. All companies in Germany are obliged by law to systematically ensure occupational safety and health protection and to carry out a risk assessment for all workplaces and work equipment.

Hazard identification and field of application

When selecting and employing personal protective equipment against falls (PPEaF), the tasks to be completed, the local circumstances and especially the risks to be averted have to be taken into account.

The following general rule applies:

Whenever construction, installation, repair and maintenance works harbour the risk of falling, organisational or technical protective measures such as scaffolding, railing or safety nets must in the first place be provided.

Personal protective equipment against falls (PPEaF) is to be used wherever the technical precautions mentioned above cannot be put into practice or whenever this would involve a disproportionate effort.

As a general rule, precautions have to be taken as soon as there is a risk of falling. The BG/DGUV rules provide more detailed examples.

Inspection and maintenance

Inspections have to be carried out prior to each use and at least once a year, or even more frequently depending on the operating conditions and the operational situations. They are carried out by an expert and require the utmost care. Elements of the personal protective equipment

(PPEaF) that are activated during a fall may only be reused after an inspection. Webbing or connectors with visible defects must not be reused. Do not take a risk!

Discard age/product life cycle

The SpanSet standard products have a life cycle of ten years from the date of manufacture; this also applies if they are not used.

Products have to be discarded if they:

- do not pass a thorough inspection
- are subject to a fall or arrest a fall
- reach the expiry date (end of the life cycle)

Maintenance work

Only the manufacturer or a person authorised by the manufacturer may perform maintenance work. Personal protective equipment against falls for which product details cannot be ascertained and that do not bear a CE mark has to be discarded.

Store and care

Personal protective equipment against falls is to be stored in dry, clean and light-protected rooms.

Evaluation and analysis

We would be glad to assist you in evaluating and analysing the risks of falling at your workplace and offer you our professional advice and support in order to meet the complex requirements placed on safety and compliance with the legal provisions.

Check-up service

You can either send us your PPEaF for the yearly check-up or request our mobile check-up service. The inspected, intact products will be marked and registered, and you will receive an inspection certificate after each check-up. We also check third-party products. Just ask us!

Training

What use are the most perfect systems if they are not employed properly? For this reason, our commitment to safety does not stop with the development and manufacture of leading safety products. Both in our training centre in Übach-

Palenberg and on-site at your facilities we offer you a one-day basic height safety training. We look forward to teaching you about the various types of equipment, techniques and the correct use of PPE against falls and for rescue scenarios.

Find out more by visiting us at

www.spanset-seminare.de

or simply ask us for information!



Simply capture the code with the QR reader using your mobile phone.

www.spanset-seminare.de/...höhensicherung

Overview of the relevant EN standards

EN 341:	PPEaF – Descender devices for rescue
EN 353-1:	PPEaF – Guided type fall arresters including a rigid anchor line
EN 353-2:	PPEaF – Guided type fall arresters including a flexible anchor line
EN 354:	PPEaF – Lanyards
EN 355:	PPEaF – Energy absorbers
EN 358:	PPEaF – Work positioning, work restraint
EN 360:	PPEaF – Fall arresters
EN 361:	PPEaF – Full-body harnesses
EN 362:	PPEaF – Connectors
EN 795:	PPEaF – Anchor devices/anchor points
EN 813:	PPEaF – Sit harnesses
EN 1496:	PPEaF – Rescue lifting devices
EN 1497/98:	PPEaF – Rescue harnesses/rescue loops




HEIGHT SAFETY MEASURES

- Laws, provisions and directives

When using personal protective equipment against falls, users must ensure that there is adequate clearance between the anchor point and the floor and that there are no dangerous objects or obstacles below the secured person.

In principle, the length of the fall arrest has to be such that an impact is avoided. The ability of the human body to absorb energy when falling into a rope is limited, which is why only lanyards with energy absorbers may be used in fall arrest systems. At a vertical drop of 4 m, a person weighing 100 kg is subjected to a force of around 22 kN (approx. 2.2 tons!), which can have fatal consequences.

EN-conform energy absorbers reduce the force to a tolerable level of max. 6 kN (approx. 600 kg). The production of fall arrest products has to be in line with the European standards. Each product has to be labelled and, among other markings, show the CE mark and the number of the EN standard to be complied with. In doing so it must be taken into account that these standards can vary depending on the product and application. For this reason it is important that the user chooses the correct products that meet the requirements of each application.

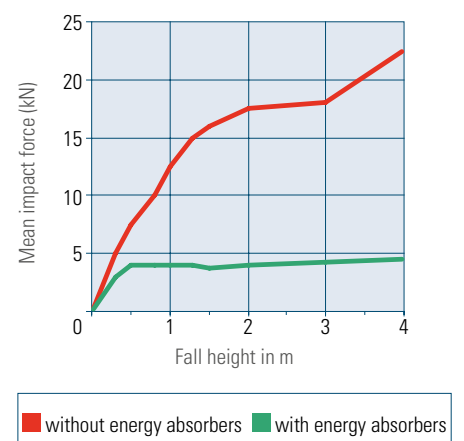

HEIGHT SAFETY MEASURES

- Take the right measures



Take the right measures

Hierarchy of height safety measures for the use of PPEaF

Before commencing any work activities at height it must be ensured that the best possible and safest personal fall arrest solution was chosen. The decision for the correct work method calls for a careful evaluation of the available alternatives. A hierarchy of height safety measures offers decision-making support. The higher up in the hierarchy, the better and safer the solution is and the lower the potential risk for the user.

Hierarchy of height safety measures:

1. Prevention
2. Work restraint
3. Work positioning
4. Fall arrest

Whenever possible, avoid unnecessary work activities at height and always resort to fall arrest systems as the last possible option.



Training

When working at height or in confined spaces or in the event of rescue and salvage operations – it is absolutely essential that the user knows and understands the various types of equipment as well as the techniques and the correct use of personal protective equipment against falls. Without adequate training, the use of this material can become a risk.

Work restraint



A work restraint system involves techniques that restrict the movement of the user. By means of a single secure anchor point, this system secures the person with a lanyard, thus preventing them from falling over the edge or from approaching areas with a risk of falling.



Horizontal




Gentle slope



Working platform

Restraint system/ work positioning



Masts



Towers



Industrial climbing

Fall arrest



Horizontal



Vertical



Towers

This is the only category that actually allows a fall to take place. By means of a harness and a suitable lanyard with energy absorbers or a fall arrest device, the user is secured such that the fall is arrested in a controlled manner.


Confined spaces



Confined spaces

Both when descending into and climbing out of poorly accessible confined spaces with limited space, such as manholes, pits, and canals, the user has to be secured by a second person by means of anchoring devices and height safety devices, and it must be possible to rescue the user in case of an emergency.

Rescue




When performing work at height, the issue of rescue must not be neglected. Depending on the position and situation, the rescue and retrieval of persons who were caught by a fall arrest system require special equipment or rescue techniques.

This aspect has to be taken into account when evaluating the appropriate height safety system.

HEIGHT SAFETY MEASURES

- Take the right measures

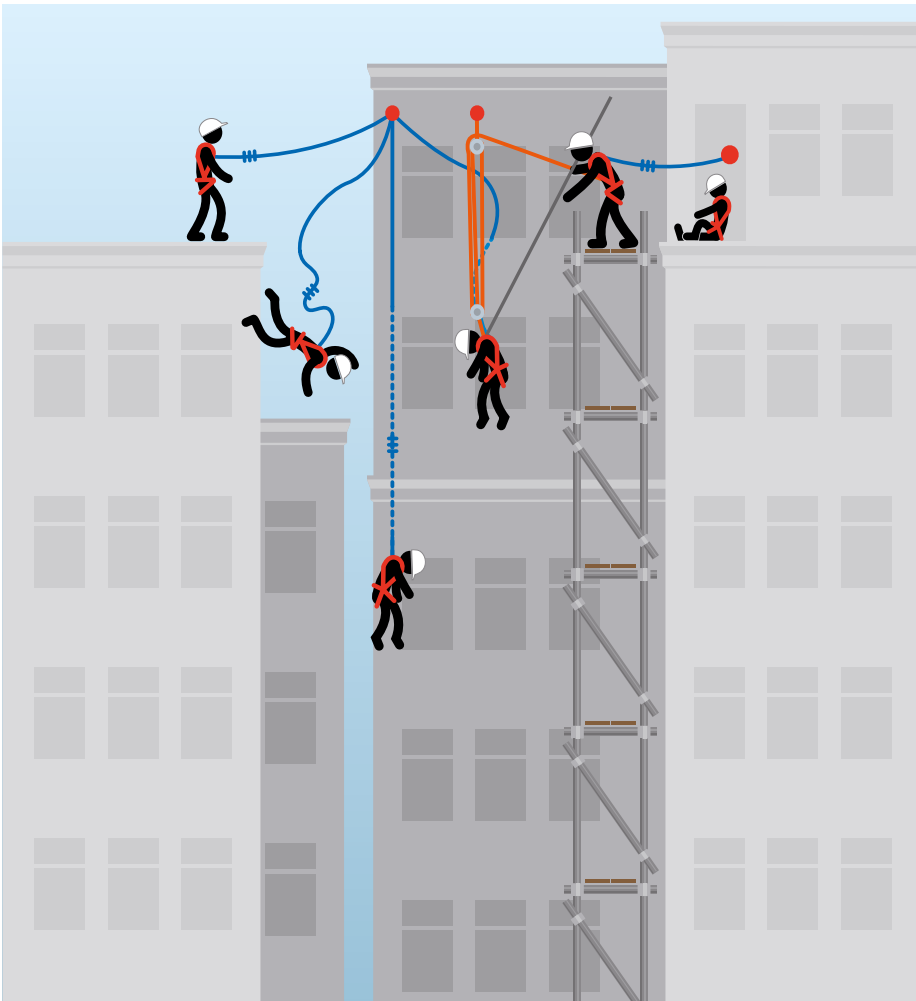

What you need to know:

1 When performing work at height, always follow the hierarchy of height safety measures:

- **Prevention** – Prevent unnecessary works at height
- **Fixed-line access** – Use walkways and scaffolding when available
- **Working platforms** – Whenever possible, use lifting platforms when working at height
- **Collective safety measures** such as scaffolding, handrails or safety nets have priority over personal protective equipment

There are three main categories for the use of personal protective equipment against falls:

-  Work restraint
-  Work positioning
-  Fall arrest

2 If there is a risk of a fall, you have to be secured

- **Never carry out work alone**
- **Take into account the available clearance**

- **Plan the rescue measures before commencing work**

PPE against falls has to include:

- **Anchor point** acc. to EN 795
- **Full-body harness** acc. to EN 361
- **Fall arrester / lanyard** that:
 - arrests the fall
 - reduces the shock absorption impact to max. 6 kN
 - limits the braking distance
 - prevents collision with objects
- **Safety helmet** acc. to EN 12492 + EN 397

3 Possible consequences of a fall for the affected person

The falling person can suffer an injury as a result of falling onto objects or structures. The resulting shock absorption impact can cause injuries. Prolonged free suspension in the harness can lead to problems.

4 Prolonged suspension in the harness can lead to suspension trauma

If you are suspended in the harness after a fall, pressure points can develop, which can in turn restrict circulation. The key prerequisites for preventing a suspension trauma are: correct fitting and adjustment of the harness. The chest part must never carry any weight, and the

body weight has to rest on the seating part. If the harness is not installed correctly, an orthostatic shock can ensue: the blood collects in the lower part of the body, resulting in an insufficient supply of blood to vital organs.

The risk of an orthostatic shock can be prevented by:

- Correct adjustment of the harness; to check the harness for a correct fit, suspension tests can be performed.
- Rapid rescue from the suspended position; the necessary rescue equipment should be at hand for this. For these kinds of work activities, a safety person always has to be available, so never let anybody work alone.

First aid in the event of an orthostatic shock

If there is a risk of an orthostatic shock, the injured person must under no circumstances be put in a horizontal position after the rescue, as the backflow of larger volumes of blood into the upper part of the body can lead to cardiac overload. The injured person has to be supported in a crouching position and the doctor should be informed about the possible risk of shock.

5 Rescuing the injured person

The following general rule applies: rescue operations may only be performed by specially trained professionals.


Inadequate skills endanger the injured person and the rescuer. In any case, attend to the injured person and call for additional help such as a doctor, fire department, etc. There are different ways of rescuing a person who has suffered a fall. Think about the correct method before commencing your work. Always avoid endangering other persons during the rescue operation.

HEIGHT SAFETY MEASURES

- Calculating the fall height



Calculating the fall height

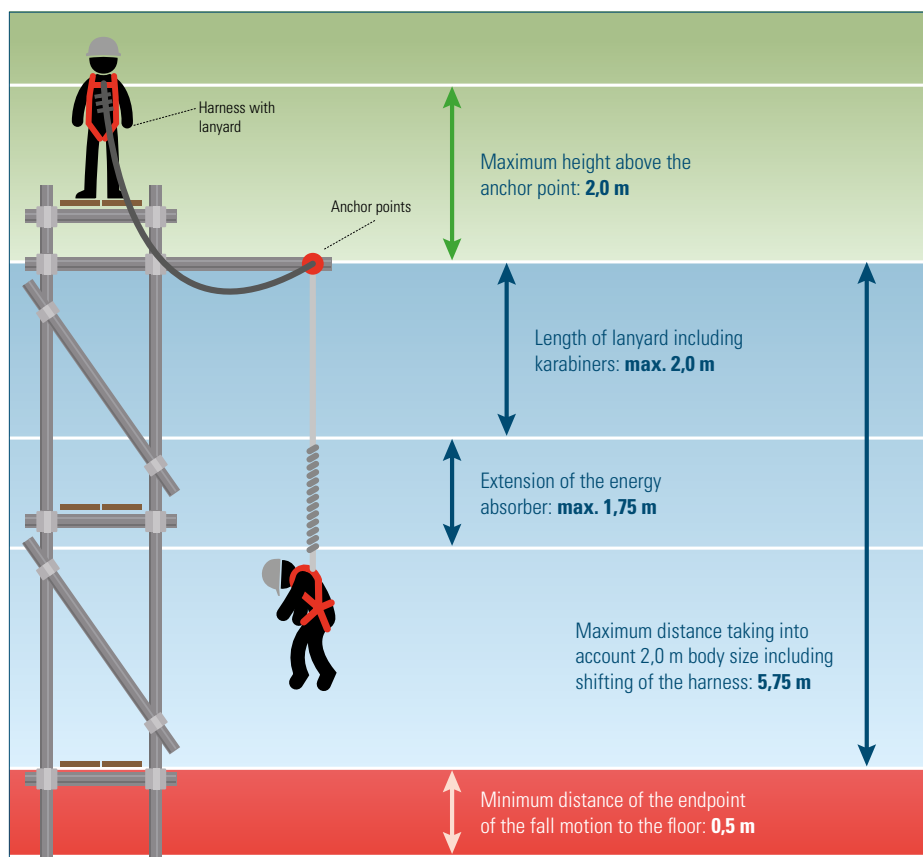

Every user must take into account that sufficient downward clearance is required during a fall to prevent a collision with underlying structural elements.

But how much clearance is enough?

The necessary clearance is calculated on the basis of numerous parameters:

- Length of the lanyard
- Height of the anchor point in relation to the anchor point on the harness
- Height of the user
- Fitting accuracy of the harness


As a general rule, in addition to the length of the lanyard, one adds the distance that it „tears open“ to reduce the force on the user (see explanation on page 22).

In this context, EN 355 stipulates a maximum tear length of 1,75 m, which equates to a maximum length of the lanyard of 3,75 m! This corresponds to a clearance of up to 6,25 m below the anchor point! Should this level of clearance not be available, the user either has to shorten the lanyard or select a higher anchor point.

The clearances that result from these combinations can be found in the table on the right.

HEIGHT SAFETY MEASURES

- Calculating the fall height

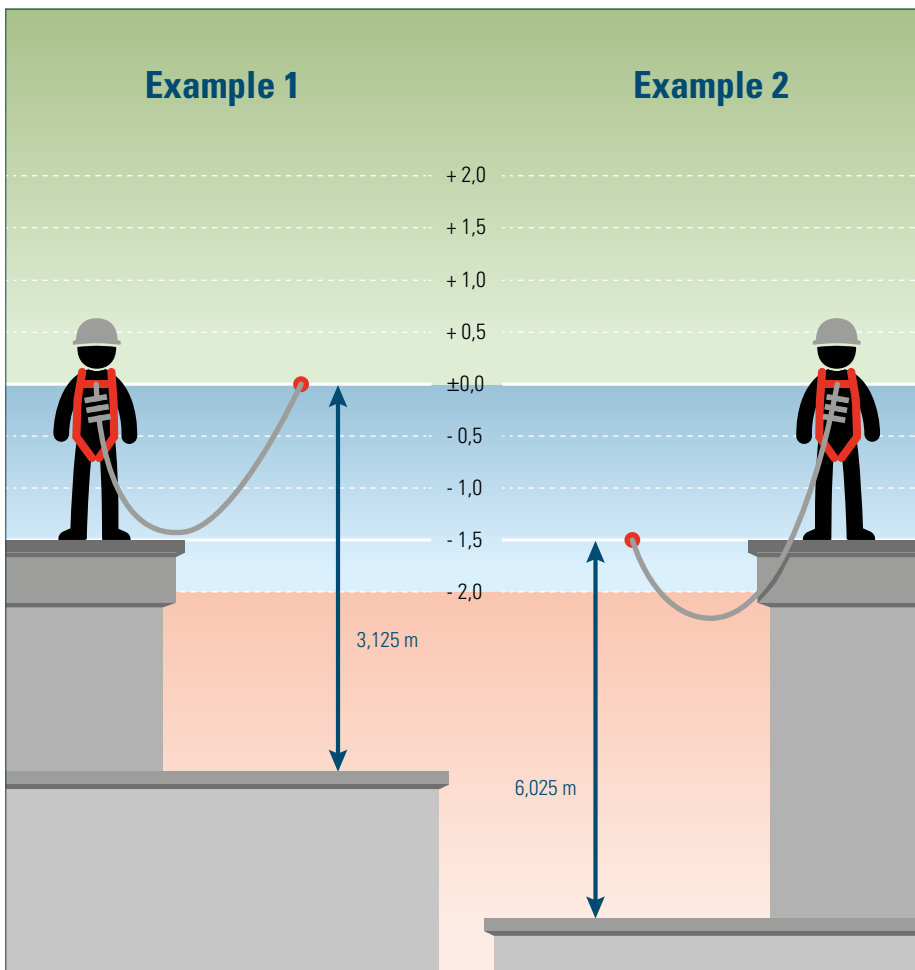

How to calculate the required clearance!

Determine the difference in height between the two anchor points of your lanyard. We define the chest or back anchor point of your harnesses as the zero point (see illustration on the left). Now measure how much higher/lower your anchor point on the building/abutment is in relation to this.

The maximum possible difference in height can be ± 2 m.

Use the table on the bottom left to calculate the necessary clearance depending on your position (foot level).

The table takes into account a body size including harness displacement of up to 2 m including a safety distance of 0,5 m.

1 Example 1:

Your lanyard is attached at the same height as on your harness (± 0 m) and you are using a lanyard of 1,5 m. According to the table, you need a clearance of 3,125 m under your feet.

2 Example 2:

Your lanyard is attached to your feet (-1.5 m) and you are using a lanyard of 2 m. According to the table, you need a clearance of 6.025 m under your feet.

Distance between anchor points on the structure and harness	Required distance to the floor		
	1 m lanyard	1,5 m lanyard	2 m lanyard
+ 2,0 m	-	-	1,000
+ 1,5 m	-	1,000	1,700
+ 1,0 m	1,000	1,700	2,400
+ 0,5 m	1,700	2,400	3,125
$\pm 0,0$ m	2,400	3,125	3,85
- 0,5 m	3,125	3,850	4,575
- 1,0 m	3,850	4,575	5,300
- 1,5 m	-	5,300	6,025
- 2,0 m	-	-	6,750

HEIGHT SAFETY MEASURES

- Education and training Height Safety

Education and training Height Safety

Objectives

The participant receives enough theoretical and practical training to allow him to be familiar with the operational limits of PPEaF and to minimise the risk when using such equipment. He is familiar with the applicable legal foundations and engineering practices, which allows him to assess the operational safety of the equipment and to know how to employ it correctly, as well as the necessary controls and the correct storage of the equipment.

Target group

All persons who carry out work at height, who have to wear harnesses and lanyards during their work or who deal with height safety concerns.

Contents

Transfer of knowledge and application concerning height safety and PPEaF. Selection procedure of fall arrest systems and practical exercises.

Duration

1 to 2 days

We would be pleased to make you an offer tailored to your needs and requirements.

Ask us about it!



i Simply capture the code with the QR reader using your mobile phone.

www.spanset-seminare.de/...höhensicherung




HARNESSES

- Why use harnesses from SpanSet?



All SpanSet harnesses offer:

- 1 Hard-wearing polyester webbing that is supple and conforms to the user's shape
- 2 Eyelets and buckles, made of galvanised or stainless steel depending on the model, offer high corrosion resistance and ease of adjustment
- 3 Additional reinforcements at high-wear areas where required
- 4 Standard-compliant, clear labelling with an individual serial number for traceability and an additional protective film for abrasion protection
- 5 Instructions for use with pictograms
- 6 The colours of the seam patterns differ from the webbing for ease of inspection of the harnesses
- 7 Web ties to secure loose ends

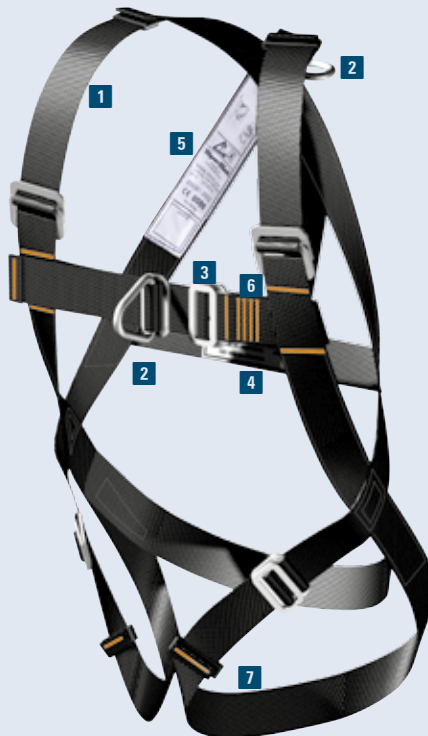

All standard harnesses are equipped with IDXpert®

Locking systems

SpanSet harnesses come with two different locking systems.

The practical quick-release buckles make the harnesses even faster and easier to put on. To ensure your safety, a green dot becomes visible when the buckle is closed correctly. The lock system does not allow for unwanted opening.

The tried-and-tested tri-glide buckles are easy and quick to adjust. They are resistant to soiling, for example by cement dust.



Quick-release buckles



Tri-glide buckle

Why use harnesses from SpanSet?

SpanSet follows two major principles in the development of its products: On the one hand we make sure that a product complies to the European standards, while on the other hand we ensure that it is fit for purpose and meets the requirements of daily work.

These two goals can be very different, for example our ATLAS lanyard and our ATLAS harness for larger workers: While both designs meet the respective standards, they have additional functions that are tailored to the particular requirements of the user. SpanSet harnesses have been designed with the worker in mind.

According to our design criteria, the harness should be constructed from materials that conform to the shape of the worker and offer the largest possible freedom of movement and optimal comfort of wear. The harnesses should be easy to put on and adjust. In the event of a fall – in an actual worst-case scenario – they should support the user in the right place without undue stretch or distortion.

SpanSet harnesses are supplied with:

Clear instruction manual	_____
Unique serial number	_____
Individual certification and inspection record	_____
Pocket guide	_____

A range of practical details and sophisticated functions clearly show that SpanSet harnesses were designed on the experience of practical application, and offer maximum safety with high comfort of wear.

No matter at what height you are working: our harnesses are a reliable partner at every level.

HARNESSES

- 1X-harness
- 2X-harness
- 2X-harness „EXCEL“



1X-harness (EN 361)

Particularly light-weight and easy-to-fit harness with an anchor point on the back, with tri-glide buckles.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D038977	1,1	1	–	Standard



2X-harness (EN 361)

Particularly light-weight and easy-to-fit harness with one front and rear fall arrest attachment, optionally with **1** tri-glide buckle or **2** quick-release buckles.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
1 D038060	1,1	2	–	Standard
2 D021357	1,1	2	–	Standard



2X-harness (EN 361) „EXCEL“

Particularly light-weight and easy-to-fit harness with one front and rear fall arrest attachment, with quick-release buckles and comfortable shoulder and back padding.



Optional: with waist belt pursuant to EN 358 with 2 work positioning attachment points for the work position lanyard and 3 tool attachment rings

Article number	Weight [approx. kg]	Waist belt	Fall arrest attachments	Work positioning attachment points	Size
D027105	1,1	–	2	–	Standard
D039760	2,1	✓	2	2	Standard



HARNESSES



- 2X rescue harness
- 2-point harness „Atlas“
- Harness „Clima“

2X-rescue harness (EN 361)

Harness with one rear and front fall arrest attachment, with a tri-glide buckle. With an extension strap with a work positioning attachment point to allow for retrieval of the injured person in a vertical position. If not required, the extension strap can be easily attached to the back by means of a Velcro strap.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D042614	1,3	2	–	Standard



2-point harness (EN 361) „ATLAS“

Persons with size XL and weighing up to 140 kg need an extra large and robust harness. „ATLAS“ has been specially designed for larger sizes and tested accordingly. One rear and front fall arrest attachment, optionally with **1** tri-glide buckle or **2** quick-release buckles.

Optional: with a waist belt according to EN 358 or back padding (see 2X-harness (EN 361) „EXCEL“)

Article number	Weight [approx. kg]	Waist belt	Back padding	Fall arrest attachments	Work positioning attachment points	Size
1 D003346	1,3	–	–	2	–	XL
2 D035726	1,3	–	–	2	–	XL
2 D042916	1,3	–	✓	2	–	XL
2 D046310	1,3	✓	–	2	2	XL
2 D047935	1,3	✓	✓	2	2	XL



Harness (EN 813) „Clima“

Designed for professional applications for which work can be performed while temporarily suspended or seated in the harness, thanks to an integrated padded seat belt and a loop. With an extra wide comfortable waist strap with 2 work positioning attachment points for the work position lanyard. With one rear and front fall arrest attachment as well as multiple tool eyelets and loops. Shoulder strap with quick-release buckle. Ideal for fall arrest applications, for rescue, work positioning, climbing and rope access use.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D051584	2,2	2	3	Standard



HARNESSES

- „MWEP-Pro“/“MWEP-Pro 2” harness
- „ScaffPro” harness



Harness (EN 361) „MWEP-Pro” and „MWEP-Pro 2”

The MEWP-Pro and MEWP-Pro 2 harnesses were specially designed for users of lifting platforms and working platforms. Special attention was paid to ease of use (handling) and a safety function that is particularly important on and around building sites. The MEWP-Pro with its adjustable work position line in the front attachment point is designed for delivery drivers. The harness can be worn during short journeys in a lorry without getting in the way. The MEWP-Pro 2 with its 2 attachments points is designed to allow flexible working on lifting platforms.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D062239	1,9	1	–	Standard
D062240	1,9	2	–	Standard



Harness „ScaffPro” (EN 361)

A harness that makes daily work with fall arrest as easy as possible for workers on the building site. If long distances in particular and transporting materials on the shoulders are part of your daily tasks, then this specially developed, light-weight harness with an innovative lateral seam and easy-to-use quick-release catches in the leg area is the secure companion for this type of work. A protective sleeve protects the harness from external influences.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D057414	auf Anfrage	2	–	Standard
D057415	auf Anfrage	2	–	XL



HARNESSES JACKETS



- 1X-harness jacket (EN 361) „Driver“
- 2X-harness jacket (EN 361)

More than just an eye-catcher

SpanSet harness jackets are full-body harnesses and safety vests all in one! The integrated harness can be adjusted at the leg loops, chest and shoulder straps. The water-resistant and breathable safety vest is easy to open, which allows for a visual inspection of the harness.

Practical standard size „Multifit“

So that the vest really fits any- and everybody: simply open the integrated middle piece and turn the standard size into L or XL.



1 Open the Velcro strap on the inside and, depending on your needs, remove one ...



2 ... or both sides of the extension panels ...



3 Done!

1X-harness jacket (EN 361) „Driver“

High-visibility full-body harness jacket with reflective strips. With a fall arrest attachment on the extension strap. Thanks to the Multifit system, the harness can be enlarged to size XL, with a quick-release buckle, 2 front pouches and 2 side pouches.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D056215	1,9	–	2	Standard



2X-harness jacket (EN 361)

High-visibility full-body harness jacket with Inox fall arrest attachments and reflective strips. Harness with one rear and front fall arrest attachment, with a tri-glide buckle. Thanks to the Multifit system, the harness can be enlarged to size XL, with a quick-release buckle, 2 front pouches and 2 side pouches.

Article number	Weight [approx. kg]	Fall arrest attachments	Work positioning attachment points	Size
D037637	1,9	2	–	Multifit



LANYARDS

- Why use lanyards from SpanSet?



Why use lanyards from SpanSet?

SpanSet lanyards have been designed with the actual application in mind. Our design criteria stipulate that the lanyards should have an adequate length for the task, without compromising the safety of the worker. With its karabiners, the lanyard should allow for easy attachment to other compatible elements.

Careful selection will ensure that the worker can carry out the task safely and effectively. Our lanyards made of polyester webbing measuring 25 to 35 mm in width serve as a way of connecting the user to a fixed anchor point. They may only be used in conjunction with a harness compliant with EN 361.

Lanyards with tear-off function


To ensure your safety we take advantage of the knowledge from weaving mills: the tear-off strap. Following this method, our energy absorbers are manufactured from two interwoven webbing straps. When subjected to an abrupt force, these straps tear open slowly and evenly. In this way, the drop energy that is exerted on the body is limited to a maximum of 6 kN in accordance with the standards.


SpanSet lanyards are cost-effective and can be purchased with a wide range of connectors and configurations.

Important instructions – for your safety

To minimise the drop height, a relatively high anchor point should be selected whenever possible. The anchor point has to withstand a force of 10 kN (approx. 1000 kg).

In extreme cases, SpanSet energy absorbers extend by another 1,5 m in the event of a fall (braking distance). Always clip the end with the energy absorber strap into the harness.

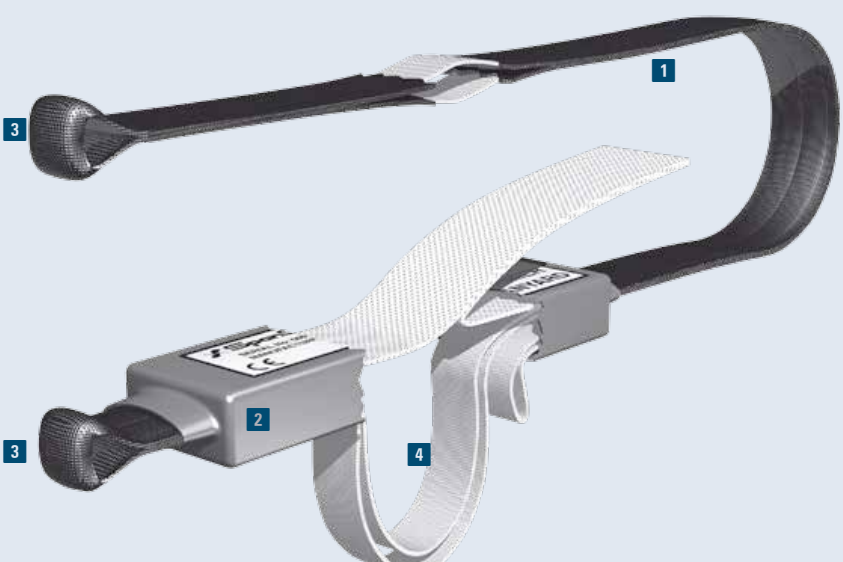



All standard lanyards are equipped with IDXpert®

All SpanSet lanyards offer:

1 Hard-wearing polyester fibre

2 Clear labelling showing the model, year of manufacture, standards tested to, the inspection and an individual serial number for traceability

3 Additional reinforcements at high-wear areas where required

4 Integrated shock absorber strap with tear-off function, all energy absorbers are tested to EN 355

SpanSet harnesses are supplied with:

Clear instruction manual	
Unique serial number	
Individual certification and inspection record	
Pocket guide	

LANYARDS

- Fixed-length lanyard
- Elasticated lanyard
- Adjustable lanyard
- ATLAS lanyard



Fixed-length lanyard (EN 355)

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D013213	TP-G 2024	2,0	Screw karabiner ML 2	Scaffold hook
D013211	TP-G 2023	2,0	Screw karabiner ML 2	Twistlock karabiner
D013200	TP-G 2022	2,0	Screw karabiner ML 2	Screw karabiner ML 2

Elasticated lanyard (EN 355)

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D020848	TPE-G 2024	2,0	Screw karabiner ML 2	Scaffold hook
D019244	TPE-G 2034	2,0	Twistlock karabiner	Scaffold hook

Adjustable lanyard (EN 355)

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D013218	TPA-G 2033	1,2–1,8	Twistlock karabiner	Twistlock karabiner
D038821	TPA-G 2034	1,3–2,0	Twistlock karabiner	Scaffold hook

ATLAS-lanyard (EN 355)

The ATLAS lanyard is the corresponding lanyard for the ATLAS harness, including energy absorber straps and karabiner hooks with a total length of 2,0 m and tested for weights of up to 140 kg.

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D022611	ATLAS-G 2034	2,0	Twistlock karabiner	Scaffold hook



LANYARDS

- Fixed-length Y-lanyard
- Elasticated Y-lanyard
- ATLAS-Y-lanyards
- DSL-lanyards



Safe ascent with Y-energy absorber elements

Y-shaped lanyards are designed, for example, for working on unsecured ladders or grid structures. Thanks to the two safety hooks you are always secured by one hook while repositioning the other hook.



Fixed-length Y-lanyard (EN 355)

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D013220	TPD-G 1534	1,5	Twistlock karabiner	Scaffold hook
D016768	TPD-G 2034	2,0	Twistlock karabiner	Scaffold hook



Elasticated Y-lanyard (EN 355)

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D029405	TPDE-G 2024	1,5	Screw karabiner ML 2	Scaffold hook
D037000	TPDE-G 2054	2,0	Trilock karabiner	Scaffold hook



ATLAS-Y-lanyard (EN 355)

The ATLAS-lanyard provides the fitting lanyard for the ATLAS-harness, including energy absorber straps and karabiner hooks with a total length of 2,0 m and tested for weights of up to 140 kg.

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D036153	ATLAS D-G 2034	2,0	Twistlock karabiner	Scaffold hook



DSL-lanyard (EN 355)

The DSL-lanyard has been tested to EN 355 and EN 360 and combines the advantages of lanyards and height safety devices. The energy absorber can easily be fitted on the back of the harnesses, which provides an even larger work radius than regular lanyards with energy absorber straps. In spite of using scaffold hooks, the DSL lanyard has a low tare weight, which makes working even more economical. Annual inspections by an expert can be performed, casings do not have to be opened.

Article number	Designation	Length [m]	Karabiner user side	Karabiner anchor side
D061587	DSL-12A	2,0	Twistlock karabiner	Scaffold hook



KARABINER

- Screw karabiner ML 2
- Twistlock scaffold hook
- Trilock karabiner
- Screw karabiner NZ09
- Twistlock karabiner
- Screw karabiner DZ09

Other karabiners for lanyards



Screw karabiner ML 2



Twistlock scaffold hook



Trilock karabiner



Screw karabiner NZ09



Twistlock karabiner



Screw karabiner DZ09

ROPE RESTRAINT LANYARDS

- RARL 329 rope restraint lanyard
- Horizontal work position line „Clima WPL“



Vertical and horizontal safety

Whenever work activities involve a risk of falling, the user has to be secured. If no collective measures are at hand, such as e. g. scaffolding, railings or safety nets, our safety lines are the ideal solution.

The **vertical safety lines** (travelling fall arresters attached to a movable guide) have a travelling, mechanical stopper that reliably locks into place in the event of a fall.

The **horizontal work position lines** can be used both as a rope restraint lanyard during work positioning or as a work position line. Using the shortening device, the length of the line has to adjusted such that the worker is able move around freely up to the edge of the structure.

Every SpanSet line is marked with the year of manufacture, along with a unique serial number, which ensures the


traceability of each individual rope. A colour-coded thread on the inside of the lines indicates the EN number and the type of line.



RARL 329 rope restraint lanyard (EN 355)

The RARL is designed purely as a rope restraint lanyard. It prevents the worker from reaching the edge of a structure and from falling down. Here it is important to note that the length should always be kept as short as possible, but as long as needed. Lengths of approximately 0,9 m to 1,4 m can be achieved with the 12 mm kernmantle rope. The lanyard comes with a screw karabiner and a Twistlock karabiner made of steel.

Article number	Designation	Weight [kg]	Length [m]	max. length [m]
D013215	Rope restraint lanyard for lifting platforms	1	0,9	1,4



Horizontal work position line „Clima WPL“ (EN 358)

Polyamide kernmantle rope, diameter of 11 mm, with a Twistlock karabiner on one end as well as a lanyard of approx. 70 cm at the shortening device end. Not designed to arrest a fall!

Article number	Designation	Weight [kg]	Length [m]
D017236	ClimaWPL	2,0	10



ROPE RESTRAINT LANYARDS



- Fall arrest system „Clima VL“
- Rope restraint lanyard „WPLANY 2M“

Fall arrest system „Clima VL“ (EN 353-2)

This temporarily installed fall arrest line is designed for work on ladders, masts or stacking cranes in high-bay pallet warehouses. The anchoring line can be positioned by means of the anchoring sling and tensioned using with the rope clamp. The fall arrester is supplied with a short attachment lanyard and can either be permanently fitted to the anchoring sling or secured to the worker's harness. The kit comes in a shoulder bag for easy transport and storage.

Recommended accessories:



Article number	Designation	Weight [approx. kg]	Length [m]
D037806	CVL-15	2,5	15
D037809	CVL-20	2,9	20
D049130	1 CVL-VL	0,5	0,4
D041863	2 CVL-BUDDY	0,4	—



Rope restraint lanyard „WPLANY 2M“ (EN 358)


This lanyard is easily adjustable to a maximum length of 2 m. It is surrounded by a sleeve that protects the rope from wear and damage during anchoring. The system comes with a screw karabiner on one end and a Twistlock karabiner for easy attachment.

Article number	Designation	Weight [approx. kg]	Length [m]	Karabiner
D013232	WPLANY	1	2	Safety swivel hook
D048960	WPLANY	1	2	Twistlock karabiner



ANCHOR DEVICES AND POINTS

- HD Tripod
- Winch for HD Tripod
- Bracket for SVLRB
- Bracket for winch

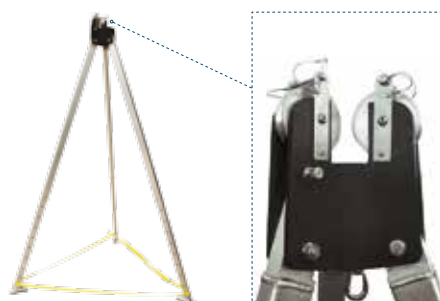

HD Tripod

The aluminium HD (heavy-duty) tripod was developed for tough working conditions and for long-term use and is perfectly suitable for industrial applications. Right-angled, fully adjustable legs and a head piece made of one single piece prevent damage. Two integrated guide pulleys and an additional anchor point allow for many different options and combinations for entry, exit and rescue equipment. Retractable to a height of 2,7 m.

Article number	Designation	Height [mm]	Weight [approx. kg]	WLL [kg]	Material
D053832	TRIPOD-HD	1.860	24	350 (max. 2 persons)	Aluminium

Winch for HD Tripod

This personnel and load winch (WLL 140 kg) enables the lifting or lowering of goods and persons, for example from and into confined spaces. Together with the bracket (see below) the winch can be optimally attached to the HD tripod. If you use this winch with a person suspended from the hook, the person should also be secured by means of a back-up system in the shape of a fall arrest device of vertical safety line. The rope length of the RW winch is 20 m.



Article number	Designation	Rope length [m]	Weight [kg]	Material
D053834	RW winch	20	11	Metal



Bracket for SVLRB

The bracket can be used to easily and rapidly attach your fall arrest equipment to the HD tripod.

Article number	Designation
D054280	Bracket SVLRB-15
D053833	Bracket SVLRB-18



Bracket for winch

Article number	Designation
D053836	Winch

ANCHOR DEVICES AND POINTS



- Single anchor point „Safepoint“
- Single anchor point „Starpoint“
- Free-standing anchor point „TETRAGON“

One secure anchor point

The quality and efficiency of a fall arrest system depends, among other factors, on the strength of the anchoring point to which the lanyard is attached.

For this reason it is exceedingly important that the lanyards, height safety equipment and safety lines, for example, are attached to a sufficiently strong anchor point.

European standard EN 795 stipulates that the anchor point must withstand a load of 10 kN (approximately 1000 kg).

Single anchor point „Safepoint“ (EN795)


Can be attached to concrete and steel, e.g. on façades, roof ridges or next to windows. Made of aluminium and available in different colours. Installation with chemical dowels and threaded rods in concrete with a minimum quality of B25 or with M12 screws in steel. (supplied without installation material)

Art.-Nr.	Bezeichnung	Farbe	Länge [mm]	Breite [mm]	Höhe [mm]
D064745	AP-SP-A	silver	130	60	60
D064748	AP-SP-R	red	130	60	60
D064751	AP-SP-S	black	130	60	60



Single anchor point „Starpoint“ (EN 795)

Anchor point for installation in steel. Can be rotated to ensure correct load-bearing in the direction of force. For permanent use outdoors, the Inox version is recommended.



Art. No.	Colour	WLL	Material	D [mm]	E [mm]	T [mm]	Thread length [mm]
D064871	gelb	1 Pers.	G8	30	M12	56	18
D056975	gelb	2 Pers.	G8	35	M16	65	24
D064872	gelb	1 Pers.	Inox	30	M12	56	18
D064873	gelb	2 Pers.	Inox	35	M16	65	24



Free-standing anchor point „TETRAGON“

The „TETRAGON“ is a particularly high anchor point for flat roofs that is held by its own weight. In the event of a fall, it absorbs the resulting forces by displacing them. It can be used either as a permanent single anchor point or as an end or intermediate anchor point for anchor devices.

Art. no.	Designation	No. of users	Weight [kg]	Length x width [m]	Height [mm]
D064759	LWS65012-12	1	413	1 x 1	500
D064760	LWS65016-16	2	413	1 x 1	500




ANCHOR DEVICES AND POINTS

- Roof hooks for pitched roofs
- Proof Loader Kit
- SpanAnchor
- Anchoring beam



Roof hook for pitched roofs (EN 795, EN 517)

Quick-mount hook, certified for the substrate in accordance with EN 517 and EN 795, also tested for rafter-mounted insulation, including 2 galvanised fixing screws 8 x 220 mm.

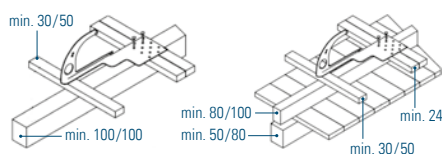

Article number	Material	Colour
D064754	galvanised steel	natural grey
D064755	galvanised steel	anthracite
D064756	galvanised steel	brown
D064757	galvanised steel	red



Proof Loader Kit (EN 795), SpanAnchor (EN 795)

The Proof Loader Kit comprises 2 SpanAnchors and a testing tool that checks the SpanAnchors for their load-bearing capacity to ensure they are installed correctly. The SpanAnchor is a reusable expansion anchor device designed to be used in concrete. However, if the Proof Loader is used as a setting tool, the SpanAnchor can be installed in any suitable substrate. After use, the attachment point can be easily removed from the substrate and is ready for the next application.

Article number	Designation	Colour
D030648	Proof Loader Kit	natural grey
D041862	SpanAnchor	anthracite



Anchoring beam (EN795)

Steel beam for clamping into door / window frames, or similarly into stable masonry. Simple adjustment of the width of the beam. To protect the surfaces, the contact areas are covered with a plastic protector. The opening of the anchor point is approximately 35 mm

- 1 TA125: for 1 person up to 125 cm; for 2 persons up to 80 cm beam width.
- 2 TA110: for 1 person up to 110 cm; for 2 persons up to 90 cm beam width.

Artikel-Nummer	Bezeichnung	Länge [cm]	Gewicht ca. [kg]
D064767	TA125	150	5
D064768	TA110	140	10

ANCHOR DEVICES AND POINTS



Beam hoist (EN795)

Mobile anchor point for securing 1 person to steel beams. Adjustable to various flange widths, with a removable crank handle.

Article number	for flange width [mm]	Weight approx. [kg]
D064763	50 – 220	10,5

Beam clamp Corso (EN795)

Mobile anchor point for securing 1 person to steel beams. Adjustable to various flange widths.

Article number	for flange width [mm]	Weight approx. [kg]
D064762	75 – 235	4,8

Beam clamp (EN795)

Sliding anchor manufactured from aluminium with an anchor point for 1 person. For attaching to or suspending from steel beams. Simple handling thanks to quick and absolutely safe locking mechanism.

Article number	for flange width [mm]	Weight approx. [kg]
D041648	90 – 350	1,7

BMS anchoring sling (EN 795)

The rope-like and compact design makes it easy to mount the karabiners and has a low tare weight in spite of a strength of 70 kN.


Article number	Length [m]
D043112	1,0
D043113	1,5
D043114	2,0

BAS anchoring sling (EN 795)

The SpanSet BAS anchoring sling can be mounted to nearly any structure, e.g. to scaffolding, carriers or beams.

Article number	Length [m]
D005691	0,6
D004584	0,9
D005557	1,2

- Beam hoist
- Beam clamp Corso
- Beam clamp
- BMS anchoring sling
- BAS anchoring sling



ANCHOR DEVICES AND POINTS

- Xtracta
- Xtracta SPXT2
- Xtracta SPXT5
- Xtracta SPXT24



Xtracta

Intelligent solutions for working in confined spaces compliant with EN 795. The SpanSet Xtracta series for safe working and rescue in and from confined spaces comprises a number of intelligent, modular systems and accessories to make these types of work activities easier and, more importantly, safer for you. On this page you will find a selection of core components, presented as systems. Should you require additional products, accessories or information, please do not hesitate to contact us.

Xtracta SPXT2 manhole guard with integrated davit arm

Complete set comprising:

Article number	Designation	Weight [kg]
D057797	Adjustable XTIRPA davit arm 24" including 2 adapter plates	15,0
D057799	XTIRPA portable manhole guard L = 1 x 1 m	13,0
D057800	XTIRPA stabiliser for portable manhole guard SPXTIN2108	2,0

Xtracta SPXT5 modular H-base davit system

Complete set comprising:

Article number	Designation	Weight [kg]
D057797	Adjustable XTIRPA davit arm 24" including 2 adapter plates	15,0
D057802	XTIRPA davit mast 0.9 m for SPXTIN2210	10,0
D059086	XTIRPA H-shaped base unit 1.27 m on wheels	36,8

Xtracta SPXT24 davit arm screw-on floor adapters

Complete set comprising:

Article number	Designation	Weight [kg]
D057802	XTIRPA davit mast 0.9 m for SPXTIN2210	10,0
D057797	Adjustable XTIRPA davit arm 24" including 2 adapter plates	15,0
D059089	Stainless steel floor adapter for SPTXIN2003	10,0



ANCHOR DEVICES AND POINTS

- Accessories for the SpanSet Xtracta series

Accessories for the SpanSet Xtracta series



Article number	Designation
D057855	Carry bag for XTIRPA Manhole Guard SPXTIN2108
D057852	Carry bag for XTIRPA Davit Arm SPXTIN2210
D057853	Carry bag for XTIRPA Davit Mast SPXTIN2003



Article number	Designation
D057865	Bracket for SVLRB 15
D059091	Bracket for winch

HORIZONTAL SAFETY SYSTEMS

- Horizontal safety line „ERGO LINE“




Horizontal safety systems
„ERGO LINE“ for temporary safety lines

The temporary horizontal safety line offers wide freedom of movement while working at height and is designed primarily for one person.


It has to be tensioned between two sufficiently strong anchor points (min. 15 kN = approx. 1.500 kg) and then be further tightened by hand using the tension ratchet until the 250-daN mark is reached on the preinstalled tension

force indicator (TFI). The line is supplied in a practical carry bag with a shoulder strap. The system is available with two different end connectors. The version with a safety swivel hook guarantees an automatic unwinding of the webbing. This precludes incorrect installation of the system.

The HSL horizontal safety lines can also be used to secure two persons at the same time. In this case, the anchor points have to be able to withstand twice the force, i.e. 30 kN (= approx. 3.000 kg).



Because the line droops under load, the **required clearance** below the line has to be large enough to ensure the safety of the users in the event of a fall. (Note instruction manual!).

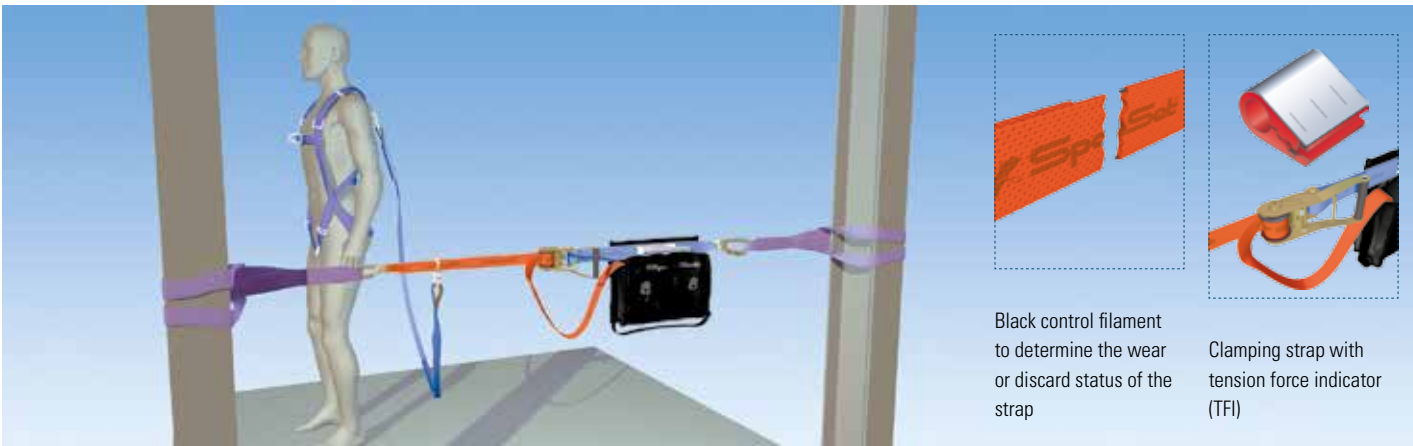

Black control filament to determine the wear or discard status of the strap

Clamping strap with tension force indicator (TFI)



Horizontal safety line „ERGO LINE“ (EN 795)


Temporary horizontal safety line comprising: webbing, orange, with black control filaments to determine the wear or discard status of the strap. Tension ratchet with tension force indicator (TFI) to ensure the necessary tension. Complete system supplied in a practical carry bag with a shoulder strap. Depending on the variant, this system comes with Twistlock karabiners or safety swivel hooks as end connectors.

Article number	Designation	Weight [approx. kg]	Length [m]	End connector
D000186	HSL-DHW	5,2	20	Safety swivel hook
D002869	HSL	5,8	20	Twistlock karabiner



HORIZONTAL SAFETY SYSTEMS

- Tempoline

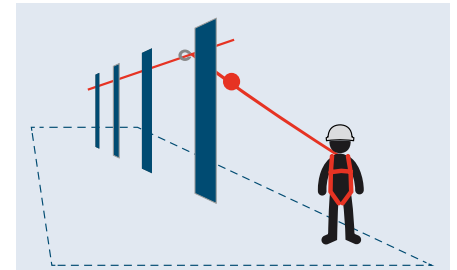

System length min. 8 m

Free space between the anchor points:
min. 2 m / max. 10 m

Temporary horizontal safety line „Tempoline“

Our newly developed temporary horizontal safety line system is designed for use whenever scaffolding cannot be provided or when building can take place without scaffolding. It is EN 795 Class C-certified and can be used to secure three persons at the same time. The system allows the catcher device to slide across the cable guides between two anchor points without having to detach the catcher and unlock the safety mechanism. The fall arrest system is thus ensured at all times. This allows builders, façade erectors, window manufacturers, surveyors etc. to work safely.

The temporary horizontal safety line Tempoline comprises the following elements:

- Wire cable Ø 8 mm galvanised (length on request)
- Ratchet lashing straps with ABS ratchet as a tensioning device
- Tension force indicator
- Deformable cable guides between anchor points
- Ratchet lashing straps as a fixing point of the cable guides
- Catcher shuttle device
- Webbing bracket, anti-slip mats, protective sleeves
- Optional: round slings, hard-wearing shackles

HORIZONTAL SAFETY SYSTEMS

- Safeline



„Safeline“ – The horizontal safety line system. Safe and flexible maintenance, inspections and repairs

The horizontal safety line Safeline comprises a tensioned wire rope to which a catcher shuttle device is attached. The worker is attached to the cable system via the catcher shuttle device. Safeline systems not only protect the worker at height, but also provide the required protection for which every company is responsible.

Important functions

- CE mark pursuant to EN 795, Class B and C
- Suitable for all roof types
- The full load-bearing capacity of the roof can be used, and the system causes no damage to the roof after use
- A computer-based calculation guarantees that all work activities remain within the safe working limits of the installed Safeline systems
- Developed and manufactured in accordance with ISO 9001:2008
- All components are manufactured from grades 304er and 316er stainless steel
- 8 mm stainless steel wire rope
- All parts have serial numbers to ensure traceability
- Comprehensive technical support
- Regular re-testing of installed systems
- Can be installed on inclines of up to 15 degrees
- Supply of matching personal protective equipment
- Furthermore, SpanSet offers corresponding training courses

Advantages

- Unobtrusive, cost-effective solution with low maintenance costs
- Compared to iron metals, stainless steel components exhibit greater durability even under the toughest environmental conditions and harbour a lower risk of spark formation
- Protect users during the construction phase

and also during the performance of routine maintenance tasks following completion

- Fewer movable parts that have to be carried and locked in position during use

Some of the most important application examples for the use of these systems:

To protect the workers during maintenance, cleaning and inspection tasks and during installations.

Ideal for construction, warehousing and distribution, buildings, bridges, infrastructures, cranes, power plants.

For safe access to lighting and sonication bridges, warehouse racks, theatre constructions, production plants, maintenance and loading bays of vehicles, production areas of oil and gas plants.



Tested to EN 795 and with a corresponding CE mark





- HT8

„HT8“ – the evolution of our much tried-and-tested Safeline system.

Time and again there is a need for mounting a permanently installed system above the worker's head. These systems are often very long. In most cases, intermediate brackets within the wire systems are bothersome, as the catcher shuttle device is not able to glide smoothly across these intermediate brackets. Furthermore, these systems are often operated with height safety devices, and to ensure that these are able to glide across the wire precisely and with little friction, the wire system requires a high pre-tension.

This was the starting point for SpanSet's development of a new, unique system, the „HT8“, designed for overhead installations.

The system can be installed up to a maximum wire length of 40 m without intermediate brackets.

A technical highlight of the HT8 is a tensioning device that enables a pre-tension of up to 400 daN to ensure the smallest possible suspension of the wire – especially when height safety devices are employed. Another technical highlight of the HT8 is that the system has been designed for up to four users. This is made possible by the variable use of three separate energy absorbers. Limiting the force to the surrounding components, end forces that have to be reduced into the building, or harnessing values that have to be ensured for the user – all this is made possible by the use of different energy absorbers in the HT8 that limit the force in the endpoints.


An easy replacement of the different absorbers without having to change the length of the wire is yet another technical feature of the HT8.

The flexibility of the HT8 system makes it possible to make use of virtually any structural conditions to guarantee the necessary safety.

Innovation made by SpanSet



HT8 System Komponenten

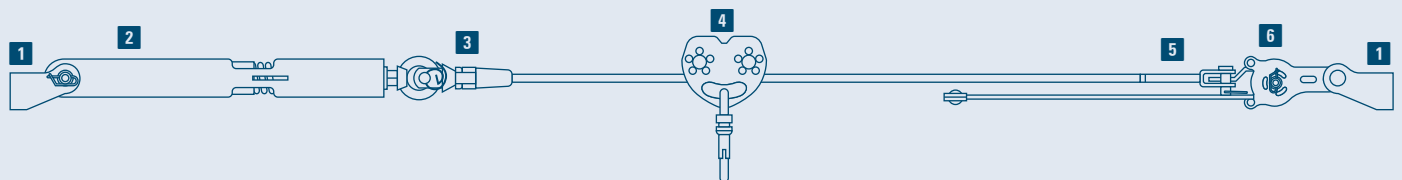

Nr. Beschreibung

1	End anchor bracket
2	Long span tensioner c/w tension indicator
3	8mm 7x7 swageless fork termination
4	Mobile anchor device c/w steel karabiner
5	25m cable c/w swaged fork termination
6	15kN force attenuator

HEIGHT SAFETY DEVICES

- Saverline
- Saverline with rescue lifting device



Fall arrest device „Saverline“ (EN 360)

Safe working in confined spaces! The SpanSet height safety devices provide safety for the user, e. g. in combination with an anchoring device for maintenance and installation activities. The integrated energy absorber brakes and securely holds the user during a fall.



SVLB-2



SVLB-4



SVLB-10/-18



SVLB-30/-40

Article number	Type	Length [m]	Weight [kg]	Load capacity [kg]
D052682	SVLB-2	2	0,7	150
D053427	SVLB-4	4	1,2	136
D052684	SVLB-10	10	4,1	136
D052685	SVLB-18	18	6,5	136
D052686	SVLB-30	30	12,0	136
D052692	SVLB-40	40	12,9	136



Height safety device „Saverline“ with rescue lifting device



SVLRB-15



SVLRB-18/30

Article number	Type	Rope length [m]	Weight [kg]	Load capacity [kg]	Material
D054279	SVLRB-15	15	10,4	150	Metal
D052689	SVLRB-18	18	8,3	136	Plastic
D052691	SVLRB-30	30	15,3	136	Plastic





FALL ARREST ACCESSORIES

- Parking Point fixing point
- Tool lanyard
- MT-3 glove
- Extension strap
- Helmet
- Bags/duffel bags
- Seat board

Parking Point fixing point

This fixing point can be used to hang any unused lanyards back onto the harness. The parking point tears off at a maximum load of 80 kg.



Article number

D022901

Extension Strap

Extension for the rear fall arrest attachment. Makes it easier to latch onto the system when using height safety devices. Must not be used to extend lanyards!



Article number

D038417

Length [m]

0,3

Helmet (EN 397)

This helmet is tested to EN 397 and is available in white. A wide range of accessories (visor, ear protectors, etc.) is also available.



Article number

D059807

Tool Lanyard

This tool holder prevents your tools from falling, thus increasing safety in the workplace. Suitable for tools weighing up to 4.5 kg.



Article number

D053529

Length [m]

0,6

Bags/duffel bags

To stow away your personal protective equipment and additional accessories we offer you a wide range of bags and cases.



1 Bag

2 Backpack



3 Duffel bag

4 Aluminium case

MT-3 glove (EN 397)

The glove is manufactured from synthetic leather and has reinforced fingertips and palms. It has three open fingers to ensure optimal operation of e. g. karabiners. The tight fit ensures maximum flexibility and the adjustable Velcro strap ensures a secure fit.



Article number

D042292

D042293

Size

M

L

Seat board

As an add-on to a harness. The seat board relieves the pressure from the leg loops, makes for easy work and reduces the risk of a suspension trauma.



Recommended accessories:



Art. No.	Designation	Recommended Unit
D041864	Seat board	1
D015606	1 Karabiner ML 2	3
D038975	2 Rigging Plate	1

RESCUE SYSTEMS

- When a rescue situation arises!
- D2 Evacuation and descender device



When a rescue situation arises!

First response rescue

For immediate rescue measures on site. This is an ideal solution for short-term tasks or for companies that need to provide an independent solution for working at height. Requires training of the workers and a commitment from fellow workers.

Emergency response team

Selected personnel trained intensively for the special purposes of immediate on-site rescue measures. Requires a commitment from the persons on site and a constant reassessment in the event of new or changed tasks. While this may be an expensive option, it may, however, be beneficial for larger sites as it allows the team to cover many different work tasks.

Rescue plan

Why SpanSet can help you find a solution.

If your work involves the use of a fall arrest system or workplace positioning techniques, then you must consider the potential rescue implications. Rescue of personnel suspended at height is an issue that concerns every worker, whether they are 2 m or 200 m above ground. Those working in extreme environments traditionally place a great deal of emphasis on this area, and quite rightly so. It also applies to areas that are seemingly harmless, but in these areas it is seldom addressed. Unconsciousness or death can occur in a suspended casualty even though they may not be injured after their initial fall. This is due to a reduced circulation of blood, caused among others by the unusual posture or the pressure points of the harness. If the worker is able to move or relieve the pressure points, the side effects can be dramatically reduced.

Emergency services

Professional personnel with professional equipment for a wide range of situations and constantly updated know-how and do-how. However, this should not be considered a first response solution, since travel and response times apply and the readiness is not in the company's hand. Please note: Professional rescue services are only able to address issues they are aware of and trained to perform. You should not simply rely on them, but instead you should speak to your locally competent emergency services and ask whether they are able to meet your requirements.

1. Casualty

What we know:

- You are suspended from an anchor point.
- You are wearing a full-body harness.
- You are at risk from the effects of being suspended.

However, in the case of unconscious persons, the effects continue unchecked and rescue is the only option. The time it takes for this condition to affect a person can vary greatly, and in any case it is crucial to have an effective solution at hand for a speedy rescue. There are several approaches for the rescue measures: first response rescue, emergency response teams and the emergency services. The rescue equipment can also vary greatly in terms of use, training requirements, aptitude and deployment. To establish the right solution for your application, you must consider all the variables involved, such as the place it is being used, how it is being used, the capability of the users, etc. The GOTCHA™ Rescue Range has been designed to provide simple, pre-assembled solutions for a variety of applications.

- As long as the casualty is still suspended, it is not even possible to provide even basic first aid.

2. Rescuer

What is required:

- You must address your own safety first.
- You must be able to act calmly and effectively.
- You must have regular practical experience in techniques for rescue.
- You should reassure the casualty.

3. Equipment

What is required:

- It must transport the casualty to a point of safety, namely with minimal risk for the casualty or rescuer.
- It must be easy to operate.
- It must be designed and intended for the job it is being asked to perform.

D2 Evacuation and Descender (EN 12841 and NFPA 1983)

The D2 Evacuation and Descender is an innovative „double-stop“ descending device. A new, handle-operated cam system was developed specifically so that the descender fully stops the descent rather than just slowing it down, especially in a panic situation.

The D2 Descender is the only micro-descender in the world to offer this function. The D2 is CE-certified for a maximum descent of 120 m.



Art. no.	Rope length [m]	Pers.
D054277	15	1

RESCUE SYSTEMS



- GOTCHA™ Basic Kit
- GOTCHA Shark™ Kit
- GOTCHA™ CRD Kit

GOTCHA™ Basic Kit (EN 1496) rescue lifting device

The GOTCHA Basic contains a pulley that you can safely attach to any structure with the round sling. The anchor point can thus be placed above, but also below your own position. Do not take a risk: you do not have to climb all the way down to the casualty! Instead, use the light-weight and stable telescopic rod made of carbon fibre. Use the rod to clip the special snap lock („frog”) into a fall arrest attachment of the casualty's harness. This allows you to always carry out the rescue on your own. After that, you can raise or lower the person to a point of safety. You can also rescue persons who are suspended in vertical ladder systems in this way. The GOTCHA system is available with ropes in various lengths that enable an effective descending height of up to 68 m (high anchor point, 200 m rope).



Article number	Rope length [m]
D008533	50
D015602	100

GOTCHA Shark™ Kit (EN 341) rescue descending device

With the GOTCHA Shark you are prepared for even the most difficult of situations. The Shark can be easily attached with the anchoring sling even in very angled buildings. Simply hook yourself into the rope rider and lower yourself to the casualty. The rope rider reliably regulates the descent rate and automatically stops in case of an operating error. This function gives you additional safety during difficult rescue operations. Once you have reached the casualty, you also secure them on the rope rider. After that, you cut through the casualty's attachment with a bladeless rope cutter without any additional risk of injury. This enables a slow and controlled descent.



Article number	Rope length [m]
D016537	66
D025286	100

GOTCHA™ CRD Kit (EN 1496 + EN 341) rescue descending hoist device

The CRD descender has an integrated special gear unit with a hand lever. This can be used to lift an unconscious persons without any additional help, e. g. from the driver's cabin of a crane. When lowering a person, the CRD („Constant Rate Descender") automatically ensures a constant, defined descent rate. Therefore, you can save individual persons from a height of up to 400 m. In the event of an evacuation, the CRD can also be used by multiple persons in quick succession. Because the device is designed to bear a maximum load of 225 kg, up to two persons can be returned to safety at the same time in an emergency.



Article number	Rope length [m]
D013422	100

RESCUE SYSTEM ACCESSORIES

- Suspension loop trauma harnesses
- Suspension relief straps
- Casualty harness
- Rescue cracker
- Rope clamp
- Footloop
- „Buddy“ fall arrester



Trauma harnesses suspension loop & suspension relief straps

To alleviate the effects a suspension trauma, SpanSet offers the suspension loop and the suspension relief straps as a small and handy accessory for the GOTCHA kits. These trauma harnesses are used together with one of the rescue kits. The trauma harnesses can help a suspended person – provided they are conscious – to position themselves inside the loop and thus to delay a suspension trauma.



Article number	Designation
1 D015611	Suspension Loop
2 D037304	Suspension Relief Straps

Casualty harness

Injured persons who are not wearing a harness, because they are e. g. crane operators, have to be rescued from a height. Not a problem with this harness. Regardless of whether the person is conscious or not.



Article number
D041639

Rescue Cracker (EN 1496 + EN 341)

The Cracker is an extremely light-weight, compact conveyor system. The pulley system with a force transmission of 6:1 provides a major mechanical advantage for rescuers who have to carry a casualty's weight. The carry bag in which all parts of the system can be stowed away is easy to transport and deploy. Weighing only 600 g altogether, the system comes with a compact rope clamp which can be used to attach the Cracker to a kernmantle rope.



Article number
D011808

Rope clamp

Rope clamp as an add-on to the GOTCHA rescue kits and for height workers.



Article number
D041638

Footloop

Foot loop as an add-on to the GOTCHA rescue kits and for height workers.



Article number
D041801

„Buddy“ fall arrester

Back-up fall arrester for the GOTCHA VL vertical rope



Article number
D041863

RESCUE SYSTEM ACCESSORIES



- GRABBA Bag
- Safe Lifting Kit
- Spanhoist 12.5

GRABBA Bag

There are many lifting bags available on the market, but the SpanSet GRABBA Lifting Bags are the only ones that are authorised for lifting loads. The GRABBA bags are certified to DIN EN 1492-1. They can be used both as an accessory for your personal protective equipment and as lifting gear. To use the GRABBA bag as lifting gear, simply hang the crane hook into the reinforced lifting slings. To make it easier to attach the bag to your PPE against falls, the loops are fitted with a ring than you can clip onto your harness with a karabiner.



Art. No.	Load capacity [kg]	Storage volume [Litres]
D036487	75	40
D041649	125	60
D036488	250	200

Safe Lifting Kit

The Safe Lifting Kit is a pulley system for lifting minor loads by hand. The system is pre-assembled and marked in accordance with EN 1492; it is thus authorised for lifting procedures. During the annual inspection only one system has to be documented, and not all individuals parts of the system. In accordance with the standard, the system has a maximum load capacity of 150 kg.



Art. no.	Load capacity [kg]	Rope length [m]
D046634	150	25

Spanhoist 12.5

With this personal protective equipment, the user is able to lower himself to the place of operation and back up again. The system can also be operated by a second user, who can lower the worker and then raise him up again. The kit can be attached to multiple anchoring points, such as an extension arm, a tripod or an anchoring sling. To make work more comfortable, the kit should be used with the corresponding CLIMA harness or a work seat.



Recommended accessories:

- Seat board
- Karabiner
- Rigging plate

[See page 39]

Art. no.	Rope length [m]
D033968	50

i HD Tripod

The aluminium HD (heavy-duty) tripod was developed for tough working conditions and for long-term use and is perfectly suitable for industrial applications. Right-angled, fully adjustable legs and a head piece made of one single piece prevent damage. Two integrated guide pulleys and an additional anchor point allow for many different options and combinations for entry, exit and rescue equipment.

For more information see page 28



PPE SETS

- Lifting platform set
- Roofwork set
- Scaffold set
- Special set
- Vertical set
- „SafetySet E“ PPE set



Lifting platform set



Set components	
Harness:	1X standard
Lanyard:	RARL 329
Storage:	Backpack
Article number:	D054973

Scaffold set



Set components	
Harness:	2X standard
Lanyard:	TPDE-G 2024
Extension:	0.5 m rigid
Karabiner:	NZ09
Storage:	Backpack
Article number:	D054975

Vertical set



Set components	
Harness:	2X standard
Lanyard:	Clima VL 20 m
Anchoring sling:	1 m
Storage:	Bag, black
Article number:	D054977

Roofwork set



Set components	
Harness:	2X standard
Lanyard:	Clima VL 10 m
Anchoring sling:	BMS 1 m
Storage:	Backpack
Article number:	D054974

Special set



Set components	
Harness:	Excel 2X
Extension:	Extension strap
Lanyard:	SVLB-4
Anchoring sling:	BMS 1 m
Karabiner:	ML2
Storage:	Backpack
Article number:	D054976

„SafetySet E“ PPE set



Set components	
Harness:	2X standard
Lanyard:	Guided-type fall arrester with energy absorber strap, 10 m polyamide rope
Storage:	Metal case
Article number:	D007209



OTHER PRODUCTS SERVICES

- Inspection service
- Prints/patches

Inspection service

Height safety equipment and products have to be checked on a regular basis, usually annually, in accordance with the Employer's Liability Insurance Association Guidelines BGR 198 and BGR 199 and the Industrial Safety and Health Ordinance (BetrSichV). Defective products have to be repaired professionally or taken out of service. This inspection obligation, by the way, applies for all safety-relevant products, such as flat slings, lashing straps or ladders.

Be on the safe side with the SpanSet inspection service.

We check your personal protective equipment and height safety products for you in the mandatory intervals. In the most comfortable way for you: the inspection service comes to you and performs the inspection on-site, be it of SpanSet products or third-party products. The inspected, intact products are marked and registered, and you will receive an inspection certificate after each check-up.



Prints/patches

We would be pleased to print your company logo on your products. Please ask us about the minimum quantities for the individual products.

- IDXpert®



Efficient inspections, secure administration

ZH 1/709 dictates that height safety products usually have to be inspected once a year.

IDXpert® makes this job easier for you in all phases. The electronic product maintenance and identification system automates all processes involved in the inspection. This saves you time and costs. The combination of a database, reading device and RFID transponders make child's play of administering your PPEaF products. Furthermore, the online platform „IDXpert® Customer Portal“ at www.idxpert.de allows you to securely upload your previously compiled product and inspection data.

Your advantages:

Greater efficiency

You save time and thus costs. After the first initialisation, the inspection of the products and the issuance of inspection certificates are simple. A quantum leap compared to old Excel tables.

More flexibility

Product identification and maintenance are merged into one system. Via the internet you can log into the IDXpert® Customer Portal at all times and access your previously uploaded data. You also have the option of accessing the portal via mobile terminals.

Increased data safety

The comprehensive documentation of inspections, inspectors and products is indispensable for (legal) safety. IDXpert® closes these gaps.

Improved test routine

Stay up-to-date at all times: IDXpert® organises, schedules and documents regular maintenance and servicing intervals for you and shows you at a glance which products are due to be tested.

The components:

The database is the heart of IDXpert®. The design and functions of the user interface are based on current Office applications.

IDXpert® also comes with service functions such as auto-update and online support. An automatic update service is included during the period of the maintenance agreement.

Altogether 32 products are stored in the database, from anchor points and harnesses to karabiners and rescue equipment. This helps you to reliably organise the inspection of your PPE products.

RFID technology („Radio-Frequency IDentification“) allows you to keep electronic records of all products requiring inspections. SpanSet offers a number of transponders for this.

During the initialisation, all product-relevant details are copied from the writing/reading device to the transponder and stored on it – this function is unique on the market.

For all subsequent inspections, the latest inspection results and data are stored or updated on the transponder by means of the writing/reading device and stored in the database. The product and inspection data are thus accessible for every product using the transponder.

The transponder's unique code, just as the printed UID of the new chip generations enable unique identification of the product. In the rare case of a defective transponder you can still clearly attribute the inspection history to each individual product using the UID number and, if necessary, simply replace the transponder.

The **writing/reading device** is used to initialise the transponders and to read and store the product's individual data on the chip and to upload them to the database. During later inspections, only the result of the inspection is updated

on the chip and finally uploaded to the database.

The outdoor smartphone Motorola ES 400 EDA and the reading pen PEN solution form a data transfer unit that enables writing and reading of data. The ES 400 EDA works with IDXpert® Mobil, an application whose user interface is based on the smartphone and its possibilities. Bar codes can be easily captured with the integrated laser scanner. Taking photographs is also possible, e. g. to document products and repairs in the database. The inspection data collected with the reading pen can be transmitted to the terminal via Bluetooth or via a USB connection.



The complimentary **IDXpert® Customer Portal** www.idxpert.de provides you with a database in which you can store your inspection data with all the necessary details online – access-protected and not overwritable.

You can access your data by logging into the portal, e. g. using your smartphone. Here you have the opportunity to look for information about your PPE products at all times and from anywhere, to administer them and to print out certificates if needed.

- IDXpert®



IDXclip

IDXfoil

IDXpin

IDXdome

IDXtriangle



Motorola ES 400

IDXchanger MDE2

IDXchanger USB

IDXchanger MSLB

IDXchanger MSLU

Art. no.	Designation
D053108	IDXclip
D010789	IDXfoil
D043034	IDXpin
D002965	IDXdome
D002966	IDXtriangle
D052788	IDXchanger MDE2
D044059	Motorola ES 400
D044012	IDXchanger MSLB
D052182	IDXchanger MSLU
D047437	IDXchanger USB
D044587*	IDXpert
D044588*	IDXpert Mobil
D044591*	IDXpert portal

i *Licences including maintenance for one year.

Make the easy switch

You can retrofit all of your existing PPE products with transponders. In addition, different transponder types are available for retrofitting height safety devices, tripods and accessories. SpanSet harnesses and lanyards are equipped with a transponder as standard.

Thanks to the unique serial number that is printed on harnesses, lanyards and energy absorbers straight from our manufacture, you can administer your inspection-bound products in the IDXpert® database – even when no transponder was fitted.

Another highlight is the importer, which can be used to easily transfer any existing product and inspection data from old Excel files to the IDXpert® database. An Excel interface also enables the generation of inventory lists and product life cycle analyses.

Training, support & more

With its comprehensive training program, SpanSet provides you with the necessary support to allow you to work with IDXpert® in an efficient and relaxed way.

Our scope of services also includes programming of individual modules. For details about current new features, downloads and additional information about the IDXpert® system please visit: www.idxpert.de



i Simply capture the code with the QR reader using your mobile phone.

www.idxpert.de



Online tools and more

SpanSet microsites

You will find all SpanSet products either in our catalogues or online. For selected products we have created microsites focusing on specific subjects on which you can find all the relevant information, order products directly or book seminars.

www.spanset-nocut.de
www.idxpert.de
www.magnum-x.de
www.supraplus.de
www.spansetsafeline.co.uk
www.spanset-seminare.de


Online tools

Along with the NoCut® product finder you will also find the [online calculator](#) for load control at www.spanset.de. This tool helps you to easily and correctly [calculate the required lashing gear](#) when lashing down loads or the necessary lashing capacity LC for diagonal lashing in accordance with DIN EN 12195-1.



Informative posters

In the „Catalogue“ section on www.spanset.de you will find some interesting posters designed to make your daily work easier. In addition to the poster [Discarding of flat slings and round slings](#) you will also find the [Sharp Edges](#) poster there and the [checklist](#) for using anti-slip matting in load control.

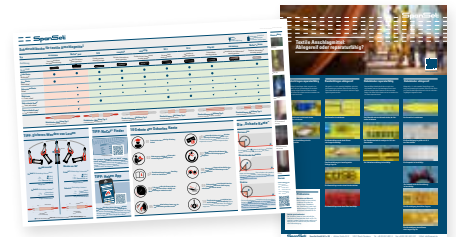

SpanSet apps

Making everyday work easier and safer is our mission – even with the most modern tools. With the SpanSet [lashing calculator](#) you can quickly and easily calculate, for example, how many lashing straps you need to secure your load. The [Inspector app](#) allows you to reliably inspect your PPE and makes sure that you don't forget any important details. The [lifting app](#) determines the required angles and calculates the load capacity of the lifting gear.





The SpanSet blog

The [SpanSet blog](#) provides you with exciting articles about our products. Visit our blog regularly to receive up-to-date information about various issues regarding lifting, load control and height safety. Get informed about new seminars and stay up-to-date on all things SpanSet.



We keep you up-to-date!


Facebook, Twitter and co.

SpanSet is active on several online channels. Get in touch with employees on [Xing](#) or stay in the loop on [Facebook](#) and [Twitter](#).



Informative videos

Why not visit our „[SpanSet Germany](#)“ channel on [YouTube](#)? Here you will find, for example, the current SpanSet company film. Let yourself be convinced by the performance of the Magnum-X round slings on the construction site in Roermond or watch our latest trade fair clip.



AT WORK – SpanSet news

In addition to the trade fair newspaper „[Extrablatt](#)“, our customer and employee newspaper [AT WORK](#) is published twice a year. The newspaper provides the latest news from our product range and allows you to take a look behind the scenes at SpanSet. You can download the current edition of AT WORK at [www.spanset.de](#).



Would you like to receive a printed copy?

Just send an email with your name, address and company to marketing@spanset.de.

How SpanSet makes height safety safer every day.

Our top priority is to save human lives and to protect from injury. Our systems provide this safety in a very special way, because SpanSet has been the global leader in research and development in this field for many decades.

SpanSet – Certified Safety

