


CONTENTS

Roundslings		pg
(E) Econolift roundsling		2
(S) SupraPlus roundsling		2
(MG) Magnum roundsling		2
(MGX) Magnum X roundsling		2
(ST) Steel-Tex entertainment wire rope roundsling		6
(BE) Black roundsling		6
(MR) Multi leg roundsling		6
Protective Sleeves		
(PF) PowerFlex protective sleeving		3
(SC) Secutex protective clip on sleeve		3
(SF-1) Secutex single sided protective sleeve		3
(SF-2) Secutex Double sided protective sleeve		3
(SW) SecuWave protective sleeve		3
Web slings		
(A) Simplex web sling		4
(B) Duplex web sling		4
(C) Endless simplex		4
(D) Endless duplex		4
(PB) PowerStar duplex web sling		4
(P2) PowerFlex duplex web sling		5
(S2) Secutex double sided duplex sling		5
(SX) Secutex single sided duplex web sling		5
(VW) VarioWeb length adjustable web sling		6
Lifting Accessories		
(ASH) Joker Hook		7
XOPS Lifting Points		7
Lifting bag range		7

FEATURES

- **BS EN1492-1 (Web Sling)**
- **BS EN1492-2 (Roundslings)**
- **Working load Limit** (in metric tonnes)
- **Effective Working Length** (in metres)
- **Working Temp -40°c to +100°c**
- **Safety Factor 7:1**
- **Loop reinforcement for lifting slings**  
Extra protection for the section of the lifting sling at greatest risk of chafing
- **Edge reinforcement for lifting slings**  
Minimises wear at the side of webbing sling, thanks to high-tech yarns woven into the material
- **Coating for lifting slings**  
Various coatings protect the lifting accessory against wear, even going so far as to provide protection against sharp edges
- **Ribbed profile of SupraPlus**  
Special fibres woven into the outer sleeve reduce wear
- **Reinforcement with textile filament**  
For protection against tears and wrinkling, for longer service life
- **Compact cross-section**  
Due to improved production process
- **Matching the sleeve and the core**  
Prevents wrinkling and therefore wear of the roundslings
- **Indication of load bearing capacity sewn on**  
Cannot be lost, remains clearly legible even when dirty
- **Indication of load bearing capacity woven into the material**  
Cannot be lost, remains clearly legible even when dirty
- **Modular system**  
Each component of a roundslings suspension gear can be replaced individually in the event of wear or damage
- **Quality label**  
Sewn in so that it cannot be torn out, with protective sleeve
- **Folded label**  
With writing on the inside to protect it against wear and damage
- **RFID transponder**  
For electronic inspection documentation and management of your lifting accessories

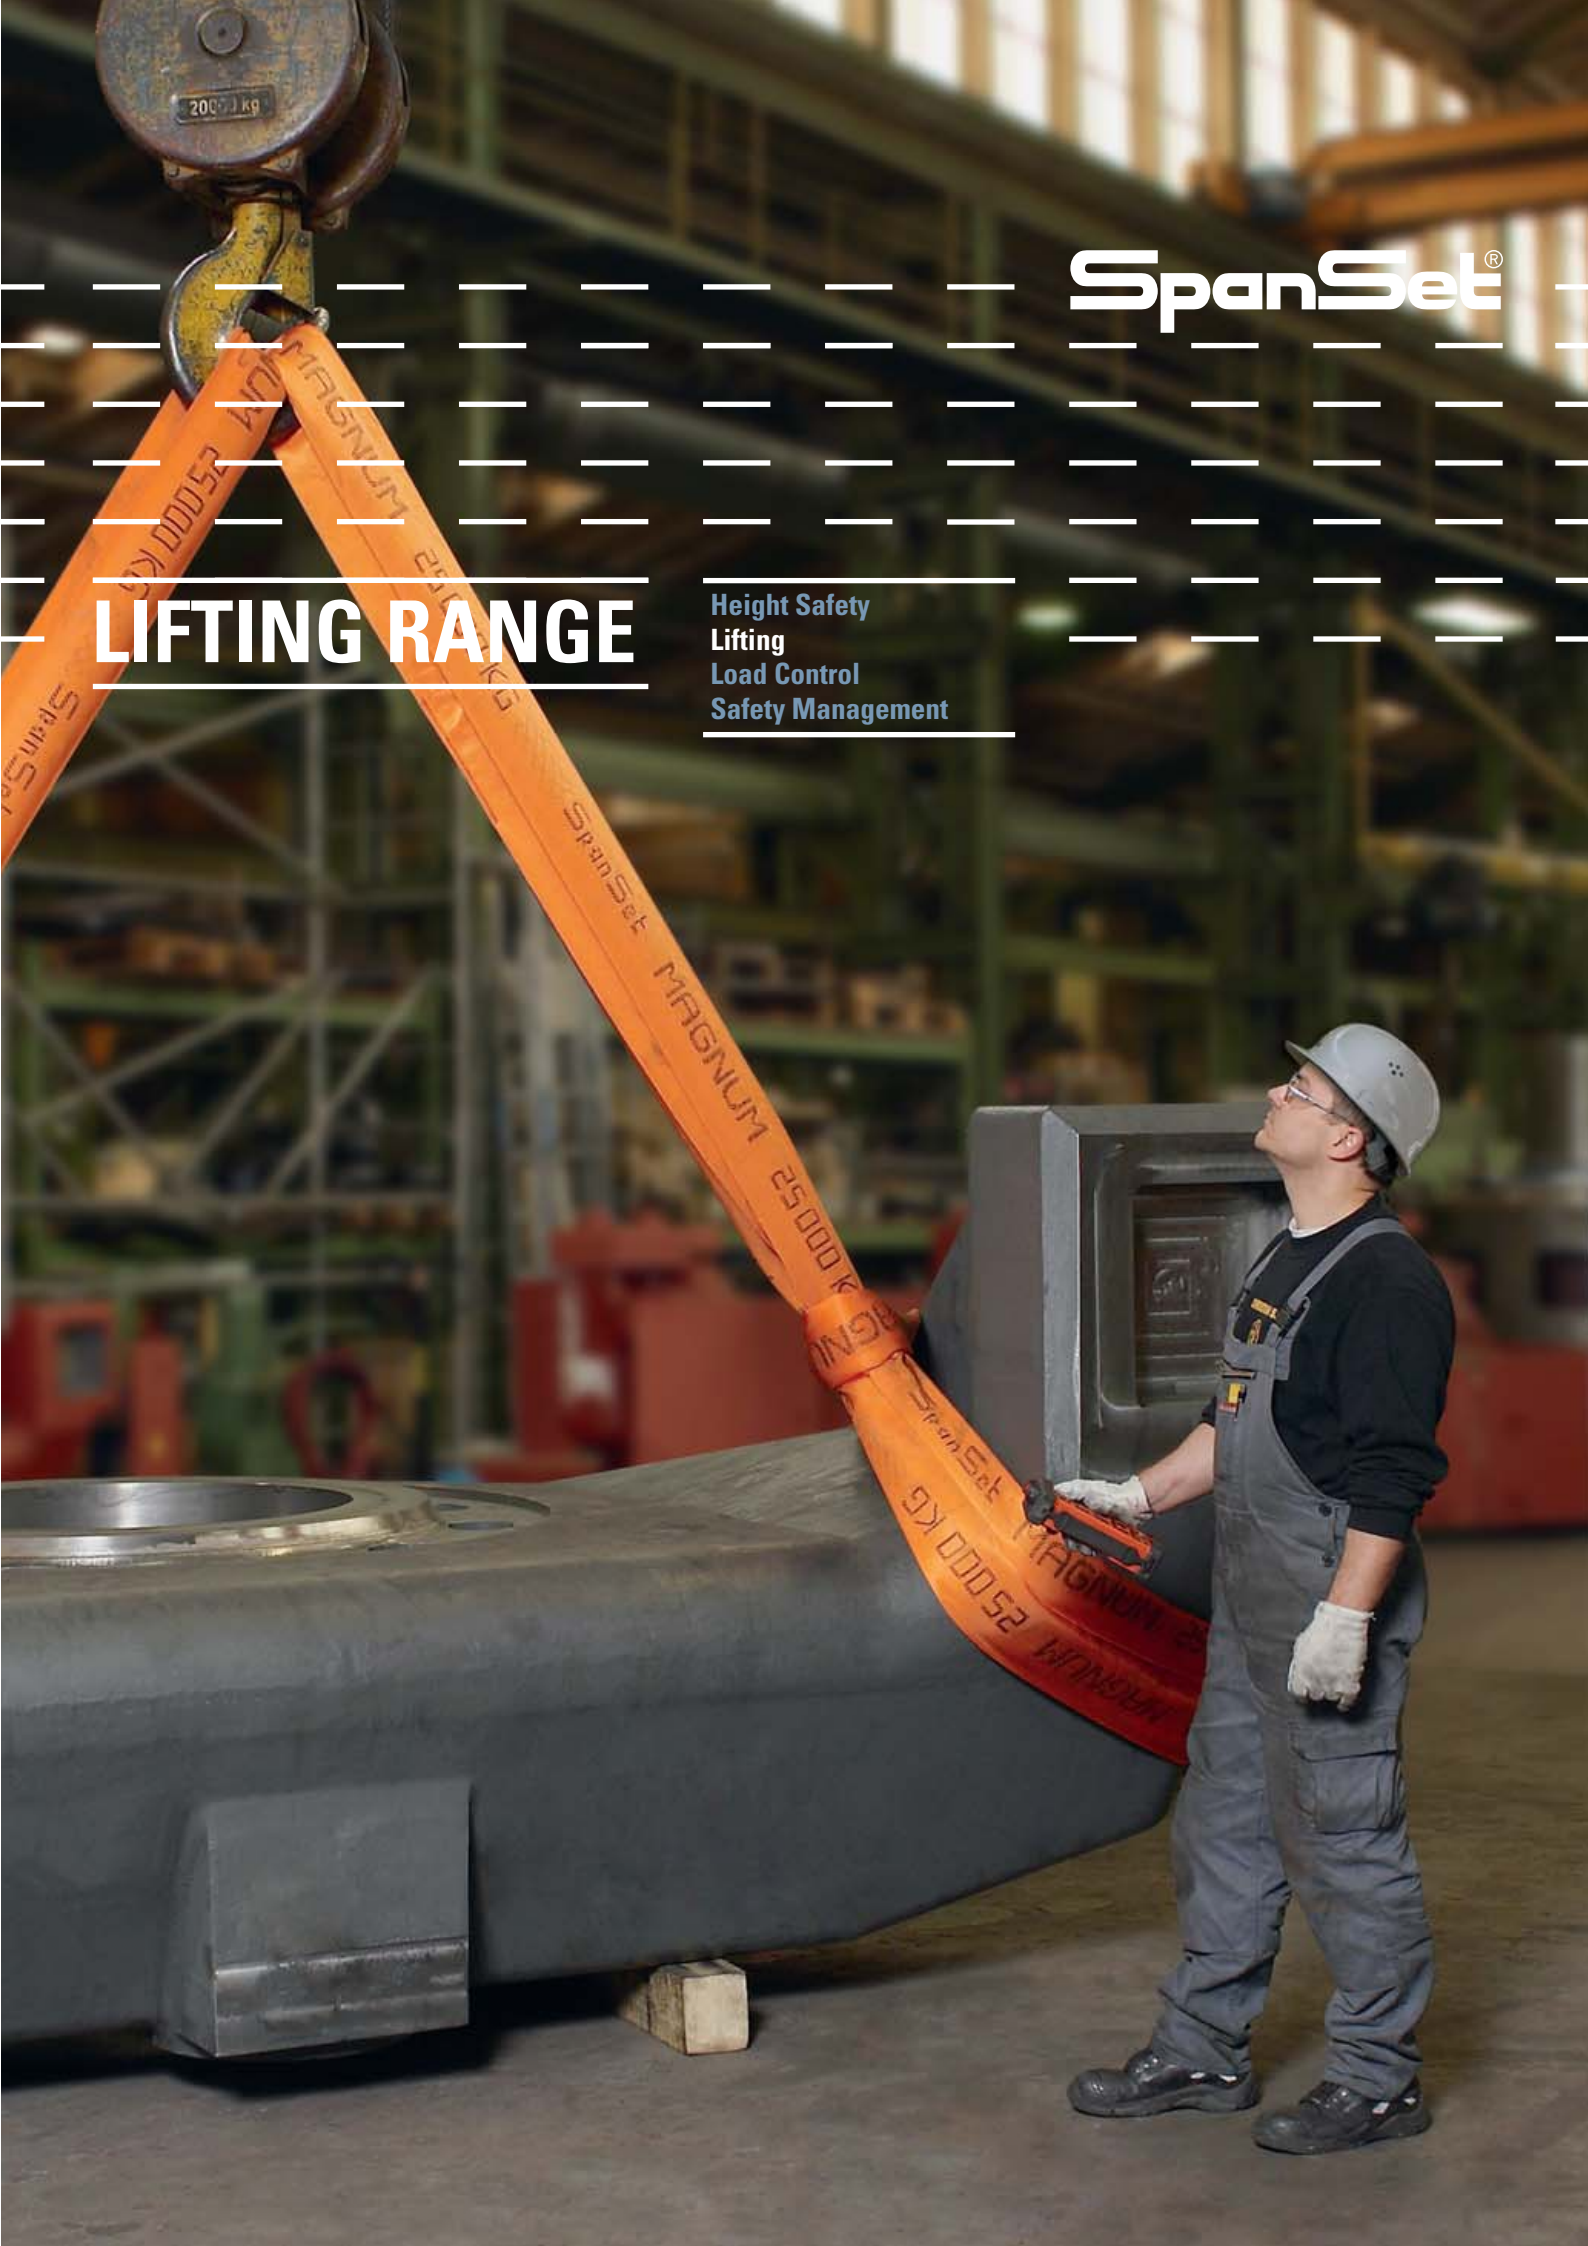

LIFTING RANGE

- Height Safety
- Lifting
- Load Control
- Safety Management



ROUNDSLINGS

ECONOLIFT ROUND SLING (E)




A versatile endless lifting sling for light to medium use applications. Polyester outer sleeving. Simple to choke.

WLL	1t	—	50t
EWL	0.6m	—	8m
as standard			
EN1492-2	+100 -40		


SUPRA PLUS ROUND SLINGS (S)




A durable sling for medium to heavy use.



Up to 25% narrower than standard Round slings and therefore lighter

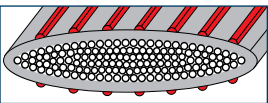

Ridge Reinforcement with UHMPE fibre for longer working life

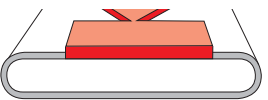


The WLL is always visible

WLL	0.5t	—	8t
EWL	0.6m	—	8m
as standard			



MAGNUM AND MAGNUM PLUS ROUND SLINGS (MG)



The Magnum and Magnum Plus is made from close fitting high performance fibre, with a textile filament woven into the outer sleeve to minimise tearing.


MAGNUM

WLL	10t	—	60t
EWL	4m	—	8m
as standard			



MAGNUM PLUS


WLL	80t	—	100t
EWL	4m	—	8m
as standard			

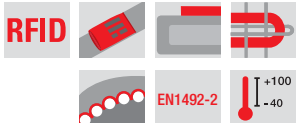

MAGNUM X ROUND SLINGS (MGX)



The next generation of high performance compact roundslings.



Up to 50% more compact than standard round slings



The 45° off set and special UHMPE fibre gives extreme abrasion and cut resistance.




Approximately 50% weight saving over standard roundslings.

WLL	10t	—	400t
EWL	4m	—	8m
as standard			



PowerFlex SLEEVE (PF-1)




FOR EXTRA ABRASION PROTECTION thanks to the PowerFlex coating

For round slings	WLL	0.5t	—	40t
For web slings	WLL	1t	—	20t



SECUTEX SINGLE SIDED PROTECTIVE SLEEVE (SF-1)

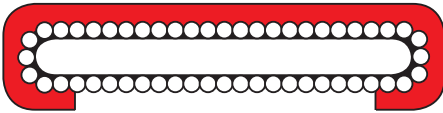


Single sided Secutex® sleeve for anti-cut performance with flexibility

For round slings	WLL	0.5t	—	150t
For web slings	WLL	1t	—	20t



SECUTEX DOUBLE SIDED PROTECTIVE SLEEVE (SF-2)

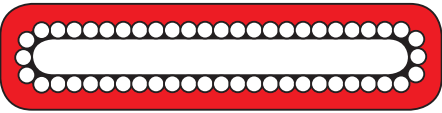


Double sided Secutex® sleeve for extra anti-cut protection on both sides.

For round slings	WLL	0.5t	—	150t
For web slings	WLL	1t	—	20t



SECUTEX PROTECTIVE CLIP ON SLEEVE (SC)

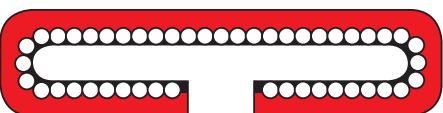

Removable single sided Secutex® Sleeve.

For round slings	WLL	0.5t	—	150t
For web slings	WLL	1t	—	20t




SECUWAVE PROTECTIVE SLEEVE (SW) FOR "RAZOR SHARP" EDGES



For radii less than 2mm. Thanks to the wave design the Razor Sharp edge is enveloped and held in place.

PowerStar	WLL	1t	—	10t
(CS) double duplex	WLL	2t	—	20t


SURFACE REINFORCEMENT (S)

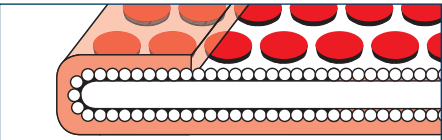

All Secutex Sleeves can have the extra steel protection.



GROUND FINISH (G)

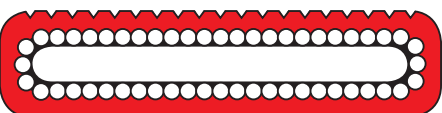

To maintain grip for wet or oily conditions.





WEB SLINGS

SIMPLEX WEB SLING (A)



Single layer flat web sling with reinforced eyes.

WLL	0.5t	—	10t	EN1492-1
EWL	1m	—	8m	as standard
				T +100 -40



ECONOLIFT DUPLEX WEB SLING (B)



Two layer flat web sling with reinforced eyes.

WLL	1t	—	10t	EN1492-1
EWL	1m	—	8m	as standard
				T +100 -40

New 20t, 600mm wide duplex available.



POWERFLEX DUPLEX WEB SLING (P2)



The PowerFlex Sling is an upgrade based on the PowerStar Sling. It has a PowerFlex coating over the the body of the sling to protect against abrasion from surfaces such as concrete. The webbing is sealed against ingress of dirt so that the sling can be easily cleaned down after use.

Eye (EY)	WLL	1t	—	10t
C Hook (CH)	WLL	1t	—	5t
D Link (DL)	WLL	1t	—	10t
as standard	EWL	2m	—	8m
	RFID	T +100 -40	EN1492-1	



ECONOLIFT ENDLESS FLAT WEB SLING (C/D)



Endless flat slings in simplex and duplex.

WLL	1t	—	10t	EN1492-1
EWL	1m	—	8m	as standard
				T +100 -40



CS HEAVYDUTY WEBSLING 4 PLY (CS)




WLL	2t	—	20t	EN1492-1
EWL	1.1m	—	8m	as standard
				T +100 -40

New 40t, 600mm wide available.



SECUFLEX DUPLEX WEB SLING (SX)



For use with sharp edges, the Secuflex Sling combines the tough anti-cut properties of a Secutex coating on the working side with the flexibility of a PowerFlex coating on the reverse side.


Eye (EY)	WLL	1t	—	10t
C Hook (CH)	WLL	1t	—	5t
D Link (DL)	WLL	1t	—	10t
	EWL	2m	—	8m
				as standard




POWERSTAR DUPLEX WEB SLING (PB)



The PowerStar Duplex Sling is the next generation of duplex sling systems, with allround protection for longer life.




The unique PowerStar herringbone weave webbing reduces wear on the surface and is also an easily recognisable capacity indicator. Each 30mm herringbone weave strip indicates a straight lifting capacity of 1t.




The transparent PU coating offers 3 times more protection against abrasion from daily wear and tear.


WLL	1t	—	10t
EWL	2m	—	8m
			as standard




The hard wearing hi-tech black spun yarn, woven into the edges of the slings gives even more protection against chafing and cutting on the edges.



The hi-tech flock fibre eye protection gives an increase in working life by protecting the eyes against damage from the hook.

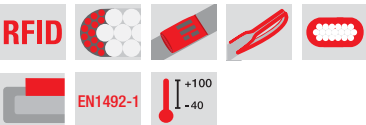

SECUTEX DUPLEX WEB SLING (S2)



The Secutex S2 web sling with full protection for use with sharp edges. The S2 has Secutex coating on both surfaces.

Eye (EY)	WLL	1t	—	10t
C Hook (CH)	WLL	1t	—	5t
D Link (DL)	WLL	1t	—	10t
	EWL	2m	—	8m
				as standard





LIFTING ACCESSORIES

MULTI LEG ROUNDSLING (MR)



Single leg and multi-leg roundslings available with a range of masterlinks and end fittings.

1 Leg (MR1)

WLL1t

EWL0.5m

30t

50m

as standard

2 Leg (MR2)

WLL1.4t

EWL0.5m

42t

50m

as standard

3 or 4 Leg (MR3, MR4)

WLL2.1t

EWL0.5m

63t

50m


as standard

Also available as webslings

VARIO WEB (VW)



A single or multi-leg websling which allows exact adjustment on each leg for precise lifting.

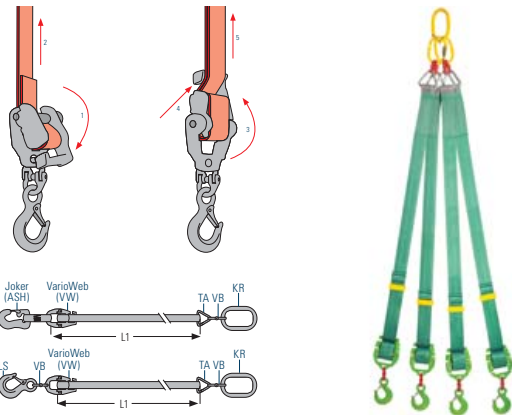

Available with Joker hooks or sling hooks.

1 Leg

WLL1t

EWL2m

2t

8m

as standard

2 Leg

WLL1.4t

EWL2m

2.8t

8m

as standard

3 or 4 Leg

WLL2.1t

EWL2m

4.2t

8m

as standard

STEEL-TEX STAGE SLING (ST)



Temperature resistant wire roundslings

WLL2.4t

EWL0.9m

1.8m

2.7m

as standard

Inspection window incorporated

Rated up to 200°C

ENTERTAINMENT SLING (BLACK RANGE) ROUND SLING (BE)



Black sleeved roundslings for entertainment rigging.

WLL2t

EWL0.5m

8m

as standard

EN1492-2

Rated up to 200°C

RFID

SUPRA PLUS

SPECIALISED SOLUTIONS

JOKER HOOK (ASH)



Use a Joker hook for connecting your roundslings or webslings directly to the lifting point in seconds without the use of tools. Colour coded simple sling extension.

WLL1t

10t



XOPS LIFTING POINTS (XOPS)

SpanSet Exoset lifting points are made with grade 100 alloy with 360° rotation and can pivot through 180°. The marked WLL can be used at any permissible angle (at least 2.5 x greater WLL than B.S.4278 eye bolts).



XOPS/R RING

WLL0.4t

12t

THREADM8

M48

Rated up to 200°C



XOPS/TR SWIVEL

WLL0.45t

15t

THREADM10

M56

Rated up to 200°C



XOPS/TBR POINT

WLL0.3t

20t

THREADM8

M48

Rated up to 200°C

Longer thread length available.

GRABBA LIFTING BAG RANGE (LB)



- Designed and built to EN1492.1 lifting standards
- Each complete with unique serial number
- Can be stacked two high for lifting or lowering
- Optional tough plastic base

WLL75KG

250KG

EN1492-1

Rated up to 200°C

SF 7:1

	SWL Kg	Capacity Ltr	Height mm	Diameter mm	Width
small	75	40	320	400	N/A
medium	125	63	500	400	N/A
large	250	201	400	800	N/A
flat panel	250	600	1000	N/A	2400

---

SpanSet Ltd.  
Telford Way, Middlewich  
Cheshire CW10 0HX, UK  
Tel: +44 (0) 1606 737494  
Fax: +44 (0) 1606 737502  
[www.spanset.co.uk](http://www.spanset.co.uk)

---

---

SPANSET OFFERS BESPOKE DESIGNS,  
MANUFACTURING, TESTING  
AND CERTIFICATION

---



HEIGHT SAFETY



LIFTING



LOAD CONTROL

---

**Approved dealer**