



**SpanSet Australia Ltd**

150 Old Bathurst Road  
Emu Plains  
NSW 2750  
Australia

**Telephone**

+61 2 4735 3955

**Fax**

+61 2 4735 3630

**Email**

[sales@spanset.com.au](mailto:sales@spanset.com.au)

**Internet**

[www.spanset.com.au](http://www.spanset.com.au)

# Gotcha™ TRK Tower Rescue Kit

The Gotcha™ TRK is a pre-assembled 100m kit that can be used for rescuing personnel from towers, masts and similar structures.

The kit includes enough components for a variety of rescue applications. This kit is commonly used by operators in the telecommunications and electrical industries.

## Kit Contains

- 100m of Australian Standards rescue rope
- Double brake descender
- Micro hauler
- 2 x Black snake attachment slings
- 4 x K4 Karabiners
- 3 x RP012 Single pulleys
- Single Yoke
- Dual Yoke H1ALU
- Back pack lay flat gear bag

## Gotcha™ Kit Contents

### Australian Standards Rescue Rope

RC11 AS x 100m



- 11mm rope diameter
- Abseiling braid for static life rescue lines
- Teflon coated internal fibres
- AS4142-3 - 1993 compliant

### Micro Hauler



- Supplementary pulley system hauler for raising or lowering a casualty in a rescue
- Suitable for use on 10mm-11mm static kermantle synthetic rope
- 10.2kN minimum proof force
- 1037kg breaking limit
- 150kg maximum load on rope clamp
- Designed for single person use
- System contains:
  - 39g Tibloc made of chrome-plated steel for use on single rope with a locking karabiner having a 10 to 12 mm round or oval cross section
  - 11mm Australian Standards kermantle rope
  - 2 x D karabiners
  - 1 x top pulley
  - 1 x bottom pulley
  - Polyester storage bag


### Double Brake Descender



- Double stop device with autolock function
- Brake will only lock when the user is in freefall
- Double safety locking mechanism
- Push button 'click-lock' safety closure
- Cam provides some shock absorption
- 4kN maximum capacity static load
- 4-6kN maximum slip load
- Maximum load 340kg
- Aluminium construction with stainless steel cam
- Corrosion resistant

### Black Snake Attachments

x 2

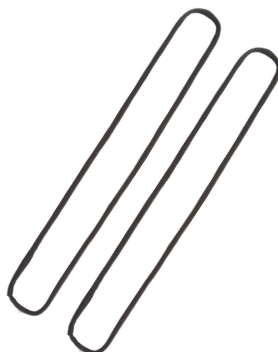

- Continuous roundsling
- Polyester webbing construction
- Direct, choke or basket orientation
- 70kN direct load rating

---

#### 4 Karabiners

Code: K4



- D karabiner
- Triple action
- 24mm gate opening
- 30kN strength
- 1kN gate strength
- Weighs 183g
- Alloy steel construction

---

#### 3 Single Pulleys

Code: RP012



- Compatible with up to 13mm rope diameter
- 35kN minimum breaking strain
- High strength aluminium construction
- Anodised finish
- 88g weight

---

#### 1 Single Yoke

Code: Single Yoke



- Single yoke gives the rescuer a rated single secure point of attachment to a suspended casualty in a rope rescue techniques
- The yoke can be attached to the karabiner of the descender before descending to the casualty to allow fast and secure connection to make the casualty safe
- 15kN maximum load capacity (one person)
- High tenacity polyester webbing construction
- Aluminium attachment ring
- K10 triple action karabiner

---

#### 1 Dual Yoke

Code: Dual Yoke H1ALU



- Dual yoke has been designed to be used in conjunction with the SpanSet 1600 tower harness range and our 1600 wind turbine harnesses. It allows the user to connect the dual legs to the ancillary side D rings to put the user in a seated position when performing vertical descent or emergency evacuation techniques to reduce the effect of suspension harness syndrome. This seated position also allows the operator to push off structures during obstacle negotiations in an emergency rope rescue or evacuation activity
- The dual yoke allows the descender to sit closer the operator which affords easier operations
- 15kN maximum load capacity (one person)
- High tenacity polyester webbing construction
- Aluminium attachment ring
- 2 x H1 aluminium double action safety hooks

---

#### Lay Flat Gear Organiser Bag



- PVC fold up kit bag with top flap
- Back pack carry style

## Training Courses

### Height Safety

Working Safely at Height  
Working Safely at Heights Refresher  
Height Safety Supervisor\*  
Height Safety Manager\*

### Rescue

Rescue Systems Operator\*  
Vertical Rescue\*  
Tower and Pole Rescue\*  
Wind Access Rescue Technician\*  
EWP Emergency Escape  
Gotcha Rescue

### Confined Space

Confined Space\*  
Confined Space - Refresher\*  
Breathing Apparatus\*  
Confined Space Non-Entry Rescue\*

### Inspection

Competent Person Practical  
Inspection and Record Keeping\*



## SpanSet Accreditations

ISO 9001:2008 Certified Quality  
Management System

ISO 14001:2004 Certified Environment  
Management System

OHSAS 18001:2007 Certified Occupational  
Health and Safety Management Systems

Australian/New Zealand Standard  
4801:2001 certified Occupational Health  
and Safety Management Systems

5 Tick Certified Product

Accredited Laboratory Tested by NATA to  
ISO/IEC 17025

ASQA Registered Training Organisation  
certified to ISO 9001:2008

Certified manufacturer to AS/NZS 1891.1  
"Industrial Fall Arrest Systems and Devices"

Certified manufacturer to AS/NZS 1353.1  
"Flat Synthetic Webbing Slings"

Certified manufacturer to AS/NZS 4497.1  
"Round Slings—Synthetic Fibre"



[www.spanset.com.au](http://www.spanset.com.au)



Environment  
ISO 14001:2004  
Lic:  
CEM21958



Health & Safety  
AS4801:2001  
Lic:  
OHS21464



Quality  
ISO 9001:2008



Health & Safety  
OHSAS 18001:2007  
Lic:  
OHS21464



Australian  
Standard

