


610mm Reach - Fixed Base Davit Kit

Easy and safe access into confined spaces this davit is easily positioned from 385mm, 450mm and 601mm

Item Name short	Arm Reach [mm]	Davit arm	Load Capacity (kg) [kg]	Mast	Base	Working angle [°]	Height [mm]
XT-24-IN-2005	381 - 610	XT-IN-2210	164	XT-IN-2003	XT-IN-2005	90	1993 - 2413

Item Name short	Safety Factor	Fixing material	Main Material	Packaging Unit (PU) Content	Colour
XT-24-IN-2005	10:1	Concrete and Steel Floor	Aluminium	1	Yellow

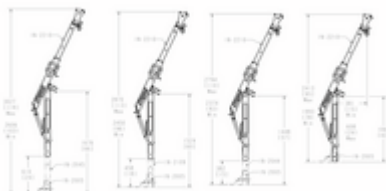

ORDER NUMBERS[Global Item Number/Local ERP Number SSAU]

Base XT-24-IN-2005



2010112
XT24

Standards

EN 795: 2012 AS/NZS 5532

Davit arm

Xtirpa 610mm Davit Arm

SpanSet Australia Ltd
150 Old Bathurst Road
Emu Plains NSW 2750
Australia
+61 (02) 4735 3955
sales@spanset.com.au
www.spanset.com.au



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Australia Ltd

**SpanSet
Certified
Safety**

■ Mast	Xtirpa 610mm Mast
■ Base	Xtirpa 600 S/S Floor Mount
■ Main Material	Aluminium
■ Colour	Yellow
■ Arm Reach	381 - 610 mm
■ Working angle	90 °
■ Height	1'993 - 2'413 mm
■ Load Capacity (kg)	164 kg
■ Fixing material	Concrete and Steel Floor
■ Packaging Unit (PU) Content	1

