


Anneau VLBS escamotable à souder

La solution de soudure compacte

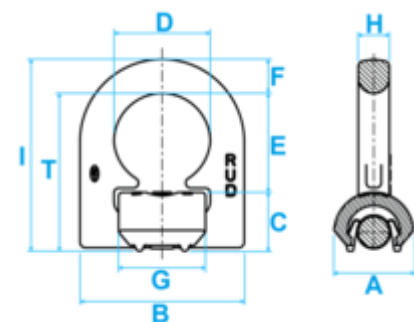

Nom court de l'article	WLL kg Angle 0° [kg]	WLL t angle 0° [t]	WLL kg Angle 90° [kg]	WLL t angle 90° [t]	A [mm]	B [mm]	C [mm]
VLBS 1.5	1500	1.5	1500	1.5	33	66	25
VLBS 2.5	2500	2.5	2500	2.5	36	77	27
VLBS 4	4000	4	4000	4	42	87	31
VLBS 6.7	6700	6.7	6700	6.7	61	115	44
VLBS 10	10000	10	10000	10	75	129	55
VLBS 16 OF	16000	16	16000	16	96	190	69

Nom court de l'article	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	T [mm]
VLBS 1.5	38	40	14	33	14	79	65
VLBS 2.5	45	48	16	40	14	91	75
VLBS 4	51	52	18	46	16	101	83
VLBS 6.7	67	73	24	60	22	141	117
VLBS 10	67	71	26.5	60	26	152.5	126
VLBS 16 OF	100	105	40	90	26	214	174

Nom court de l'article	Poids net [kg]
VLBS 1.5	0.35
VLBS 2.5	0.48
VLBS 4	0.76
VLBS 6.7	1.9
VLBS 10	2.9
VLBS 16 OF	6.8



NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSCH]

WLL kg Angle 0°	VLBS 1.5	VLBS 2.5	VLBS 4	VLBS 6.7	VLBS 10	VLBS 16 OF
1500 kg	2009235 VLBS1,5	-	-	-	-	-
2500 kg	-	2009253 VLBS2,5	-	-	-	-
4000 kg	-	-	2009254 VLBS4	-	-	-
6700 kg	-	-	-	2009255 VLBS6,7	-	-
10000 kg	-	-	-	-	2009256 VLBS10	-
16000 kg	-	-	-	-	-	2009257 VLBS16

■ Normes	EN 1677-1 ISO 12100
■ Matériel principal	Acier
■ Couleur	Rose
■ Plage de température	-20° C to + 200° C
■ Contenu des unités d'emballage (UE)	1

