


Boucles de levage pour levage

De machine et plaque de béton préfabriquée

Nom court de l'article	WLL [kg]	WLL [t]	WLL t angle 0° [t]	WLL kg Angle 0°-45° [kg]	G [mm]	L [mm]	Poids net [kg]
GOS12	500	0.5	0.5	500	12	335	0.3
GOS14	800	0.8	0.8	800	14	335	0.4
GOS16	1200	1.2	1.2	1200	16	385	0.5
GOS18	1600	1.6	1.6	1600	18	470	1.2
GOS20	2000	2	2	2000	20	470	0.5
GOS30	4000	4	4	4000	30	590	0.7
GOS36	6300	6.3	6.3	6300	36	780	7.7
GOS42	8000	8	8	8000	42	860	9
GOS52	12500	12.5	12.5	12500	52	1080	15.2

Nom court de l'article	Couleur
GOS12	Orange
GOS14	Blanc
GOS16	Rouge
GOS18	Rose
GOS20	Vert clair
GOS30	Olive
GOS36	Bleu
GOS42	Gris
GOS52	Jaune



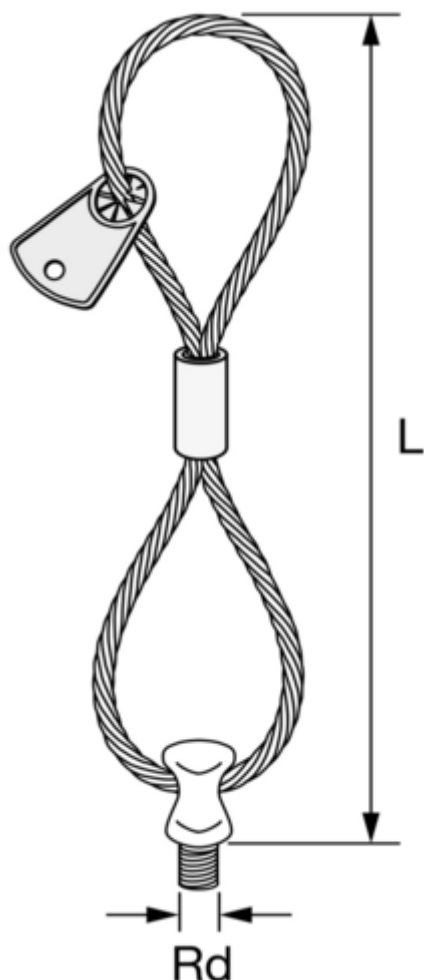

NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSCH]

Dimension G	GOS12	GOS14	GOS16	GOS18	GOS20	GOS30	GOS36	GOS42	GOS52
12 mm	2020136 GOS12	-	-	-	-	-	-	-	-
14 mm	-	2020137 GOS14	-	-	-	-	-	-	-
16 mm	-	-	2020138 GOS16	-	-	-	-	-	-
18 mm	-	-	-	2020139 GOS18	-	-	-	-	-
20 mm	-	-	-	-	2020140 GOS20	-	-	-	-
30 mm	-	-	-	-	-	2020142 GOS30	-	-	-
36 mm	-	-	-	-	-	-	2020143 GOS36	-	-
42 mm	-	-	-	-	-	-	-	2020144 GOS42	-
52 mm	-	-	-	-	-	-	-	-	2020145 GOS52

- Matériel principal Acier
- Contenu des unités d'emballage (UE) 1

