


Bow Shackle with Screw Pin

Screw pin for quick (dis)assembly



Item Name short	WLL kg [kg]	WLL t [t]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
G4-1-003	330	0.33	22	6	5	8	10
G4-1-005	500	0.5	28.5	8	6	10	13
G4-1-007	750	0.75	31	10	8	10.5	14
G4-1-010	1000	1	37	11	10	13	17
G4-1-015	1500	1.5	43	13	11	14.5	18
G4-1-020	2000	2	48	16	13	16.5	21
G4-1-032	3250	3.25	60	19	16	21.5	27
G4-1-047	4750	4.75	71	22	19	25.5	32
G4-1-065	6500	6.5	84	25	22	29	37
G4-1-085	8500	8.5	95	28	25	34	43
G4-1-095	9500	9.5	108	32	30	37	46
G4-1-120	12000	12	119	35	32	41	51
G4-1-135	13500	13.5	132	38	35	45	57
G4-1-170	17000	17	146	40	40	49	60
G4-1-250	25000	25	178	45	45	63.5	73
G4-1-350	35000	35	197	50	50	73	83
G4-1-550	55000	55	230	65	65	90	105

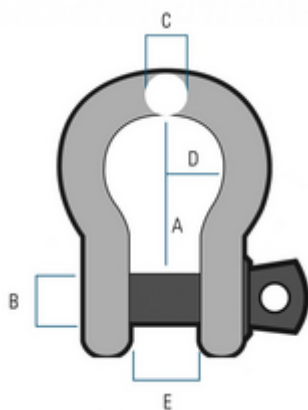

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

WLL t	G4-1-003	G4-1-005	G4-1-007	G4-1-010	G4-1-015	G4-1-020	G4-1-032	G4-1-047	G4-1-065	G4-1-085	G4-1-095
0.33 t	2025776	-	-	-	-	-	-	-	-	-	-
0.5 t	-	2025777	-	-	-	-	-	-	-	-	-
0.75 t	-	-	2025778	-	-	-	-	-	-	-	-
1 t	-	-	-	2025785	-	-	-	-	-	-	-
1.5 t	-	-	-	-	2025786	-	-	-	-	-	-
2 t	-	-	-	-	-	2025787	-	-	-	-	-
3.25 t	-	-	-	-	-	-	2025788	-	-	-	-
4.75 t	-	-	-	-	-	-	-	2025789	-	-	-
6.5 t	-	-	-	-	-	-	-	-	2025790	-	-
8.5 t	-	-	-	-	-	-	-	-	-	2025791	-
9.5 t	-	-	-	-	-	-	-	-	-	-	2025792
12 t	-	-	-	-	-	-	-	-	-	-	-
13.5 t	-	-	-	-	-	-	-	-	-	-	-
17 t	-	-	-	-	-	-	-	-	-	-	-
25 t	-	-	-	-	-	-	-	-	-	-	-
35 t	-	-	-	-	-	-	-	-	-	-	-
55 t	-	-	-	-	-	-	-	-	-	-	-

WLL t	G4-1-120	G4-1-135	G4-1-170	G4-1-250	G4-1-350	G4-1-550
0.33 t	-	-	-	-	-	-
0.5 t	-	-	-	-	-	-
0.75 t	-	-	-	-	-	-
1 t	-	-	-	-	-	-
1.5 t	-	-	-	-	-	-
2 t	-	-	-	-	-	-
3.25 t	-	-	-	-	-	-
4.75 t	-	-	-	-	-	-
6.5 t	-	-	-	-	-	-
8.5 t	-	-	-	-	-	-
9.5 t	-	-	-	-	-	-
12 t	2025793	-	-	-	-	-
13.5 t	-	2025794	-	-	-	-
17 t	-	-	2025795	-	-	-



WLL t	G4-1-120	G4-1-135	G4-1-170	G4-1-250	G4-1-350	G4-1-550
25 t	-	-	-	2025796	-	-
35 t	-	-	-	-	2025797	-
55 t	-	-	-	-	-	2025798

■ Norms	EN 13889
■ Main Material	Steel
■ Colour	Grey
■ Temperature Range	-20 °C to + 200 °C
■ Packaging Unit (PU) Content	1

