


Crochet de sécurité EXOSET®

Crochet de sécurité avec oeillet à verrouillage automatique sous charge



Nom court de l'article	WLL [kg]	Diamètre de la chaîne	WLL [t]	A [mm]	B [mm]	D [mm]	I [mm]
ESLH-6-10	1400	6 mm	1.4	108	70	20	21
ESLH-8-10	2500	8 mm	2.5	135	90	26	27
ESLH-10-10	4000	10 mm	4	165	108	30	34.5
ESLH-13-10	6700	13 mm	6.7	205	138.5	40.5	40
ESLH-16-10	10000	16 mm	10	255	170.5	50.5	50

Nom court de l'article	K [mm]	L [mm]	O [mm]	Poids net [kg]
ESLH-6-10	43	141	28	0.5
ESLH-8-10	51	175	35.5	0.9
ESLH-10-10	64.3	212.5	45	1.5
ESLH-13-10	80	270	53.5	2.7
ESLH-16-10	104	331	62	5.7

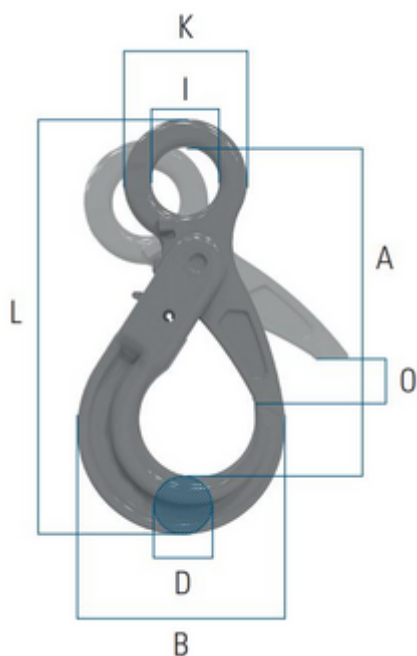

NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSCH]

Diamètre de la chaîne	ESLH-6-10	ESLH-8-10	ESLH-10-10	ESLH-13-10	ESLH-16-10
6 mm	2018566 ESLH-6-10	-	-	-	-
8 mm	-	2018567 ESLH-8-10	-	-	-
10 mm	-	-	2018568 ESLH-10-10	-	-
13 mm	-	-	-	2018569 ESLH-13-10	-
16 mm	-	-	-	-	2018570 ESLH-16-10

■ Normes	EN 1677
■ Classe	100
■ Matériel principal	Acier
■ Couleur	Bleu
■ Plage de température	-40°C / 200°C
■ Plage de température	-40°F / 120°F
■ Contenu des unités d'emballage (UE)	1

