


D-Shackle with Screw Pin

Enables quick (dis)assembly which makes the shackle perfect for rigging activities



Item Name short	WLL kg [kg]	WLL t [t]	A [mm]	B [mm]	C [mm]	E [mm]
G4-2-005	500	0.5	22	8	6	13
G4-2-007	750	0.75	26	10	8	14
G4-2-010	1000	1	32	11	10	17
G4-2-015	1500	1.5	36.5	13	11	18
G4-2-020	2000	2	51	19	16	27
G4-2-032	3250	3.25	51	19	16	27
G4-2-047	4750	4.75	60.5	22	19	32
G4-2-065	6500	6.5	71.5	25	22	37
G4-2-085	8500	8.5	81	28	25	43
G4-2-095	9500	9.5	90	32	28	46
G4-2-120	12000	12	100	35	32	51
G4-2-135	13500	13.5	111	38	35	57
G4-2-170	17000	17	122	41	38	60
G4-2-250	25000	25	146	50	45	73
G4-2-350	35000	35	172	57	50	83
G4-2-550	55000	55	203	70	65	105

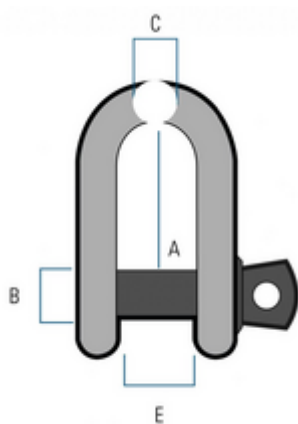

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

WLL t	G4-2-005	G4-2-007	G4-2-010	G4-2-015	G4-2-020	G4-2-032	G4-2-047	G4-2-065	G4-2-085	G4-2-095	G4-2-120
0.5 t	2025800	-	-	-	-	-	-	-	-	-	-
0.75 t	-	2025801	-	-	-	-	-	-	-	-	-
1 t	-	-	2025802	-	-	-	-	-	-	-	-
1.5 t	-	-	-	2025803	-	-	-	-	-	-	-
2 t	-	-	-	-	2025804	-	-	-	-	-	-
3.25 t	-	-	-	-	-	2025805	-	-	-	-	-
4.75 t	-	-	-	-	-	-	2025806	-	-	-	-
6.5 t	-	-	-	-	-	-	-	2025807	-	-	-
8.5 t	-	-	-	-	-	-	-	-	2025808	-	-
9.5 t	-	-	-	-	-	-	-	-	-	2025809	-
12 t	-	-	-	-	-	-	-	-	-	-	2025810
13.5 t	-	-	-	-	-	-	-	-	-	-	-
17 t	-	-	-	-	-	-	-	-	-	-	-
25 t	-	-	-	-	-	-	-	-	-	-	-
35 t	-	-	-	-	-	-	-	-	-	-	-
55 t	-	-	-	-	-	-	-	-	-	-	-

WLL t	G4-2-135	G4-2-170	G4-2-250	G4-2-350	G4-2-550
0.5 t	-	-	-	-	-
0.75 t	-	-	-	-	-
1 t	-	-	-	-	-
1.5 t	-	-	-	-	-
2 t	-	-	-	-	-
3.25 t	-	-	-	-	-
4.75 t	-	-	-	-	-
6.5 t	-	-	-	-	-
8.5 t	-	-	-	-	-
9.5 t	-	-	-	-	-
12 t	-	-	-	-	-
13.5 t	2025811	-	-	-	-
17 t	-	2025812	-	-	-
25 t	-	-	2025813	-	-
35 t	-	-	-	2025814	-



WLL t	G4-2-135	G4-2-170	G4-2-250	G4-2-350	G4-2-550
55 t	-	-	-	-	2025815

- Norms EN 13889
- Main Material Steel
- Colour Grey
- Temperature Range -20 °C to + 200 °C
- Packaging Unit (PU) Content 1

