


Demi-maille d'accouplement ronde

Demi-maille d'accouplement ronde

Nom court de l'article	WLL [kg]	Diamètre de la chaîne	WLL [t]	A [mm]	B [mm]	E [mm]	G [mm]
SKT-7/8-8 G80 2t	2000	8 mm	2	11	18	22	9
SKT-10-8 G80 3.2t	3200	10 mm	3.2	13	25	26	12
SKT-13-8 G80 5.3t	5300	13 mm	5.3	16	29	33	15
SKT-16-8 G80 8t	8000	16 mm	8	20	36	40	19
SKT-18/20-8 G80 12.5t	12500	18/20 mm	12.5	23	43	48	22
SKT-22-8 G80 15.5t	15500	22 mm	15.5	26	50	59	24
SKT-26-8 G80 21.6t	21600	26 mm	21.6	33	58	61	29

Nom court de l'article	L [mm]	Poids net [kg]
SKT-7/8-8 G80 2t	28	0.09
SKT-10-8 G80 3.2t	34	0.18
SKT-13-8 G80 5.3t	44	0.39
SKT-16-8 G80 8t	52	0.65
SKT-18/20-8 G80 12.5t	63	1.1
SKT-22-8 G80 15.5t	75	1.7
SKT-26-8 G80 21.6t	80	2.6

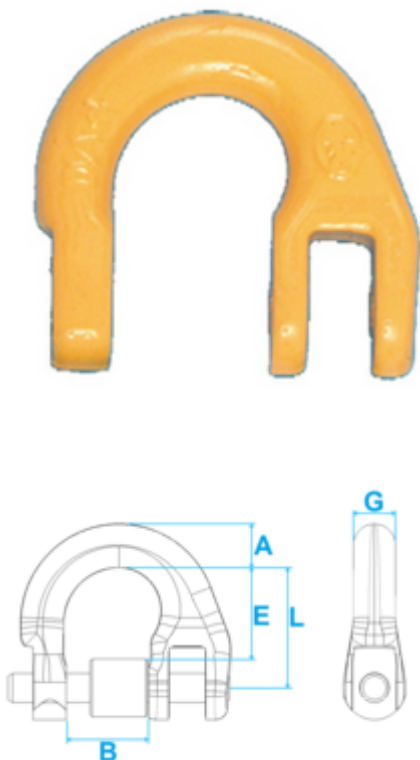

NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSCH]

WLL	SKT-7/8-8 G80 2t	SKT-10-8 G80 3.2t	SKT-13-8 G80 5.3t	SKT-16-8 G80 8t	SKT-18/20-8 G80 12.5t	SKT-22-8 G80 15.5t	SKT-26-8 G80 21.6t
2 t	2008719 SKT-7/8-8	-	-	-	-	-	-
3.2 t	-	2008720 SKT-10-8	-	-	-	-	-
5.3 t	-	-	2008721 SKT-13-8	-	-	-	-
8 t	-	-	-	2008722 SKT-16-8	-	-	-
12.5 t	-	-	-	-	2008723 SKT-18/20-8	-	-
15.5 t	-	-	-	-	-	2008724 SKT-22-8	-
21.6 t	-	-	-	-	-	-	2008725 SKT-26-8



■ Normes	EN 1677
■ Classe	80
■ Matériel principal	Acier
■ Couleur	Jaune
■ Contenu des unités d'emballage (UE)	1

