



### Enkele instelbare lijn zonder demper


Voor steigers volgens EN 358

Item Naam kort	Ankerverbinding	Harnasverbinding	L [m]	Lopende meter [kg]
WRI 1.5m 1OM1 1RH2	1RH2	1OM1	1.5	-
WRI 1.5m 1CK2	1CK2	1CK2	1.5	-
WRI 1.5m 1CK2 1RH2	1RH2	1CK2	1.5	-
WRI 1.5m 1OK1	1OK1	1OK1	1.5	-
WRI 1.5m 1OM1 1CK2	1CK2	1OM1	1.5	0.6
Foot Loop Lanyard	Loop Termination Only	Loop Termination Only	1.75	-
WRI 2m 1OM1 1CK2	1CK2	1OM1	2	-
WRI 2m 1OM1 1RH2	1RH2	1OM1	2	-
WRI 2m 1CK2	1CK2	1CK2	2	-
WRI 2m 1CK2 1RH2	1RH2	1CK2	2	-
WRI 2m 1OK1	1OK1	1OK1	2	-







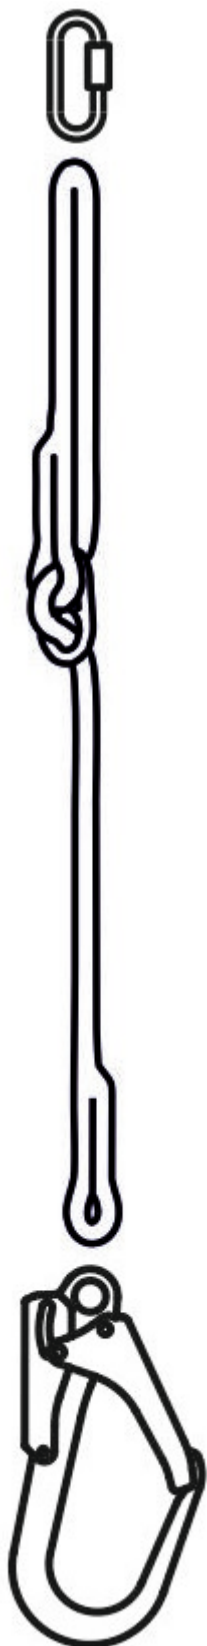












### BESTELNUMMERS [Global Item Number/Local ERP Number SSNL]

Harnasverbinding	Dimensie L				
		Loop Termination Only	10K1	1CK2	1RH2
 Loop Termination Only	1.75 m	2018429	-	-	-
 10M1	1.5 m	-	-	2002255	2004176
 10K1	1.5 m	-	2012576	-	-
 10M1	2 m	-	-	2003198	2003692
 10K1	2 m	-	2012902	-	-
 1CK2	1.5 m	-	-	2004177	2004178
 1CK2	2 m	-	-	2003693	2004174

■ Normen	EN 358: 2018
■ Hoofdmateriaal	Polyamide
■ Kleur	Zwart
■ Energieabsorptie	Nee
■ Labelbescherming	Ja
■ Verpakkingseenheid (PU) Inhoud	1

