


Eyebolt with ring VWBG-V

Optical markings to better recognize wear and stop angle



Item Name short	WLL kg Angle 0° [kg]	WLL t Angle 0° [t]	WLL kg Angle 90° [kg]	WLL t Angle 90° [t]	A [mm]	B [mm]	C [mm]
VWBG-V 0.3	600	0.6	300	0.3	8	31	29
VWBG-V 0.45	900	0.9	450	0.45	8	31	29
VWBG-V 0.6	1200	1.2	600	0.6	10	49	35
VWBG-V 1.3	2600	2.6	1300	1.3	13	46	38
VWBG-V 2.0	4000	4	2000	2	13	54	35
VWBG-V 3.5	7000	7	3500	3.5	18	66	40
VWBG-V 5.0	10000	10	5000	5	22	90	50

Item Name short	D [mm]	E [mm]	F [mm]	G [mm]	M [mm]	T [mm]	Weight Net [kg]
VWBG-V 0.3	30	28	13	36	8	76	0.25
VWBG-V 0.45	36	30	17	38	10	78	0.3
VWBG-V 0.6	42	36	21	47	12	107	0.5
VWBG-V 1.3	48	41	25	56	16	114	0.6
VWBG-V 2.0	62	55	33	67	20	137	1.1
VWBG-V 3.5	81	70	40	88	24	173	2.7
VWBG-V 5.0	99	85	50	106	30	221	5.5

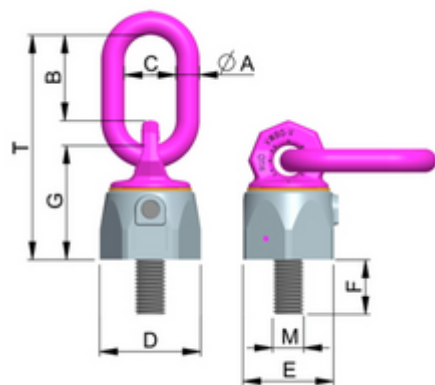

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Dimension M	0.6 t	0.9 t	1.2 t	2.6 t	4 t	7 t	10 t
8 mm	2009230	-	-	-	-	-	-
10 mm	-	2009265	-	-	-	-	-
12 mm	-	-	2009266	-	-	-	-
16 mm	-	-	-	2009267	-	-	-
20 mm	-	-	-	-	2009268	-	-
24 mm	-	-	-	-	-	2009269	-
30 mm	-	-	-	-	-	-	2009270

■ Norms	ISO 12100 EN 1677-1 EN 1677-4
■ Main Material	Steel
■ Colour	Pink
■ Temperature Range	-40°C bis +100°C

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

**SpanSet
Certified
Safety**

