




Eyebolt with ring VWBG-V VARIO

Optical markings to better recognize wear and stop angle

Item Name short	WLL kg Angle 0° [kg]	WLL t Angle 0° [t]	WLL kg Angle 90° [kg]	WLL t Angle 90° [t]	A [mm]	B [mm]	C [mm]
VWBG-V 0.3 VARIO	600	0.6	300	0.3	8	31	29
VWBG-V 0.45 VARIO	900	0.9	450	0.45	8	31	29
VWBG-V 0.6 VARIO	1200	1.2	600	0.6	10	49	35
VWBG-V 1.3 VARIO	2600	2.6	1300	1.3	13	46	38
VWBG-V 2.0	4000	4	2000	2	13	54	35
VWBG-V 3.5 VARIO	7000	7	3500	3.5	18	66	40
VWBG-V 5.0 VARIO	10000	10	5000	5	22	90	50

Item Name short	D [mm]	E [mm]	F [mm]	G [mm]	M [mm]	T [mm]	Weight Net [kg]
VWBG-V 0.3 VARIO	30	28	8 - 102	36	8	76	0.25
VWBG-V 0.45 VARIO	36	30	10 - 122	38	10	78	0.3
VWBG-V 0.6 VARIO	42	36	12 - 140	47	12	107	0.5
VWBG-V 1.3 VARIO	48	41	16 - 180	56	16	114	0.6
VWBG-V 2.0	62	55	20 - 223	67	20	137	1.1
VWBG-V 3.5 VARIO	81	70	24 - 255	88	24	173	2.7
VWBG-V 5.0 VARIO	99	85	30 - 330	106	30	221	5.5



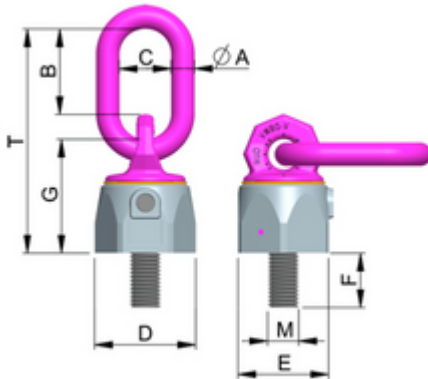

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

WLL t Angle 0°	8 mm	10 mm	12 mm	16 mm	20 mm	24 mm	30 mm
0.6 t	2020879	-	-	-	-	-	-
0.9 t	-	2020880	-	-	-	-	-
1.2 t	-	-	2020881	-	-	-	-
2.6 t	-	-	-	2020882	-	-	-
4 t	-	-	-	-	2020883	-	-
7 t	-	-	-	-	-	2020884	-
10 t	-	-	-	-	-	-	2020885

■ Norms	ISO 12100 EN 1677-4
■ Grade	120
■ Main Material	Steel
■ Colour	Pink
■ Temperature Range	-40°C bis +100°C
■ Packaging Unit (PU) Content	1

