


Gancho conexión de ojal y lengüeta de seguridad

Gancho para elevación de 1,5 t a 10 t

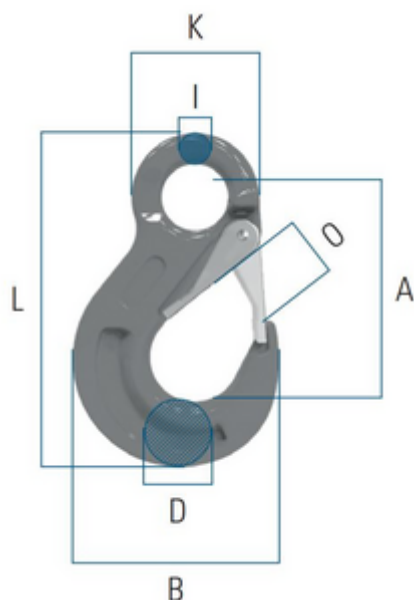

Nombre corto del Item	CMU [kg]	Diámetro de la cadena	CMU [t]	A [mm]	B [mm]	D [mm]	I [mm]
ESHC-6-10	1400	6 mm	1.4	79	68.5	21	10
ESHC-8-10	2500	8 mm	2.5	98	68.5	27.5	11
ESHC-10-10	4000	10 mm	4	121	105.5	33	16
ESHC-13-10	6700	13 mm	6.7	153	134	43.5	19
ESHC-16-10	10000	16 mm	10	185	160.5	50	24.5

Nombre corto del Item	K [mm]	L [mm]	O [mm]	Peso Neto [kg]
ESHC-6-10	20.5	111	18.5	0.32
ESHC-8-10	20.5	137.5	18.5	0.6
ESHC-10-10	34	171.5	28	1.2
ESHC-13-10	43	219	38	2.2
ESHC-16-10	50	260	44	3.5

REFERENCIAS DE PEDIDO[Global Item Number/Local ERP Number SSES]

Diámetro de la cadena	ESHC-6-10	ESHC-8-10	ESHC-10-10	ESHC-13-10	ESHC-16-10
6 mm	2018557 C11ESHC00601420	-	-	-	-
8 mm	-	2018561 C11ESHC00801420	-	-	-
10 mm	-	-	2018562 C11ESHC01001420	-	-
13 mm	-	-	-	2018563 C11ESHC01301420	-
16 mm	-	-	-	-	2018564 C11ESHC01601420



■ Normas	EN 1677
■ Grado	100
■ Material principal	Acero
■ Color	Azul
■ Rango de temperatura	-40°C / 200°C
■ Rango de temperatura	-40°F / 120°F
■ Unidad de embalaje (PU) Contiene	1

