


Gancho conexión directa y lengüeta de seguridad

Gancho conexión directa y lengüeta de seguridad EXOSET® – Grade 100

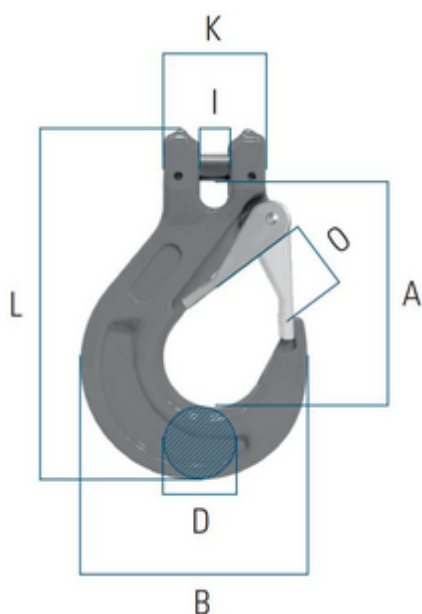

Nombre corto del Item	CMU [kg]	Diámetro de la cadena	CMU [t]	A [mm]	B [mm]	D [mm]	I [mm]
CSHC-6-10	1400	6 mm	1.4	72	68.5	21	7.5
CSHC-8-10	2500	8 mm	2.5	89	88	27.5	9.5
CSHC-10-10	4000	10 mm	4	103	105.5	33.5	12
CSHC-13-10	6700	13 mm	6.7	130	134	42	15
CSHC-16-10	10000	16 mm	10	160	160.5	50	17.5

Nombre corto del Item	K [mm]	L [mm]	O [mm]	Peso Neto [kg]
CSHC-6-10	32	109	18.5	0.4
CSHC-8-10	32	109	18.5	0.7
CSHC-10-10	48	161.5	28	1.3
CSHC-13-10	59	203	38	2.3
CSHC-16-10	70	248	44	2.3

REFERENCIAS DE PEDIDO[Global Item Number/Local ERP Number SSES]

Diámetro de la cadena	CSHC-6-10	CSHC-8-10	CSHC-10-10	CSHC-13-10	CSHC-16-10
6 mm	2022210 C11CSHC00601420	-	-	-	-
8 mm	-	2008903 C11CSHC00801420	-	-	-
10 mm	-	-	2008904 C11CSHC01001420	-	-
13 mm	-	-	-	2008905 C11CSHC01301420	-
16 mm	-	-	-	-	2022211 C11CSHC01601420



■ Normas	EN 1677
■ Grado	100
■ Material principal	Acero
■ Color	Azul
■ Rango de temperatura	-40°C / 200°C
■ Rango de temperatura	-40°F / 120°F
■ Unidad de embalaje (PU) Contiene	1

