


Gancho de encurtamento - Ligação direta Exoset® - GR100

Gancho para elevação de 1,5 t a 10 t

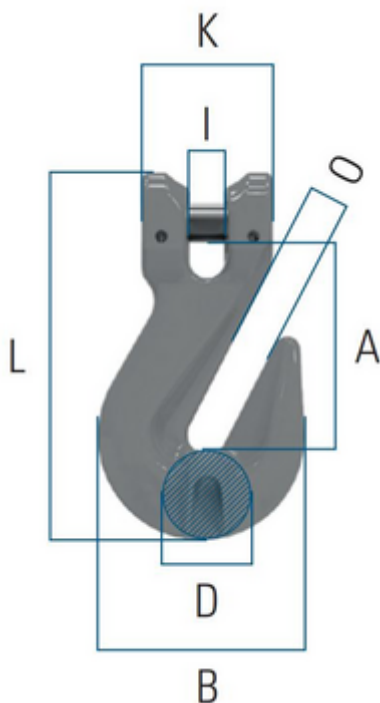

Nome curto do item	CMU [kg]	Diâmetro da corrente	CMU [t]	A [mm]	B [mm]	D [mm]	I [mm]
CGH-6-10	1400	6 mm	1.4	40	47	26	7.5
CGH-8-10	2500	8 mm	2.5	53	54	34	9.5
CGH-10-10	4000	10 mm	4	72	72	42	12.5
CGH-13-10	6700	13 mm	6.7	92	96	54	15
CGH-16-10	10000	16 mm	10	103	115	75	18.5

Nome curto do item	K [mm]	L [mm]	O [mm]	Peso líquido [kg]
CGH-6-10	32	77	8	0.20
CGH-8-10	32	77	8	0.34
CGH-10-10	46	127	13	0.82
CGH-13-10	59	164	15	1.75
CGH-16-10	70	188	19	2.88



NÚMEROS DE ORDEM[Global Item Number/Local ERP Number SSES]

Diâmetro da corrente	CGH-6-10	CGH-8-10	CGH-10-10	CGH-13-10	CGH-16-10
6 mm	2021369 C16CGHDX0601499	-	-	-	-
8 mm	-	2021370 C16CGHDX0802599	-	-	-
10 mm	-	-	2021371 C16CGHDX1004099	-	-
13 mm	-	-	-	2021372 C16CGHDX1006799	-
16 mm	-	-	-	-	2021373 C16CGHDX1610099

■ Normas	EN 1677
■ Grau	100
■ Material principal	Aço
■ Cor	Azul
■ Gama de temperaturas	-40°C / 200°C
■ Gama de temperaturas	-40°F / 120°F
■ Unidade de embalagem (PU) Contém	1

