


Grillete lira con pasador y tuerca de seguridad

Doble seguro que impide el desenroscado accidental del pasador



Nombre corto del ítem	CMU [kg]	CMU [t]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
G4-6-005	500	0.5	28.5	8	6	10	13
G4-6-007	750	0.75	31	10	8	10.5	14
G4-6-010	1000	1	37	11	10	13	17
G4-6-015	1500	1.5	43	13	11	14.5	18
G4-6-020	2000	2	48	16	13	16.5	21
G4-6-032	3250	3.25	60	19	16	21.5	27
G4-6-047	4750	4.75	71	22	19	25.5	32
G4-6-065	6500	6.5	84	25	22	29	37
G4-6-085	8500	8.5	95	28	25	34	43
G4-6-095	9500	9.5	108	32	30	37	46
G4-6-120	12000	12	119	35	32	41	51
G4-6-135	13500	13.5	132	38	35	45	57
G4-6-170	17000	17	146	40	40	49	60
G4-6-250	25000	25	178	45	45	63.5	73
G4-6-350	35000	35	197	50	50	73	83
G4-6-550	55000	55	230	65	65	90	105

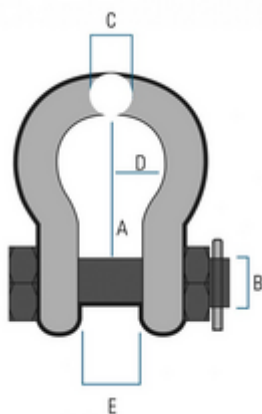



FICHA
TÉCNICA

Lifting
Grillete lira con pasador y tuerca de
seguridad
EN 13889

02

REFERENCIAS DE PEDIDO[Global Item Number/Local ERP Number SSES]

CMU [t]	G4-6-005	G4-6-007	G4-6-010	G4-6-015	G4-6-020	G4-6-032	G4-6-047	G4-6-065	G4-6-085	G4-6-0
0.5 t	2025760 G4-6-005	-	-	-	-	-	-	-	-	-
0.75 t	-	2025761 G4-6-007	-	-	-	-	-	-	-	-
1 t	-	-	2025762 G4-6-010	-	-	-	-	-	-	-
1.5 t	-	-	-	2025763 C83G4600110150X	-	-	-	-	-	-
2 t	-	-	-	-	2025764 C83G4600160200X	-	-	-	-	-
3.25 t	-	-	-	-	-	2025765 C83G4600193250X	-	-	-	-
4.75 t	-	-	-	-	-	-	2025766 C83G4600220470X	-	-	-
6.5 t	-	-	-	-	-	-	-	2025767 C83G4600250650X	-	-
8.5 t	-	-	-	-	-	-	-	-	2025768 C83G4600280850X	-
9.5 t	-	-	-	-	-	-	-	-	-	2025769 C83G4600310100X
12 t	-	-	-	-	-	-	-	-	-	-
13.5 t	-	-	-	-	-	-	-	-	-	-
17 t	-	-	-	-	-	-	-	-	-	-
25 t	-	-	-	-	-	-	-	-	-	-
35 t	-	-	-	-	-	-	-	-	-	-
55 t	-	-	-	-	-	-	-	-	-	-

CMU [t]	G4-6-135	G4-6-170	G4-6-250	G4-6-350	G4-6-550
0.5 t	-	-	-	-	-
0.75 t	-	-	-	-	-
1 t	-	-	-	-	-
1.5 t	-	-	-	-	-
2 t	-	-	-	-	-
3.25 t	-	-	-	-	-
4.75 t	-	-	-	-	-
6.5 t	-	-	-	-	-

CMU [t]	G4-6-135	G4-6-170	G4-6-250	G4-6-350	G4-6-550
8.5 t	-	-	-	-	-
9.5 t	-	-	-	-	-
12 t	-	-	-	-	-
13.5 t	2025771 C83G4600381350X	-	-	-	-
17 t	-	2025772 G4-6-170	-	-	-
25 t	-	-	2025773 G4-6-250	-	-
35 t	-	-	-	2025774 C83G4600573500X	-
55 t	-	-	-	-	2025775 G4-6-550

- Normas EN 13889
- Material principal Acero
- Color Gris
- Rango de temperatura -20 °C to + 200 °C
- Unidad de embalaje (PU) Contiene 1

