




Hyflex 18

Rotation Resistant & Low Rotation Conventional Multi Strands Products

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 18X7 6MM	6	25	2.5
HYFLEX 18X7 7MM	7	34	3.5
HYFLEX 18X7 8MM	8	45	4.6
HYFLEX 18X7 9MM	9	56.5	5.8
HYFLEX 18X7 10MM	10	70	7.1
HYFLEX 18X7 11MM	11	84	8.6
HYFLEX 18X7 12MM	12	101	10.3
HYFLEX 18X7 13MM	13	118	12
HYFLEX 18X7 14MM	14	137	14
HYFLEX 18X7 15MM	15	157	16
HYFLEX 18X7 16MM	16	180	18.3
HYFLEX 18X7 17MM	17	203	20.7
HYFLEX 18X7 18MM	18	226	23
HYFLEX 18X7 20MM	20	279	28.4
HYFLEX 18X7 22MM	22	339	34.6

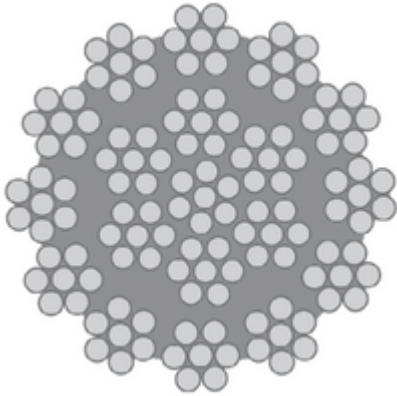

ORDER NUMBERS[Global Item Number/Local ERP Number SSID]

Rope Diameter	HYFLEX 18X7 6MM	HYFLEX 18X7 7MM	HYFLEX 18X7 8MM	HYFLEX 18X7 9MM	HYFLEX 18X7 10MM	HYFLEX 18X7 11MM	HYFLEX 18X7 12MM	HYFLEX 18X7 13MM	HYFLEX 18X7 14MM	HYFLEX 18X7 15MM
6 mm	2023326 UM18X700- WSd06.OSZ1960G	-	-	-	-	-	-	-	-	-
7 mm	-	2023327 UM18X700- WSd07.OSZ1960G	-	-	-	-	-	-	-	-
8 mm	-	-	2023328 UM18X700- WSd08.OSZ1960G	-	-	-	-	-	-	-
9 mm	-	-	-	2023329 UM18X700- WSd09.OSZ1960G	-	-	-	-	-	-
10 mm	-	-	-	-	2023330 UM18X700- WSd10.OSZ1960G	-	-	-	-	-
11 mm	-	-	-	-	-	2023331 UM18X700- WSd11.OSZ1960G	-	-	-	-
12 mm	-	-	-	-	-	-	2023332 UM18X700- WSd12.OSZ1960G	-	-	-
13 mm	-	-	-	-	-	-	-	2023333 UM18X700- WSd13.OSZ1960G	-	-
14 mm	-	-	-	-	-	-	-	-	2023334 UM18X700- WSd14.OSZ1960G	-
15 mm	-	-	-	-	-	-	-	-	-	U WSd15.OSZ1960G
16 mm	-	-	-	-	-	-	-	-	-	-
17 mm	-	-	-	-	-	-	-	-	-	-
18 mm	-	-	-	-	-	-	-	-	-	-
20 mm	-	-	-	-	-	-	-	-	-	-
22 mm	-	-	-	-	-	-	-	-	-	-

Rope Diameter	HYFLEX 18X7 17MM	HYFLEX 18X7 18MM	HYFLEX 18X7 20MM	HYFLEX 18X7 22MM
6 mm	-	-	-	-
7 mm	-	-	-	-

SpanSet Indonesia
Marunda Center Blok
F No.20 Segara
Makmur, Tarumajaya.
Bekasi, Indonesia.
17211
+62 21 285 100 77
sales@spanset.co.id
www.spanset.co.id



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Indonesia - Indonesia

**SpanSet
Certified
Safety**

Rope Diameter	HYFLEX 18X7 17MM	HYFLEX 18X7 18MM	HYFLEX 18X7 20MM	HYFLEX 18X7 22MM
8 mm	-	-	-	-
9 mm	-	-	-	-
10 mm	-	-	-	-
11 mm	-	-	-	-
12 mm	-	-	-	-
13 mm	-	-	-	-
14 mm	-	-	-	-
15 mm	-	-	-	-
16 mm	-	-	-	-
17 mm	2023337 UM18X700-WSd17.0SZ1960G	-	-	-
18 mm	-	2023338 UM18X700-WSd18.0SZ1960G	-	-
20 mm	-	-	2023339 UM18X700-WSd20.0SZ1960G	-
22 mm	-	-	-	2023340 UM18X700-WSd22.0SZ1960G

- Main Material Steel
- Temperature Range -40° C to + 100° C
- Packaging Unit (PU) Content 1

SpanSet Indonesia
Marunda Center Blok
F No.20 Segara
Makmur, Tarumajaya.
Bekasi, Indonesia.
17211
+62 21 285 100 77
sales@spanset.co.id
www.spanset.co.id



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Indonesia - Indonesia

**SpanSet
Certified
Safety**