




Hyflex 35

Rotation Resistant & Low Rotation Conventional Multi Strands Products

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 35X7 10MM	10	76	7.7
HYFLEX 35X7 11MM	11	91	9.3
HYFLEX 35X7 12MM	12	107	10.9
HYFLEX 35X7 13MM	13	128	12.5
HYFLEX 35X7 14MM	14	148	13
HYFLEX 35X7 16MM	16	194	15.1
HYFLEX 35X7 18MM	18	242	19.8
HYFLEX 35X7 19MM	19	277	247
HYFLEX 35X7 20MM	20	301	28.2
HYFLEX 35X7 21MM	21	335	30.7
HYFLEX 35X7 22MM	22	370	34.1
HYFLEX 35X7 24MM	24	441	37.7
HYFLEX 35X7 26MM	26	517	38.3
HYFLEX 35X7 28MM	28	599	45
HYFLEX 35X7 30MM	30	679	50.1
HYFLEX 35X7 32MM	32	769	52.7
HYFLEX 35X7 35MM	35	945	61.1
HYFLEX 35X7 36MM	36	983	69.2
HYFLEX 35X7 38MM	38	1078	78.4
HYFLEX 35X7 40MM	40	1202	96.3

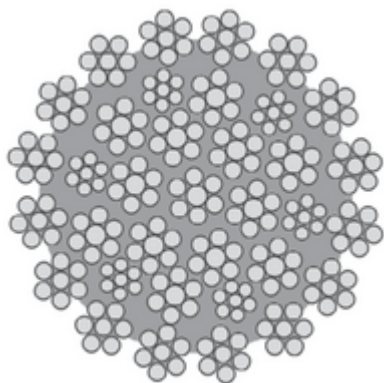

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 35X7 42MM	42	1227	100
HYFLEX 35X7 44MM	44	1347	137
HYFLEX 35X7 46MM	46	1472	150
HYFLEX 35X7 48MM	48	1603	163
HYFLEX 35X7 50MM	50	1740	177
HYFLEX 35X7 52MM	52	1881	192



ORDER NUMBERS[Global Item Number/Local ERP Number SSID]

Rope Diameter	HYFLEX 35X7 10MM	HYFLEX 35X7 11MM	HYFLEX 35X7 12MM	HYFLEX 35X7 13MM	HYFLEX 35X7 14MM	HYFLEX 35X7 16MM	HYFLEX 35X7 18MM	HYFLEX 35X7 19MM	HYFLEX 35X7 20MM	HYFLEX 35X7 22MM
10 mm	2023296 UM35X700- WSd10.0ZZ1960G	-	-	-	-	-	-	-	-	-
11 mm	-	2023297 UM35X700- WSd11.0ZZ1960G	-	-	-	-	-	-	-	-
12 mm	-	-	2023298 UM35X700- WSd12.0ZZ1960G	-	-	-	-	-	-	-
13 mm	-	-	-	2023299 UM35X700- WSd13.0ZZ1960G	-	-	-	-	-	-
14 mm	-	-	-	-	2023304 UM35X700- WSd14.0ZZ1960G	-	-	-	-	-
16 mm	-	-	-	-	-	2023305 UM35X700- WSd16.0ZZ1960G	-	-	-	-
18 mm	-	-	-	-	-	-	2023306 UM35X700- WSd18.0ZZ1960G	-	-	-
19 mm	-	-	-	-	-	-	-	2023307 UM35X700- WSd19.0ZZ1960G	-	-
20 mm	-	-	-	-	-	-	-	-	2023308 UM35X700- WSd20.0ZZ1960G	-
21 mm	-	-	-	-	-	-	-	-	-	2023309 UM35X700- WSd21.0ZZ1960G
22 mm	-	-	-	-	-	-	-	-	-	-
24 mm	-	-	-	-	-	-	-	-	-	-
26 mm	-	-	-	-	-	-	-	-	-	-
28 mm	-	-	-	-	-	-	-	-	-	-
30 mm	-	-	-	-	-	-	-	-	-	-
32 mm	-	-	-	-	-	-	-	-	-	-
35 mm	-	-	-	-	-	-	-	-	-	-
36 mm	-	-	-	-	-	-	-	-	-	-
38 mm	-	-	-	-	-	-	-	-	-	-
40 mm	-	-	-	-	-	-	-	-	-	-

SpanSet Indonesia
Marunda Center Blok
F No.20 Segara
Makmur, Tarumajaya.
Bekasi, Indonesia.
17211
+62 21 285 100 77
sales@spanset.co.id
www.spanset.co.id



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Indonesia - Indonesia

**SpanSet
Certified
Safety**

Rope Diameter	HYFLEX 35X7 10MM	HYFLEX 35X7 11MM	HYFLEX 35X7 12MM	HYFLEX 35X7 13MM	HYFLEX 35X7 14MM	HYFLEX 35X7 16MM	HYFLEX 35X7 18MM	HYFLEX 35X7 19MM	HYFLEX 35X7 20MM	HY
42 mm	-	-	-	-	-	-	-	-	-	
44 mm	-	-	-	-	-	-	-	-	-	
46 mm	-	-	-	-	-	-	-	-	-	
48 mm	-	-	-	-	-	-	-	-	-	
50 mm	-	-	-	-	-	-	-	-	-	
52 mm	-	-	-	-	-	-	-	-	-	

Rope Diameter	HYFLEX 35X7 24MM	HYFLEX 35X7 26MM	HYFLEX 35X7 28MM	HYFLEX 35X7 30MM	HYFLEX 35X7 32MM	HYFLEX 35X7 35MM	HYFLEX 35X7 36MM	HYFLEX 35X7 38MM	HYFLEX 35X7 40MM	HY
10 mm	-	-	-	-	-	-	-	-	-	
11 mm	-	-	-	-	-	-	-	-	-	
12 mm	-	-	-	-	-	-	-	-	-	
13 mm	-	-	-	-	-	-	-	-	-	
14 mm	-	-	-	-	-	-	-	-	-	
16 mm	-	-	-	-	-	-	-	-	-	
18 mm	-	-	-	-	-	-	-	-	-	
19 mm	-	-	-	-	-	-	-	-	-	
20 mm	-	-	-	-	-	-	-	-	-	
21 mm	-	-	-	-	-	-	-	-	-	
22 mm	-	-	-	-	-	-	-	-	-	
24 mm	2023311 UM35X700- WSd24.0ZZ1960G		-	-	-	-	-	-	-	
26 mm	-	2023312 UM35X700- WSd26.0ZZ1960G		-	-	-	-	-	-	
28 mm	-	-	2023313 UM35X700- WSd28.0ZZ1960G		-	-	-	-	-	
30 mm	-	-	-	2023314 UM35X700- WSd30.0ZZ1960G		-	-	-	-	
32 mm	-	-	-	-	2023315 UM35X700- WSd32.0ZZ1960G		-	-	-	
35 mm	-	-	-	-	-	2023316 UM35X700- WSd35.0ZZ1960G		-	-	



Rope Diameter	HYFLEX 35X7 24MM	HYFLEX 35X7 26MM	HYFLEX 35X7 28MM	HYFLEX 35X7 30MM	HYFLEX 35X7 32MM	HYFLEX 35X7 35MM	HYFLEX 35X7 36MM	HYFLEX 35X7 38MM	HYFLEX 35X7 40MM	HY
36 mm	-	-	-	-	-	-	2023317 UM35X700- Wsd36.0ZZ1960G	-	-	
38 mm	-	-	-	-	-	-	-	2023318 UM35X700- Wsd38.0ZZ1960G	-	
40 mm	-	-	-	-	-	-	-	-	2023319 UM35X700- Wsd40.0ZZ1960G	
42 mm	-	-	-	-	-	-	-	-	-	
44 mm	-	-	-	-	-	-	-	-	-	
46 mm	-	-	-	-	-	-	-	-	-	
48 mm	-	-	-	-	-	-	-	-	-	
50 mm	-	-	-	-	-	-	-	-	-	
52 mm	-	-	-	-	-	-	-	-	-	

Rope Diameter	HYFLEX 35X7 46MM	HYFLEX 35X7 48MM	HYFLEX 35X7 50MM	HYFLEX 35X7 52MM
10 mm	-	-	-	-
11 mm	-	-	-	-
12 mm	-	-	-	-
13 mm	-	-	-	-
14 mm	-	-	-	-
16 mm	-	-	-	-
18 mm	-	-	-	-
19 mm	-	-	-	-
20 mm	-	-	-	-
21 mm	-	-	-	-
22 mm	-	-	-	-
24 mm	-	-	-	-
26 mm	-	-	-	-
28 mm	-	-	-	-
30 mm	-	-	-	-
32 mm	-	-	-	-



Rope Diameter	HYFLEX 35X7 46MM	HYFLEX 35X7 48MM	HYFLEX 35X7 50MM	HYFLEX 35X7 52MM
35 mm	-	-	-	-
36 mm	-	-	-	-
38 mm	-	-	-	-
40 mm	-	-	-	-
42 mm	-	-	-	-
44 mm	-	-	-	-
46 mm	2023322 UM35X700-WSd46.0ZZ1960G	-	-	-
48 mm	-	2023323 UM35X700-WSd48.0ZZ1960G	-	-
50 mm	-	-	2023324 UM35X700-WSd50.0ZZ1960G	-
52 mm	-	-	-	2023325 UM35X700-WSd52.0ZZ1960G

- Main Material Steel
- Temperature Range -40° C to + 100° C
- Packaging Unit (PU) Content 1

