




Hyflex 4 LHOL

General Purpose Ropes 4 Strands Conventional Products

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
USHA 14MM 4x39 FC LHOL	14	136	13.9
USHA 16MM 4x39 FC LHOL	16	177	18.1
USHA 18MM 4x39 FC LHOL	18	225	22.9
USHA 20MM 4x39 FC LHOL	20	277	28.3
USHA 22MM 4x39 FC LHOL	22	335	34.2
USHA 24MM 4x39 FC LHOL	24	399	40.7
USHA 25MM 4x39 FC LHOL	25	433	44.2
USHA 26MM 4x39 FC LHOL	26	468	47.8
USHA 28MM 4x39 FC LHOL	28	543	55.4
USHA 30MM 4x39 FC LHOL	30	624	63.6
USHA 32MM 4x39 FC LHOL	32	710	72.4
USHA 33.5MM 4x39 FC LHOL	33.5	778	79.3
USHA 34MM 4x39 FC LHOL	34	801	81.7
USHA 35.5MM 4x39 FC LHOL	35.5	873	89.1
USHA 36MM 4x39 FC LHOL	36	898	91.6
USHA 38MM 4x39 FC LHOL	38	1001	102

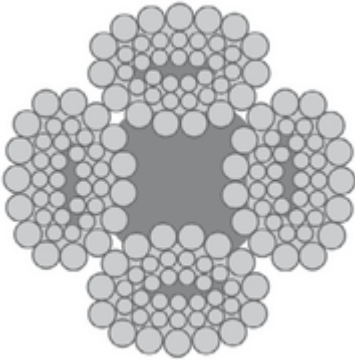

ORDER NUMBERS[Global Item Number/Local ERP Number SSID]

Rope Diameter	USHA 14MM 4x39 FC LHOL	USHA 16MM 4x39 FC LHOL	USHA 18MM 4x39 FC LHOL	USHA 20MM 4x39 FC LHOL	USHA 22MM 4x39 FC LHOL	USHA 24MM 4x39 FC LHOL	USHA 25MM 4x39 FC LHOL	USHA 26MM 4x39 FC LHOL	USHA 28MM 4x39 FC LHOL	USHA 30MM 4x39 FC LHOL
14 mm	2023942 UM4X3900- FCd14.0ZS1960G	-	-	-	-	-	-	-	-	-
16 mm	-	2023943 UM4X3900- FCd16.0ZS1960G	-	-	-	-	-	-	-	-
18 mm	-	-	2023944 UM4X3900- FCd18.0ZS1960G	-	-	-	-	-	-	-
20 mm	-	-	-	2023945 UM4X3900- FCd20.0ZS1960G	-	-	-	-	-	-
22 mm	-	-	-	-	2023946 UM4X3900- FCd22.0ZS1960G	-	-	-	-	-
24 mm	-	-	-	-	-	2023947 UM4X3900- FCd24.0ZS1960G	-	-	-	-
25 mm	-	-	-	-	-	-	2023948 UM4X3900- FCd25.0ZS1960G	-	-	-
26 mm	-	-	-	-	-	-	-	2023949 UM4X3900- FCd26.0ZS1960G	-	-
28 mm	-	-	-	-	-	-	-	-	2023950 UM4X3900- FCd28.0ZS1960G	-
30 mm	-	-	-	-	-	-	-	-	-	2023951 UM4X3900- FCd30.0ZS1960G
32 mm	-	-	-	-	-	-	-	-	-	-
33.5 mm	-	-	-	-	-	-	-	-	-	-
34 mm	-	-	-	-	-	-	-	-	-	-
35.5 mm	-	-	-	-	-	-	-	-	-	-
36 mm	-	-	-	-	-	-	-	-	-	-
38 mm	-	-	-	-	-	-	-	-	-	-



Rope Diameter	USHA 33.5MM 4x39 FC LHOL	USHA 34MM 4x39 FC LHOL	USHA 35.5MM 4x39 FC LHOL	USHA 36MM 4x39 FC LHOL	USHA 38MM 4x39 FC LHOL
14 mm	-	-	-	-	-
16 mm	-	-	-	-	-
18 mm	-	-	-	-	-
20 mm	-	-	-	-	-
22 mm	-	-	-	-	-
24 mm	-	-	-	-	-
25 mm	-	-	-	-	-
26 mm	-	-	-	-	-
28 mm	-	-	-	-	-
30 mm	-	-	-	-	-
32 mm	-	-	-	-	-
33.5 mm	2023953 UM4X3900-FCd33.5ZS1960G	-	-	-	-
34 mm	-	2023954 UM4X3900-FCd34.0ZS1960G	-	-	-
35.5 mm	-	-	2023955 UM4X3900-FCd35.5ZS1960G	-	-
36 mm	-	-	-	2023956 UM4X3900-FCd36.0ZS1960G	-
38 mm	-	-	-	-	2023957 UM4X3900-FCd38.0ZS1960G

- Main Material Steel
- Temperature Range -40° C to + 100° C
- Packaging Unit (PU) Content 1

