




Hyflex 6x19 LHOL

General Purpose Ropes 6 & 8 Strands Conventional Products

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 6X19 6MM LHOL	6	25.1	2.6
HYFLEX 6X19 7MM LHOL	7	34.2	3.5
HYFLEX 6X19 8MM LHOL	8	44.7	4.6
HYFLEX 6X19 9MM LHOL	9	56.5	5.8
HYFLEX 6X19 10MM LHOL	10	69.8	7.1
HYFLEX 6X19 11MM LHOL	11	84.4	8.6
HYFLEX 6X19 12MM LHOL	12	101	10.3
HYFLEX 6X19 13MM LHOL	13	118	12
HYFLEX 6X19 14MM LHOL	14	137	14
HYFLEX 6X19 16MM LHOL	16	179	18.3
HYFLEX 6X19 18MM LHOL	18	226	23
HYFLEX 6X19 20MM LHOL	20	279	28.4
HYFLEX 6X19 22MM LHOL	22	338	34.5
HYFLEX 6X19 24MM LHOL	24	402	41
HYFLEX 6X19 26MM LHOL	26	472	48.1
HYFLEX 6X19 28MM LHOL	28	547	55.8
HYFLEX 6X19 32MM LHOL	32	715	72.9
HYFLEX 6X19 36MM LHOL	36	904	92.2
HYFLEX 6X19 40MM LHOL	40	1120	114
HYFLEX 6X19 44MM LHOL	44	1350	138

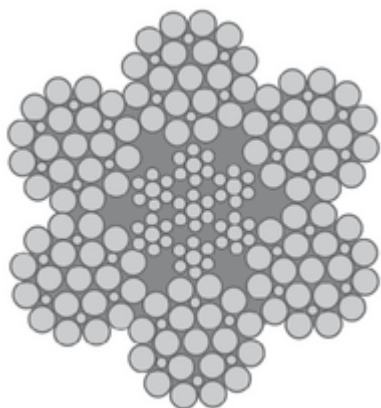

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 6X19 48MM LHOL	48	1610	164
HYFLEX 6X19 52MM LHOL	52	1890	193
HYFLEX 6X19 56MM LHOL	56	2190	223
HYFLEX 6X19 60MM LHOL	60	2510	256



ORDER NUMBERS[Global Item Number/Local ERP Number SSID]

Rope Diameter	HYFLEX 6X19 6MM LHOL	HYFLEX 6X19 7MM LHOL	HYFLEX 6X19 8MM LHOL	HYFLEX 6X19 9MM LHOL	HYFLEX 6X19 10MM LHOL	HYFLEX 6X19 11MM LHOL	HYFLEX 6X19 12MM LHOL	HYFLEX 6X19 13MM LHOL	HYFLEX 6X19 14MM LHOL	HYFLEX 6X19 16MM LHOL
6 mm	2023854 UM6X1900- WSd06.0ZS1960G	-	-	-	-	-	-	-	-	-
7 mm	-	2023855 UM6X1900- IWd07.0ZS1960G	-	-	-	-	-	-	-	-
8 mm	-	-	2023856 UM6X1900- IWd08.0ZS1960G	-	-	-	-	-	-	-
9 mm	-	-	-	2023857 UM6X1900- IWd09.0ZS1960G	-	-	-	-	-	-
10 mm	-	-	-	-	2023858 UM6X1900- IWd10.0ZS1960G	-	-	-	-	-
11 mm	-	-	-	-	-	2023859 UM6X1900- IWd11.0ZS1960G	-	-	-	-
12 mm	-	-	-	-	-	-	2023860 UM6X1900- IWd12.0ZS1960G	-	-	-
13 mm	-	-	-	-	-	-	-	2023861 UM6X1900- IWd13.0ZS1960G	-	-
14 mm	-	-	-	-	-	-	-	-	2023862 UM6X1900- IWd14.0ZS1960G	-
16 mm	-	-	-	-	-	-	-	-	-	2023863 UM6X1900- IWd16.0ZS1960G
18 mm	-	-	-	-	-	-	-	-	-	-
20 mm	-	-	-	-	-	-	-	-	-	-
22 mm	-	-	-	-	-	-	-	-	-	-
24 mm	-	-	-	-	-	-	-	-	-	-
26 mm	-	-	-	-	-	-	-	-	-	-
28 mm	-	-	-	-	-	-	-	-	-	-
32 mm	-	-	-	-	-	-	-	-	-	-
36 mm	-	-	-	-	-	-	-	-	-	-
40 mm	-	-	-	-	-	-	-	-	-	-



Rope Diameter	HYFLEX 6X19 6MM LHOL	HYFLEX 6X19 7MM LHOL	HYFLEX 6X19 8MM LHOL	HYFLEX 6X19 9MM LHOL	HYFLEX 6X19 10MM LHOL	HYFLEX 6X19 11MM LHOL	HYFLEX 6X19 12MM LHOL	HYFLEX 6X19 13MM LHOL	HYFLEX 6X19 14MM LHOL	HYFLEX 6X19 15MM LHOL
44 mm	-	-	-	-	-	-	-	-	-	-
48 mm	-	-	-	-	-	-	-	-	-	-
52 mm	-	-	-	-	-	-	-	-	-	-
56 mm	-	-	-	-	-	-	-	-	-	-
60 mm	-	-	-	-	-	-	-	-	-	-

Rope Diameter	HYFLEX 6X19 20MM LHOL	HYFLEX 6X19 22MM LHOL	HYFLEX 6X19 24MM LHOL	HYFLEX 6X19 26MM LHOL	HYFLEX 6X19 28MM LHOL	HYFLEX 6X19 32MM LHOL	HYFLEX 6X19 36MM LHOL	HYFLEX 6X19 40MM LHOL	HYFLEX 6X19 44MM LHOL	HYFLEX 6X19 48MM LHOL
6 mm	-	-	-	-	-	-	-	-	-	-
7 mm	-	-	-	-	-	-	-	-	-	-
8 mm	-	-	-	-	-	-	-	-	-	-
9 mm	-	-	-	-	-	-	-	-	-	-
10 mm	-	-	-	-	-	-	-	-	-	-
11 mm	-	-	-	-	-	-	-	-	-	-
12 mm	-	-	-	-	-	-	-	-	-	-
13 mm	-	-	-	-	-	-	-	-	-	-
14 mm	-	-	-	-	-	-	-	-	-	-
16 mm	-	-	-	-	-	-	-	-	-	-
18 mm	-	-	-	-	-	-	-	-	-	-
20 mm	2023865 UM6X1900- IWd20.0ZS1960G	-	-	-	-	-	-	-	-	-
22 mm	-	2023866 UM6X1900- IWd22.0ZS1960G	-	-	-	-	-	-	-	-
24 mm	-	-	2023867 UM6X1900- IWd24.0ZS1960G	-	-	-	-	-	-	-
26 mm	-	-	-	2023868 UM6X1900- IWd26.0ZS1960G	-	-	-	-	-	-
28 mm	-	-	-	-	2023869 UM6X1900- IWd28.0ZS1960G	-	-	-	-	-
32 mm	-	-	-	-	-	2023870 UM6X1900- IWd32.0ZS1960G	-	-	-	-



Rope Diameter	HYFLEX 6X19 20MM LHOL	HYFLEX 6X19 22MM LHOL	HYFLEX 6X19 24MM LHOL	HYFLEX 6X19 26MM LHOL	HYFLEX 6X19 28MM LHOL	HYFLEX 6X19 32MM LHOL	HYFLEX 6X19 36MM LHOL	HYFLEX 6X19 40MM LHOL	HYFLEX 6X19 44MM LHOL	HYFLEX 6X19 48MM LHOL
36 mm	-	-	-	-	-	-	2023871 UM6X1900- IWd36.0ZS1960G	-	-	-
40 mm	-	-	-	-	-	-	-	2023872 UM6X1900- IWd40.0ZS1960G	-	-
44 mm	-	-	-	-	-	-	-	-	2023873 UM6X1900- IWd44.0ZS1960G	-
48 mm	-	-	-	-	-	-	-	-	-	2023874 UM6X1900- IWd48.0ZS1960G
52 mm	-	-	-	-	-	-	-	-	-	-
56 mm	-	-	-	-	-	-	-	-	-	-
60 mm	-	-	-	-	-	-	-	-	-	-

Rope Diameter	HYFLEX 6X19 56MM LHOL	HYFLEX 6X19 60MM LHOL
6 mm	-	-
7 mm	-	-
8 mm	-	-
9 mm	-	-
10 mm	-	-
11 mm	-	-
12 mm	-	-
13 mm	-	-
14 mm	-	-
16 mm	-	-
18 mm	-	-
20 mm	-	-
22 mm	-	-
24 mm	-	-
26 mm	-	-
28 mm	-	-
32 mm	-	-
36 mm	-	-



Rope Diameter	HYFLEX 6X19 56MM LHOL	HYFLEX 6X19 60MM LHOL
40 mm	-	-
44 mm	-	-
48 mm	-	-
52 mm	-	-
56 mm	2023876 UM6X1900-IWd56.0ZS1960G	-
60 mm	-	2023877 UM6X1900-IWd60.0ZS1960G

- Main Material Steel
- Temperature Range -40° C to + 100° C
- Packaging Unit (PU) Content 1

