




Hyflex 6x19 RHOL

General Purpose Ropes 6 & 8 Strands Conventional Products

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 6X19 6MM RHOL	6	25.1	2.6
HYFLEX 6X19 7MM RHOL	7	34.2	3.5
HYFLEX 6X19 8MM RHOL	8	44.7	4.6
HYFLEX 6X19 9MM RHOL	9	56.5	5.8
HYFLEX 6X19 10MM RHOL	10	69.8	7.1
HYFLEX 6X19 11MM RHOL	11	84.4	8.6
HYFLEX 6X19 12MM RHOL	12	101	10.3
HYFLEX 6X19 13MM RHOL	13	118	12
HYFLEX 6X19 14MM RHOL	14	137	14
HYFLEX 6X19 16MM RHOL	16	179	18.3
HYFLEX 6X19 18MM RHOL	18	226	23
HYFLEX 6X19 20MM RHOL	20	279	28.4
HYFLEX 6X19 22MM RHOL	22	338	34.5
HYFLEX 6X19 24MM RHOL	24	402	41
HYFLEX 6X19 26MM RHOL	26	472	48.1
HYFLEX 6X19 28MM RHOL	28	547	55.8
HYFLEX 6X19 32MM RHOL	32	715	72.9
HYFLEX 6X19 36MM RHOL	36	904	92.2
HYFLEX 6X19 40MM RHOL	40	1120	114
HYFLEX 6X19 44MM RHOL	44	1350	138

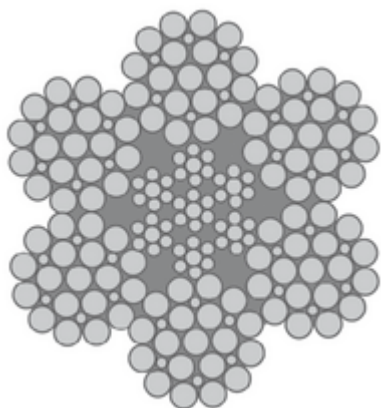

Item Name short	Rope Diameter [mm]	Minimum Breaking Force [Kn] [kN]	Minimum Breaking Force [Tn] [t]
HYFLEX 6X19 48MM RHOL	48	1610	164
HYFLEX 6X19 52MM RHOL	52	1890	193
HYFLEX 6X19 56MM RHOL	56	2190	223
HYFLEX 6X19 60MM RHOL	60	2510	256



ORDER NUMBERS[Global Item Number/Local ERP Number SSID]

Rope Diameter	HYFLEX 6X19 6MM RHOL	HYFLEX 6X19 7MM RHOL	HYFLEX 6X19 8MM RHOL	HYFLEX 6X19 9MM RHOL	HYFLEX 6X19 10MM RHOL	HYFLEX 6X19 11MM RHOL	HYFLEX 6X19 12MM RHOL	HYFLEX 6X19 13MM RHOL	HYFLEX 6X19 14MM RHOL	HYFLEX 6X19 16MM RHOL
6 mm	2023802 UM6X1900- WSd06.OSZ1960G	-	-	-	-	-	-	-	-	-
7 mm	-	2023803 UM6X1900- IWd07.OSZ1960G	-	-	-	-	-	-	-	-
8 mm	-	-	2023804 UM6X1900- IWd08.OSZ1960G	-	-	-	-	-	-	-
9 mm	-	-	-	2023805 UM6X1900- IWd09.OSZ1960G	-	-	-	-	-	-
10 mm	-	-	-	-	2023806 UM6X1900- IWd10.OSZ1960G	-	-	-	-	-
11 mm	-	-	-	-	-	2023807 UM6X1900- IWd11.OSZ1960G	-	-	-	-
12 mm	-	-	-	-	-	-	2023808 UM6X1900- IWd12.OSZ1960G	-	-	-
13 mm	-	-	-	-	-	-	-	2023809 UM6X1900- IWd13.OSZ1960G	-	-
14 mm	-	-	-	-	-	-	-	-	2023810 UM6X1900- IWd14.OSZ1960G	-
16 mm	-	-	-	-	-	-	-	-	-	2023812 UM6X1900- IWd16.OSZ1960G
18 mm	-	-	-	-	-	-	-	-	-	-
20 mm	-	-	-	-	-	-	-	-	-	-
22 mm	-	-	-	-	-	-	-	-	-	-
24 mm	-	-	-	-	-	-	-	-	-	-
26 mm	-	-	-	-	-	-	-	-	-	-
28 mm	-	-	-	-	-	-	-	-	-	-
32 mm	-	-	-	-	-	-	-	-	-	-
36 mm	-	-	-	-	-	-	-	-	-	-
40 mm	-	-	-	-	-	-	-	-	-	-



Rope Diameter	HYFLEX 6X19 6MM RHOL	HYFLEX 6X19 7MM RHOL	HYFLEX 6X19 8MM RHOL	HYFLEX 6X19 9MM RHOL	HYFLEX 6X19 10MM RHOL	HYFLEX 6X19 11MM RHOL	HYFLEX 6X19 12MM RHOL	HYFLEX 6X19 13MM RHOL	HYFLEX 6X19 14MM RHOL	HYFLEX 6X19 15MM RHOL
44 mm	-	-	-	-	-	-	-	-	-	-
48 mm	-	-	-	-	-	-	-	-	-	-
52 mm	-	-	-	-	-	-	-	-	-	-
56 mm	-	-	-	-	-	-	-	-	-	-
60 mm	-	-	-	-	-	-	-	-	-	-

Rope Diameter	HYFLEX 6X19 20MM RHOL	HYFLEX 6X19 22MM RHOL	HYFLEX 6X19 24MM RHOL	HYFLEX 6X19 26MM RHOL	HYFLEX 6X19 28MM RHOL	HYFLEX 6X19 32MM RHOL	HYFLEX 6X19 36MM RHOL	HYFLEX 6X19 40MM RHOL	HYFLEX 6X19 44MM RHOL	HYFLEX 6X19 48MM RHOL
6 mm	-	-	-	-	-	-	-	-	-	-
7 mm	-	-	-	-	-	-	-	-	-	-
8 mm	-	-	-	-	-	-	-	-	-	-
9 mm	-	-	-	-	-	-	-	-	-	-
10 mm	-	-	-	-	-	-	-	-	-	-
11 mm	-	-	-	-	-	-	-	-	-	-
12 mm	-	-	-	-	-	-	-	-	-	-
13 mm	-	-	-	-	-	-	-	-	-	-
14 mm	-	-	-	-	-	-	-	-	-	-
16 mm	-	-	-	-	-	-	-	-	-	-
18 mm	-	-	-	-	-	-	-	-	-	-
20 mm	2023813 UM6X1900- IWd20.OSZ1960G	-	-	-	-	-	-	-	-	-
22 mm	-	2023814 UM6X1900- IWd22.OSZ1960G	-	-	-	-	-	-	-	-
24 mm	-	-	2023815 UM6X1900- IWd24.OSZ1960G	-	-	-	-	-	-	-
26 mm	-	-	-	2023816 UM6X1900- IWd26.OSZ1960G	-	-	-	-	-	-
28 mm	-	-	-	-	2023817 UM6X1900- IWd28.OSZ1960G	-	-	-	-	-
32 mm	-	-	-	-	-	2023818 UM6X1900- IWd32.OSZ1960G	-	-	-	-



Rope Diameter	HYFLEX 6X19 20MM RHOL	HYFLEX 6X19 22MM RHOL	HYFLEX 6X19 24MM RHOL	HYFLEX 6X19 26MM RHOL	HYFLEX 6X19 28MM RHOL	HYFLEX 6X19 32MM RHOL	HYFLEX 6X19 36MM RHOL	HYFLEX 6X19 40MM RHOL	HYFLEX 6X19 44MM RHOL	HYFLEX 6X19 48MM RHOL
36 mm	-	-	-	-	-	-	2023819 UM6X1900- IWd36.0SZ1960G	-	-	-
40 mm	-	-	-	-	-	-	-	2023820 UM6X1900- IWd40.0SZ1960G	-	-
44 mm	-	-	-	-	-	-	-	-	2023821 UM6X1900- IWd44.0SZ1960G	-
48 mm	-	-	-	-	-	-	-	-	-	2023822 UM6X1900- IWd48.0SZ1960G
52 mm	-	-	-	-	-	-	-	-	-	-
56 mm	-	-	-	-	-	-	-	-	-	-
60 mm	-	-	-	-	-	-	-	-	-	-

Rope Diameter	HYFLEX 6X19 56MM RHOL	HYFLEX 6X19 60MM RHOL
6 mm	-	-
7 mm	-	-
8 mm	-	-
9 mm	-	-
10 mm	-	-
11 mm	-	-
12 mm	-	-
13 mm	-	-
14 mm	-	-
16 mm	-	-
18 mm	-	-
20 mm	-	-
22 mm	-	-
24 mm	-	-
26 mm	-	-
28 mm	-	-
32 mm	-	-
36 mm	-	-



Rope Diameter	HYFLEX 6X19 56MM RHOL	HYFLEX 6X19 60MM RHOL
40 mm	-	-
44 mm	-	-
48 mm	-	-
52 mm	-	-
56 mm	2023824 UM6X1900-IWd56.0SZ1960G	-
60 mm	-	2023825 UM6X1900-IWd60.0SZ1960G

- Main Material Steel
- Temperature Range -40° C to + 100° C
- Packaging Unit (PU) Content 1

