


Isolierter Kugeldrallfänger

Mit einer Isolationsleistung bis 1000 Volt



Artikel Name kurz	WLL [kg]	WLL [t]	D [mm]	L [mm]	Nettogewicht kg [kg]
SKLI-7/8-8 G80 2t	2000	2	48	75	0.7
SKLI-10-8 G80 3.2t	3200	3.2	59	96	1.4
SKLI-13-8 G80 5.3t	5300	5.3	75	120	2.9
SKLI-16-8 G80 8t	8000	8	90	137	4.9
SKLI-18/20-8 G80 12.5t	12500	12.5	104	159	7.2

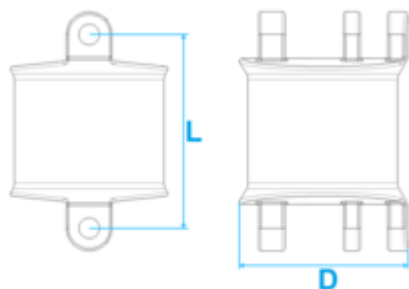

BESTELLNUMMERN[Global Item Number/Local ERP Number SSCH]

WLL	SKLI-7/8-8 G80 2t	SKLI-10-8 G80 3.2t	SKLI-13-8 G80 5.3t	SKLI-16-8 G80 8t	SKLI-18/20-8 G80 12.5t
2 t	2015252 SKLI-7/8-8	-	-	-	-
3.2 t	-	2015253 SKLI-10-8	-	-	-
5.3 t	-	-	2015254 SKLI-13-8	-	-
8 t	-	-	-	2015255 SKLI-16-8	-
12.5 t	-	-	-	-	2015256 SKLI-18/20-8



■ Normen	EN 1677 ISO 8539
■ Klasse	80
■ Hauptmaterial	Stahl
■ Farbe	Gelb
■ Verpackungseinheit (VPE) Inhalt	1

