


Lifting bracket Thread VLBG-PLUS

Full load capacity in all load directions

Item Name short	WLL kg Angle 0° [kg]	WLL t Angle 0° [t]	WLL kg Angle 90° [kg]	WLL t Angle 90° [t]	A [mm]	B [mm]	C [mm]
VLBG+M8	630	0.63	630	0.63	30	54	34
VLBG+M10	900	0.9	900	0.9	30	54	34
VLBG+M12	1350	1.35	1350	1.35	32	54	34
VLBG+M16	2000	2	2000	2	33	56	36
VLBG+M20	3500	3.5	3500	3.5	50	82	54
VLBG+M24	4500	4.5	4500	4.5	50	82	54
VLBG+M30	6700	6.7	6700	6.7	60	103	65
VLBG+M36	8000	8	8000	8	77	122	85
VLBG+(10)M42	10000	10	10000	10	77	122	82
VLBG+(15)M42	15000	15	15000	15	95	156	100
VLBG+M48	20000	20	20000	20	95	156	100

Item Name short	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]
VLBG+M8	24	40	10	29	11	75	45
VLBG+M10	24	39	10	29	15	75	45
VLBG+M12	26	38	10	29	18	75	45
VLBG+M16	30	39	13.5	36	22	86	47
VLBG+M20	45	55	16.5	43	32	113	64
VLBG+M24	45	67	18	43	37	130	78
VLBG+M30	60	67	22.5	61	49	151	80
VLBG+M36	70	97	26.5	77	63	205	110
VLBG+(10)M42	70	94	26.5	77	73	205	110
VLBG+(15)M42	85	109	36	87	63	230	130
VLBG+M48	95	105	36	84	73	230	130

Item Name short	L [mm]	M [mm]	N [mm]	T [mm]	Weight Net [kg]
VLBG+M8	40	8	32	75	0.3
VLBG+M10	44	10	32	75	0.32
VLBG+M12	47	12	32	75	0.33

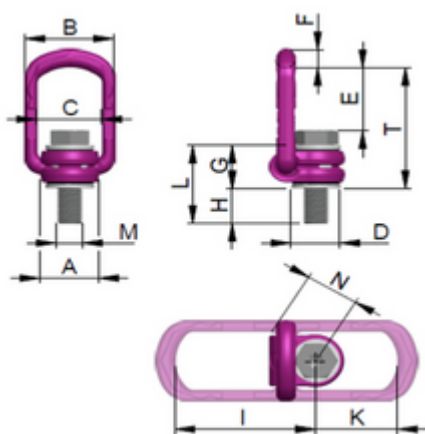

Item Name short	L [mm]	M [mm]	N [mm]	T [mm]	Weight Net [kg]
VLBG+M16	58	16	38	85	0.55
VLBG+M20	75	20	48	110	1.3
VLBG+M24	80	24	48	125	1.5
VLBG+M30	110	30	67	147	3.3
VLBG+M36	140	36	87	197	6.2
VLBG+(10)M42	150	42	70	197	6.7
VLBG+(15)M42	150	42	100	222	11.2
VLBG+M48	160	48	100	222	11.6

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

WLL t Angle 0°	VLBG+M8	VLBG+M10	VLBG+(10)M42	VLBG+M12	VLBG+(15)M42	VLBG+M16	VLBG+M20	VLBG+M24	VLBG+M30	VLBG+M36	VLBG+M48
0.63 t	2009220	-	-	-	-	-	-	-	-	-	-
0.9 t	-	2009221	-	-	-	-	-	-	-	-	-
1.35 t	-	-	-	2009222	-	-	-	-	-	-	-
2 t	-	-	-	-	-	2009223	-	-	-	-	-
3.5 t	-	-	-	-	-	-	2009224	-	-	-	-
4.5 t	-	-	-	-	-	-	-	2009225	-	-	-
6.7 t	-	-	-	-	-	-	-	-	2009226	-	-
8 t	-	-	-	-	-	-	-	-	-	2009227	-
10 t	-	-	2009228	-	-	-	-	-	-	-	-
15 t	-	-	-	-	2009258	-	-	-	-	-	-
20 t	-	-	-	-	-	-	-	-	-	-	2009259

- Norms EN 1677-1 ISO 12100
- Main Material Steel
- Colour Pink
- Temperature Range -40°C bis +100°C
- Packaging Unit (PU) Content 1

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United
Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

**SpanSet
Certified
Safety**