


Ligação direta do gancho e bloqueio automático

Ganchos de elevação de 1,5 t a 10 t

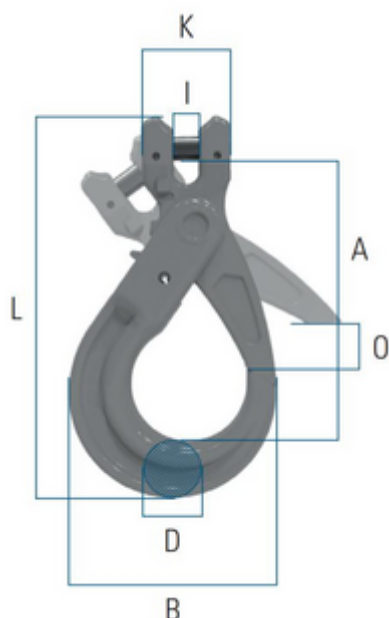

Nome curto do item	CMU [kg]	Diâmetro da corrente	CMU [t]	A [mm]	B [mm]	D [mm]	I [mm]
CSLH-6-10	1400	6 mm	1.4	94	70	20	7.5
CSLH-8-10	2500	8 mm	2.5	118	90	26	9.5
CSLH-10-10	4000	10 mm	4	140	109	30	12
CSLH-13-10	6700	13 mm	6.7	177	138.5	40.5	15
CSLH-16-10	10000	16 mm	10	220	170.5	50.5	17.5
CSLH-20-10	16000	20 mm	16	-	-	-	-

Nome curto do item	K [mm]	L [mm]	O [mm]	Peso líquido [kg]
CSLH-6-10	32	131	28	0.5
CSLH-8-10	36	166	35.5	0.9
CSLH-10-10	46	196.5	45	1.6
CSLH-13-10	59	251	53.5	2.9
CSLH-16-10	70	303	62	5.8
CSLH-20-10	-	-	-	-



NÚMEROS DE ORDEM[Global Item Number/Local ERP Number SSES]

Diâmetro da corrente	CSLH-6-10	CSLH-8-10	CSLH-10-10	CSLH-13-10	CSLH-16-10	CSLH-20-10
6 mm	2021374 C11CSLH00601406	-	-	-	-	-
8 mm	-	2021375 C11CSLH00801406	-	-	-	-
10 mm	-	-	2021376 C11CSLH01001406	-	-	-
13 mm	-	-	-	2021377 C11CSLH01301406	-	-
16 mm	-	-	-	-	2021378 C11CSLH01601406	-
20 mm	-	-	-	-	-	2032387 C11CSLH01001406

■ Normas	EN 1677
■ Grau	100
■ Material principal	Aço
■ Cor	Azul
■ Gama de temperaturas	-40°C / 200°C
■ Gama de temperaturas	-40°F / 120°F
■ Unidade de embalagem (PU) Contém	1

