




## Load Ring Weldable

A protected spring holds the suspension bracket in any position

| Item Name short | WLL kg Angle 0° [kg] | WLL t Angle 0° [t] | WLL kg Angle 90° [kg] | WLL t Angle 90° [t] | A [mm] | B [mm] | C [mm] |
|-----------------|----------------------|--------------------|-----------------------|---------------------|--------|--------|--------|
| XOW1,5N         | 1500                 | 1.5                | 1500                  | 1.5                 | 14     | 65     | 38     |
| XOW2,5N         | 2500                 | 2.5                | 2500                  | 2.5                 | 16     | 75     | 45     |
| XOW4N           | 4000                 | 4                  | 4000                  | 4                   | 18     | 84     | 51     |
| XOW6,7N         | 6700                 | 6.7                | 6700                  | 6.7                 | 24     | 117    | 67.3   |
| XOW10N          | 10000                | 10                 | 10000                 | 10                  | 31     | 126    | 67     |
| XOW16N          | 16000                | 16                 | 16000                 | 16                  | 45     | 174    | 100    |

| Item Name short | D [mm] | E [mm] | F [mm] | G [mm] | H [mm] | Weight Net [kg] |
|-----------------|--------|--------|--------|--------|--------|-----------------|
| XOW1,5N         | 25     | 66     | 16     | 31     | 79     | 0.39            |
| XOW2,5N         | 27     | 77     | 18     | 34.5   | 91     | 0.59            |
| XOW4N           | 32     | 87     | 20     | 40     | 102    | 0.87            |
| XOW6,7N         | 44     | 115    | 26     | 58.5   | 141    | 2.23            |
| XOW10N          | 55     | 129    | 28.5   | 70.5   | 157    | 3.33            |
| XOW16N          | 69     | 190    | 42     | 87     | 219    | 9.28            |

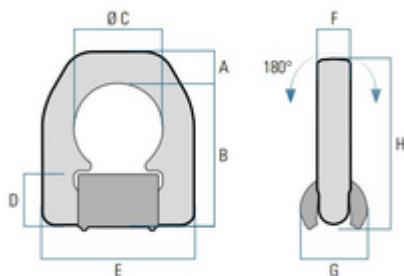

## ORDER NUMBERS

| WLL t Angle 0° | XOW1,5N | XOW2,5N | XOW4N   | XOW6,7N | XOW10N  | XOW16N  |
|----------------|---------|---------|---------|---------|---------|---------|
| 1.5 t          | 2016809 | -       | -       | -       | -       | -       |
| 2.5 t          | -       | 2016810 | -       | -       | -       | -       |
| 4 t            | -       | -       | 2016811 | -       | -       | -       |
| 6.7 t          | -       | -       | -       | 2016812 | -       | -       |
| 10 t           | -       | -       | -       | -       | 2016813 | -       |
| 16 t           | -       | -       | -       | -       | -       | 2016814 |

|                               |                    |
|-------------------------------|--------------------|
| ■ Norms                       | EN 1677            |
| ■ Grade                       | 100                |
| ■ Main Material               | Steel              |
| ■ Colour                      | Orange             |
| ■ Temperature Range           | -20° C to + 200° C |
| ■ Packaging Unit (PU) Content | 1                  |

