


### Maillon de jonction pour élingues textiles EXOSET® - GR80 - SpanSet

Maillon de connexion EXOSET® – Grade 80

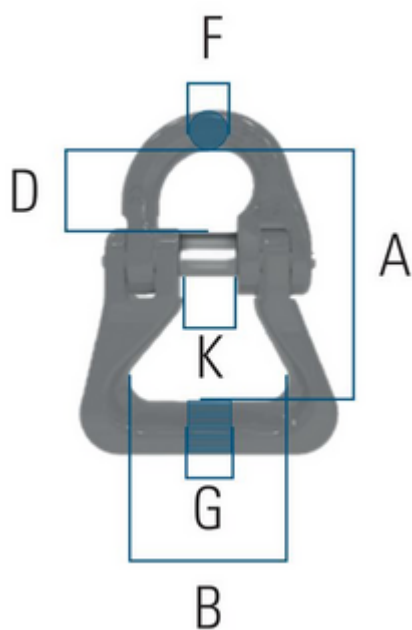

| Nom court de l'article | WLL<br>[kg] | WLL<br>[t] | A<br>[mm] | B<br>[mm] | D<br>[mm] | F<br>[mm] | G<br>[mm] |
|------------------------|-------------|------------|-----------|-----------|-----------|-----------|-----------|
| RSCL-8-8               | 2000        | 2          | 63        | 40        | 22        | 9         | 26        |
| RSCL-10-8              | 3150        | 3.15       | 76        | 57        | 26        | 12        | 30        |
| RSCL-13-8              | 5300        | 5.3        | 94        | 53        | 33        | 15        | 37        |
| RSCL-16-8              | 8000        | 8          | 114       | 67        | 40        | 19        | 44        |

| Nom court de l'article | K<br>[mm] | Poids net<br>[kg] |
|------------------------|-----------|-------------------|
| RSCL-8-8               | 18        | 0.30              |
| RSCL-10-8              | 24        | 0.60              |
| RSCL-13-8              | 29        | 1.10              |
| RSCL-16-8              | 35        | 1.90              |



### NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSFR]

| WLL    | RSCL-8-8 | RSCL-10-8 | RSCL-13-8 | RSCL-16-8 |
|--------|----------|-----------|-----------|-----------|
| 2 t    | 2002619  | -         | -         | -         |
| 3.15 t | -        | 2002620   | -         | -         |
| 5.3 t  | -        | -         | 2002621   | -         |
| 8 t    | -        | -         | -         | 2002622   |

|                                       |               |
|---------------------------------------|---------------|
| ■ Normes                              | EN 1677       |
| ■ Classe                              | 80            |
| ■ Matériel principal                  | Acier         |
| ■ Couleur                             | Bleu          |
| ■ Plage de température                | -40°C / 200°C |
| ■ Plage de température                | -40°F / 120°F |
| ■ Contenu des unités d'emballage (UE) | 1             |

