


Manilha reta com pino e porca

Dupla segurança que impede o desaparafusamento accidental do pino



Nome curto do item	CMU [kg]	CMU [t]	A [mm]	B [mm]	C [mm]	E [mm]
G4-7-005	500	0.5	22	8	6	13
G4-7-007	750	0.75	26	10	8	14
G4-7-010	1000	1	32	11	10	17
G4-7-015	1500	1.5	36.5	13	11	18
G4-7-020	2000	2	41.5	16	13	21
G4-7-032	3250	3.25	51	19	16	27
G4-7-047	4750	4.75	60.5	22	19	32
G4-7-065	6500	6.5	71.5	25	22	37
G4-7-085	8500	8.5	81	28	25	43
G4-7-095	9500	9.5	90	32	28	46
G4-7-120	12000	12	100	35	32	51
G4-7-135	13500	13.5	111	38	35	57
G4-7-170	17000	17	122	41	38	60
G4-7-250	25000	25	146	50	45	73
G4-7-350	35000	35	172	57	50	83
G4-7-550	55000	55	203	70	65	105

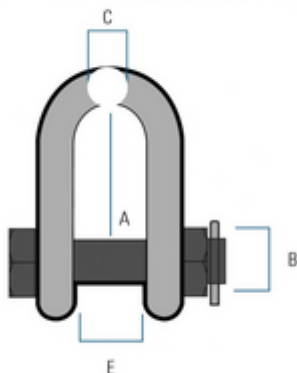

NÚMEROS DE ORDEM[Global Item Number/Local ERP Number SSES]

CMU	G4-7-005	G4-7-007	G4-7-010	G4-7-015	G4-7-020	G4-7-032	G4-7-047	G4-7-065	G4-7-085	G4-7-0
0.5 t	2025818 G4-7-005	-	-	-	-	-	-	-	-	-
0.75 t	-	2025819 C83G4700080750X	-	-	-	-	-	-	-	-
1 t	-	-	2025820 G4-7-010	-	-	-	-	-	-	-
1.5 t	-	-	-	2025821 G4-7-015	-	-	-	-	-	-
2 t	-	-	-	-	2025822 C83G4700160200X	-	-	-	-	-
3.25 t	-	-	-	-	-	2025823 C83G4700190320X	-	-	-	-
4.75 t	-	-	-	-	-	-	2025824 C83G4700220470X	-	-	-
6.5 t	-	-	-	-	-	-	-	2025825 C83G4700250650X	-	-
8.5 t	-	-	-	-	-	-	-	-	2025826 C83G4700280850X	-
9.5 t	-	-	-	-	-	-	-	-	-	2025827 C83G4700310000X
12 t	-	-	-	-	-	-	-	-	-	-
13.5 t	-	-	-	-	-	-	-	-	-	-
17 t	-	-	-	-	-	-	-	-	-	-
25 t	-	-	-	-	-	-	-	-	-	-
35 t	-	-	-	-	-	-	-	-	-	-
55 t	-	-	-	-	-	-	-	-	-	-

CMU	G4-7-135	G4-7-170	G4-7-250	G4-7-350	G4-7-550
0.5 t	-	-	-	-	-
0.75 t	-	-	-	-	-
1 t	-	-	-	-	-
1.5 t	-	-	-	-	-
2 t	-	-	-	-	-
3.25 t	-	-	-	-	-
4.75 t	-	-	-	-	-
6.5 t	-	-	-	-	-



CMU	G4-7-135	G4-7-170	G4-7-250	G4-7-350	G4-7-550
8.5 t	-	-	-	-	-
9.5 t	-	-	-	-	-
12 t	-	-	-	-	-
13.5 t	2025829 C83G4700381350X	-	-	-	-
17 t	-	2025830 G4-7-170	-	-	-
25 t	-	-	2025831 C83G4700502500X	-	-
35 t	-	-	-	2025832 G4-7-350	-
55 t	-	-	-	-	2025833 G4-7-550

- Normas EN 13889
- Material principal Aço
- Cor Cinza
- Gama de temperaturas -20 °C to + 200 °C
- Unidade de embalagem (PU) Contém 1

