


Manille droite avec goupille et écrou

Double sécurité empêchant le dévissage accidentel de la goupille



Nom court de l'article	WLL [kg]	WLL [t]	A [mm]	B [mm]	C [mm]	E [mm]
G4-7-005	500	0.5	22	8	6	13
G4-7-007	750	0.75	26	10	8	14
G4-7-010	1000	1	32	11	10	17
G4-7-015	1500	1.5	36.5	13	11	18
G4-7-020	2000	2	41.5	16	13	21
G4-7-032	3250	3.25	51	19	16	27
G4-7-047	4750	4.75	60.5	22	19	32
G4-7-065	6500	6.5	71.5	25	22	37
G4-7-085	8500	8.5	81	28	25	43
G4-7-095	9500	9.5	90	32	28	46
G4-7-120	12000	12	100	35	32	51
G4-7-135	13500	13.5	111	38	35	57
G4-7-170	17000	17	122	41	38	60
G4-7-250	25000	25	146	50	45	73
G4-7-350	35000	35	172	57	50	83
G4-7-550	55000	55	203	70	65	105

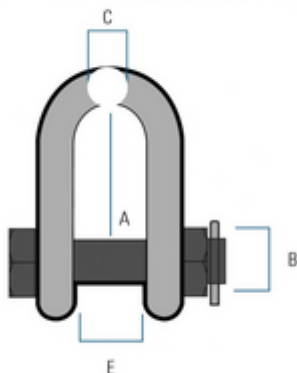

NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSFR]

WLL	G4-7-005	G4-7-007	G4-7-010	G4-7-015	G4-7-020	G4-7-032	G4-7-047	G4-7-065	G4-7-085	G4-7-095	G4-7-120
0.5 t	2025818	-	-	-	-	-	-	-	-	-	-
0.75 t	-	2025819	-	-	-	-	-	-	-	-	-
1 t	-	-	2025820	-	-	-	-	-	-	-	-
1.5 t	-	-	-	2025821	-	-	-	-	-	-	-
2 t	-	-	-	-	2025822	-	-	-	-	-	-
3.25 t	-	-	-	-	-	2025823	-	-	-	-	-
4.75 t	-	-	-	-	-	-	2025824	-	-	-	-
6.5 t	-	-	-	-	-	-	-	2025825	-	-	-
8.5 t	-	-	-	-	-	-	-	-	2025826	-	-
9.5 t	-	-	-	-	-	-	-	-	-	2025827	-
12 t	-	-	-	-	-	-	-	-	-	-	2025828
13.5 t	-	-	-	-	-	-	-	-	-	-	-
17 t	-	-	-	-	-	-	-	-	-	-	-
25 t	-	-	-	-	-	-	-	-	-	-	-
35 t	-	-	-	-	-	-	-	-	-	-	-
55 t	-	-	-	-	-	-	-	-	-	-	-

WLL	G4-7-135	G4-7-170	G4-7-250	G4-7-350	G4-7-550
0.5 t	-	-	-	-	-
0.75 t	-	-	-	-	-
1 t	-	-	-	-	-
1.5 t	-	-	-	-	-
2 t	-	-	-	-	-
3.25 t	-	-	-	-	-
4.75 t	-	-	-	-	-
6.5 t	-	-	-	-	-
8.5 t	-	-	-	-	-
9.5 t	-	-	-	-	-
12 t	-	-	-	-	-
13.5 t	2025829	-	-	-	-
17 t	-	2025830	-	-	-
25 t	-	-	2025831	-	-
35 t	-	-	-	2025832	-



WLL	G4-7-135	G4-7-170	G4-7-250	G4-7-350	G4-7-550
55 t	-	-	-	-	2025833

- Normes EN 13889
- Matériel principal Acier
- Couleur Gris
- Plage de température -20 °C to + 200 °C
- Contenu des unités d'emballage (UE) 1

