



MaXafe 55mm

5000daN to 10000daN Lashing capacity webbing lashing strap, ideal for transverse and diagonal lashing of heavy vehicles and machines

Item Name short	Lashing Type	Lashing Capacity [daN]	L1 [m]	Lashing End Fitting Component	Weight Net [kg]
MaXafe LC5000/55 2pc 3m DJHS	Two-piece	5000	3	DJHS-50	4.50
MaXafe LC5000/55 2pc 3m DH	Two-piece	5000	3	DH-50	6.50
MaXafe LC5000/55 2pc 4m DJHS	Two-piece	5000	4	DJHS-50	4.70
MaXafe LC5000/55 2pc 4m DH	Two-piece	5000	4	DH-50	6.70
MaXafe LC10000/55 3m carlash DH	Carlash	10000	3	DH-50	10.30
MaXafe LC10000/55 4m carlash DH	Carlash	10000	4	DH-50	10.60

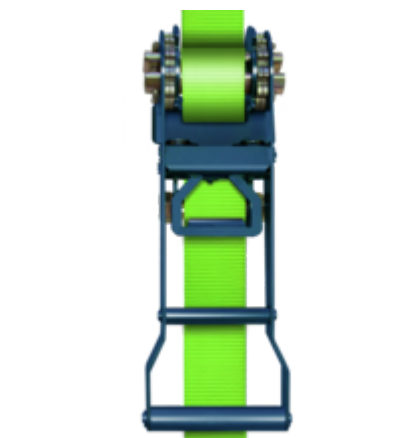

ORDER NUMBERS[Global Item Number/Local ERP Number SSAU]

Lashing Capacity	Lashing End Fitting Component	3 m	4 m
5000 daN	 DJHS-50	2005985	2005986
5000 daN	 DH-50	2005988	2005989
10000 daN	 DH-50	2005991	2005992

■ Surface Coating	Epoxy
■ Webbing Material	High-performance webbing low expansion <2 %
■ Colour	Green
■ Webbing Width B	55 mm
■ Anti Belt Slip (ABS)	No
■ Tension Force Indicator (TFI)	No
■ Label Protection	Yes
■ Handle Type	Long Wide

SpanSet Australia Ltd
150 Old Bathurst Road
Emu Plains NSW 2750
Australia
+61 (02) 4735 3955
sales@spanset.com.au
www.spanset.com.au



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Australia Ltd

**SpanSet
Certified
Safety**

