


Ogniwo przegubowe do przyspawania

Możliwość załadunku ze wszystkich stron, łatwy i prosty montaż spawany

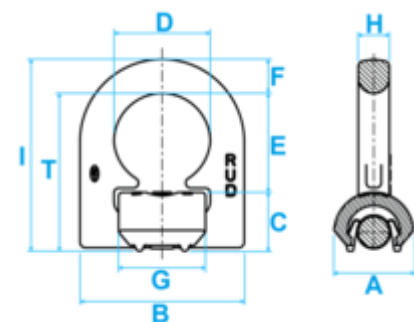

Pozycja skrótowa	WLL kg 0 [kg]	Kąt 0 [°]	WLL t 0 [t]	Kąt 90° [°]	WLL kg 90° [kg]	WLL t 90° [t]	A [mm]	B [mm]	C [mm]
VLBS 1.5	1500		1.5		1500		33	66	25
VLBS 2.5	2500		2.5		2500		36	77	27
VLBS 4	4000		4		4000		42	87	31
VLBS 6.7	6700		6.7		6700		61	115	44
VLBS 10	10000		10		10000		75	129	55
VLBS 16 OF	16000		16		16000		96	190	69

Pozycja Nazwa skrótowa	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	T [mm]
VLBS 1.5	38	40	14	33	14	79	65
VLBS 2.5	45	48	16	40	14	91	75
VLBS 4	51	52	18	46	16	101	83
VLBS 6.7	67	73	24	60	22	141	117
VLBS 10	67	71	26.5	60	26	152.5	126
VLBS 16 OF	100	105	40	90	26	214	174

Pozycja Nazwa skrótowa	Waga netto [kg]
VLBS 1.5	0.35
VLBS 2.5	0.48
VLBS 4	0.76
VLBS 6.7	1.9
VLBS 10	2.9
VLBS 16 OF	6.8



NUMERY ZAMÓWIEŃ[Global Item Number/Local ERP Number SSPL]

WLL kg Kąt 0	VLBS 1.5	VLBS 2.5	VLBS 4	VLBS 6.7	VLBS 10	VLBS 16 OF
1500 kg	2009235 3172	-	-	-	-	-
2500 kg	-	2009253 6052	-	-	-	-
4000 kg	-	-	2009254 3174	-	-	-
6700 kg	-	-	-	2009255 3175	-	-
10000 kg	-	-	-	-	2009256 7510	-
16000 kg	-	-	-	-	-	2009257 3173

- Standardy EN 1677-1 ISO 12100
- Główny materiał Stal
- Kolor Różowy
- Zakres temperatur -20° C to + 200° C
- Jednostka opakowania (PU) Zawartość 1

