


Polar Bow Shackle BN

G-5163 | Grade 8 bow shackle with safety bolt for use under low temperatures

Item Name short	WLL t [t]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
POGHMB13	2	13.5 - 16	-	34	13	22	51
POGHMB16	3.25	16	19	40	16	27	64
POGHMB19	4.75	19	22	46	19	31	76
POGHMB22	6.5	22	25	52	22	36	83
POGHMB25	8.5	25	28	59	25	43	95
POGHMB28	9.5	28	32	67	28	47	108
POGHMB32	12	32	35	73	32	51	115
POGHMB35	13.5	35	38	79	35	57	133
POGHMB38	17	38	42	88	38	60	146
POGHMB45	25	45	50	104	45	74	187
POGHMB50	35	50	57	112	50	83	197
POGHMB57	35	50	57	112	50	83	197

Item Name short	H [mm]	Weight Net [kg]
POGHMB13	90	0.42
POGHMB16	110	0.74
POGHMB19	129	1.18
POGHMB22	144	1.77
POGHMB25	164	2.58
POGHMB28	186	3.66
POGHMB32	201	4.91
POGHMB35	227	-
POGHMB38	249	8.19
POGHMB45	300	-
POGHMB50	332	-
POGHMB57	332	19.9

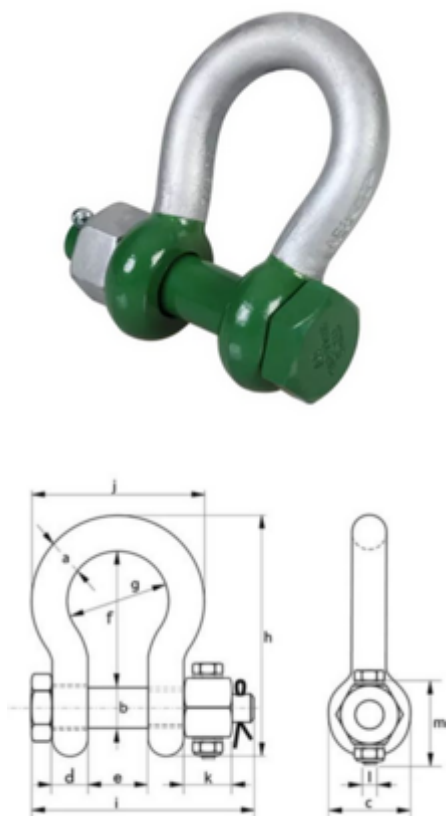

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

WLL t	POGHMB13	POGHMB16	POGHMB19	POGHMB22	POGHMB25	POGHMB28	POGHMB32	POGHMB35	POGHMB38	POGHMB45	POGHMB50
2 t	2032788	-	-	-	-	-	-	-	-	-	-
3.25 t	-	2032789	-	-	-	-	-	-	-	-	-
4.75 t	-	-	2032790	-	-	-	-	-	-	-	-
6.5 t	-	-	-	2032791	-	-	-	-	-	-	-
8.5 t	-	-	-	-	2032792	-	-	-	-	-	-
9.5 t	-	-	-	-	-	2032793	-	-	-	-	-
12 t	-	-	-	-	-	-	2032794	-	-	-	-
13.5 t	-	-	-	-	-	-	-	2032795	-	-	-
17 t	-	-	-	-	-	-	-	-	2032796	-	-
25 t	-	-	-	-	-	-	-	-	-	2032797	-
35 t	-	-	-	-	-	-	-	-	-	-	2032798

WLL t	POGHMB57
2 t	-
3.25 t	-
4.75 t	-
6.5 t	-
8.5 t	-
9.5 t	-
12 t	-
13.5 t	-
17 t	-
25 t	-
35 t	2032799

■ Packaging Unit (PU) Content 1

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
info@spanset.nl
www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
 Certified
 Safety**