



PowerForce

High cut and wear resistance for extreme durability, they handle sharp edges ($\geq 2\text{mm}$) without extra protection, ensuring safety and longevity


Item Name short	WLL kg [kg]	WLL t [t]	L1 [m]	L1 min. [m]	Webbing Width B [mm]	Weight for 1m [kg]	Weight Net [kg]
PowerForce 1ply 1000 2m	1000	1	2	1	40	0.18	0.36
PowerForce 1ply 1000 3m	1000	1	3	1	40	0.18	0.44
PowerForce 1ply 1000 4m	1000	1	4	1	40	0.18	0.52
PowerForce 1ply 1000 5m	1000	1	5	1	40	0.18	0.6
PowerForce 1ply 1000 6m	1000	1	6	1	40	0.18	0.68
PowerForce 1ply 1000 8m	1000	1	8	1	40	0.18	0.84
PowerForce 1ply 2000 2m	2000	2	2	1.2	80	0.36	0.72
PowerForce 1ply 2000 3m	2000	2	3	1.2	80	0.36	0.88
PowerForce 1ply 2000 4m	2000	2	4	1.2	80	0.36	1.04
PowerForce 1ply 2000 5m	2000	2	5	1.2	80	0.36	1.2
PowerForce 1ply 2000 6m	2000	2	6	1.2	80	0.36	1.36
PowerForce 1ply 2000 8m	2000	2	8	1.2	80	0.36	1.68
PowerForce 1ply 3000 2m	3000	3	2	1.5	120	0.59	1.18
PowerForce 1ply 3000 3m	3000	3	3	1.5	120	0.59	1.42
PowerForce 1ply 3000 4m	3000	3	4	1.5	120	0.59	1.66
PowerForce 1ply 3000 5m	3000	3	5	1.5	120	0.59	1.9
PowerForce 1ply 3000 6m	3000	3	6	1.5	120	0.59	2.14
PowerForce 1ply 3000 8m	3000	3	8	1.5	120	0.59	2.62

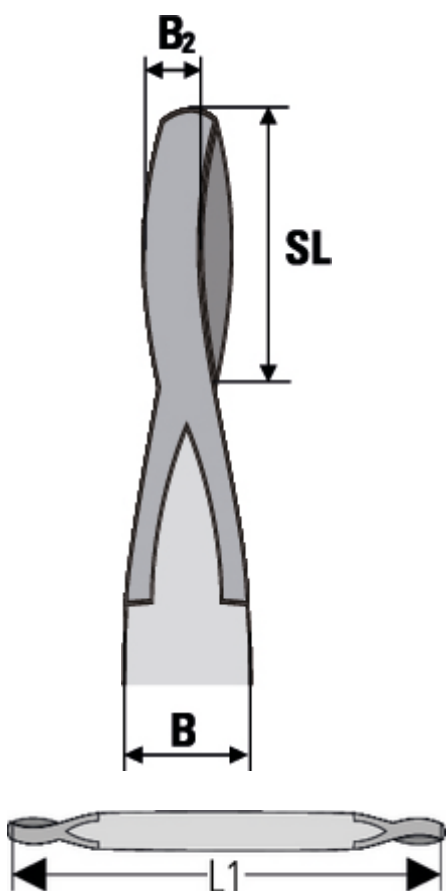

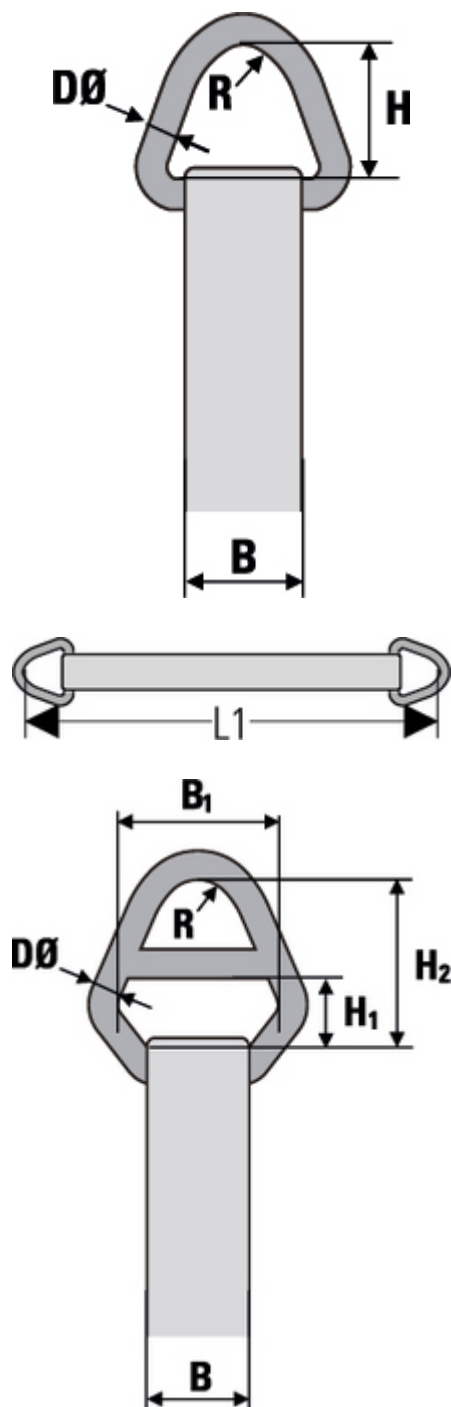

Item Name short	Weight per Meter [kg/m]	Colour
PowerForce 1ply 1000 2m	0.08	Purple
PowerForce 1ply 1000 3m	0.08	Purple
PowerForce 1ply 1000 4m	0.08	Purple
PowerForce 1ply 1000 5m	0.08	Purple
PowerForce 1ply 1000 6m	0.08	Purple
PowerForce 1ply 1000 8m	0.08	Purple
PowerForce 1ply 2000 2m	0.16	Green
PowerForce 1ply 2000 3m	0.16	Green
PowerForce 1ply 2000 4m	0.16	Green
PowerForce 1ply 2000 5m	0.16	Green
PowerForce 1ply 2000 6m	0.16	Green
PowerForce 1ply 2000 8m	0.16	Green
PowerForce 1ply 3000 2m	0.24	Yellow
PowerForce 1ply 3000 3m	0.24	Yellow
PowerForce 1ply 3000 4m	0.24	Yellow
PowerForce 1ply 3000 5m	0.24	Yellow
PowerForce 1ply 3000 6m	0.24	Yellow
PowerForce 1ply 3000 8m	0.24	Yellow



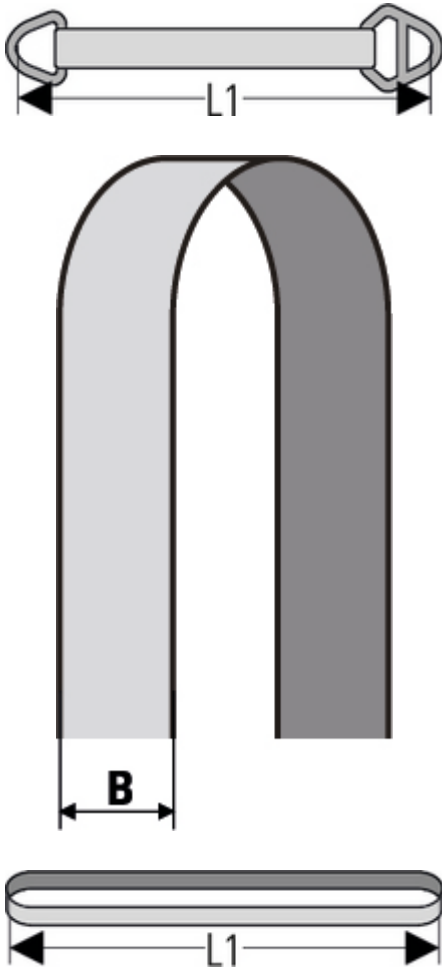

ORDER NUMBERS[Global Item Number/Local ERP Number SSDE]

Dimension L1	1000 kg	2000 kg	3000 kg
2 m	2002972 D076995	2002973 D077000	2002974 D077005
3 m	2003442 D076996	2003444 D077001	2003446 D077006
4 m	2003443 D076997	2003445 D077002	2003447 D077007
5 m	2003937 D076998	2003940 D077003	2003943 D077008
6 m	2003938 D076999	2003941 D077004	2003944 D077009
8 m	2003939 D077341	2003942 D077342	2003945 D077343

**SpanSet GmbH & Co.
KG**
Jülicher Straße 49-51
52531 Übach-
Palenberg
Deutschland
+49 (0) 2451 4831-0
info@spanset.de
www.spanset.com



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written authorisation of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. DB040719 © SpanSet GmbH & Co. KG - Germany

**SpanSet
Certified
Safety**

■ Norms	EN 1492-1
■ Main Material	High molecular weight polyethylene (HMPE)
■ Webbing Thickness	3 mm
■ Temperature Range	-40°C bis +60°C
■ Label Protection	Yes
■ Packaging Unit (PU) Content	1

