



PowerForce

High cut and wear resistance for extreme durability, they handle sharp edges ($\geq 2\text{mm}$) without extra protection, ensuring safety and longevity


Item Name short	WLL kg [kg]	WLL t [t]	L1 [m]	L1 min. [m]	Webbing Width B [mm]	Weight for 1m [kg]	Weight Net [kg]
PowerForce 1ply 1000 2m	1000	1	2	1	40	0.18	0.36
PowerForce 1ply 1000 3m	1000	1	3	1	40	0.18	0.44
PowerForce 1ply 1000 4m	1000	1	4	1	40	0.18	0.52
PowerForce 1ply 1000 5m	1000	1	5	1	40	0.18	0.6
PowerForce 1ply 1000 6m	1000	1	6	1	40	0.18	0.68
PowerForce 1ply 1000 8m	1000	1	8	1	40	0.18	0.84
PowerForce 1ply 2000 2m	2000	2	2	1.2	80	0.36	0.72
PowerForce 1ply 2000 3m	2000	2	3	1.2	80	0.36	0.88
PowerForce 1ply 2000 4m	2000	2	4	1.2	80	0.36	1.04
PowerForce 1ply 2000 5m	2000	2	5	1.2	80	0.36	1.2
PowerForce 1ply 2000 6m	2000	2	6	1.2	80	0.36	1.36
PowerForce 1ply 2000 8m	2000	2	8	1.2	80	0.36	1.68
PowerForce 1ply 3000 2m	3000	3	2	1.5	120	0.59	1.18
PowerForce 1ply 3000 3m	3000	3	3	1.5	120	0.59	1.42
PowerForce 1ply 3000 4m	3000	3	4	1.5	120	0.59	1.66
PowerForce 1ply 3000 5m	3000	3	5	1.5	120	0.59	1.9
PowerForce 1ply 3000 6m	3000	3	6	1.5	120	0.59	2.14
PowerForce 1ply 3000 8m	3000	3	8	1.5	120	0.59	2.62

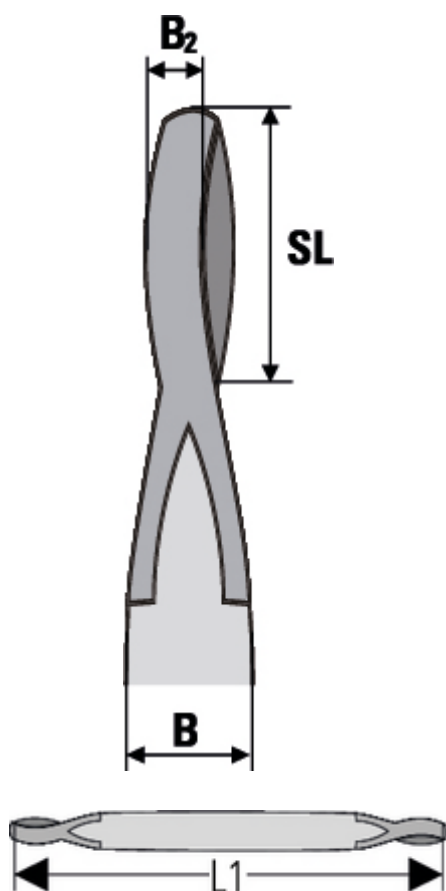

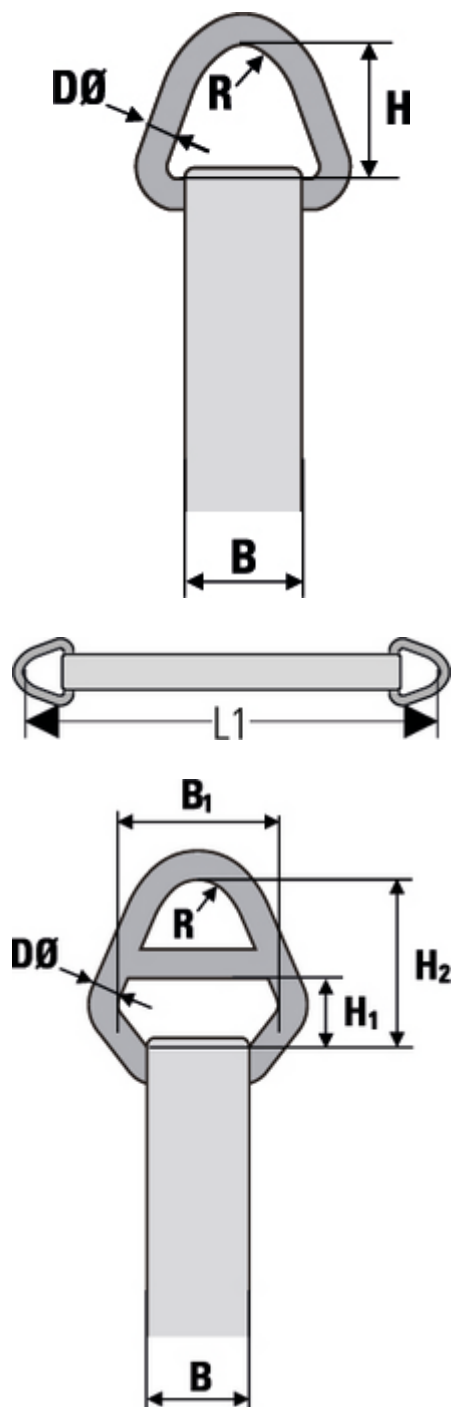

Item Name short	Weight per Meter [kg/m]	Colour
PowerForce 1ply 1000 2m	0.08	Purple
PowerForce 1ply 1000 3m	0.08	Purple
PowerForce 1ply 1000 4m	0.08	Purple
PowerForce 1ply 1000 5m	0.08	Purple
PowerForce 1ply 1000 6m	0.08	Purple
PowerForce 1ply 1000 8m	0.08	Purple
PowerForce 1ply 2000 2m	0.16	Green
PowerForce 1ply 2000 3m	0.16	Green
PowerForce 1ply 2000 4m	0.16	Green
PowerForce 1ply 2000 5m	0.16	Green
PowerForce 1ply 2000 6m	0.16	Green
PowerForce 1ply 2000 8m	0.16	Green
PowerForce 1ply 3000 2m	0.24	Yellow
PowerForce 1ply 3000 3m	0.24	Yellow
PowerForce 1ply 3000 4m	0.24	Yellow
PowerForce 1ply 3000 5m	0.24	Yellow
PowerForce 1ply 3000 6m	0.24	Yellow
PowerForce 1ply 3000 8m	0.24	Yellow



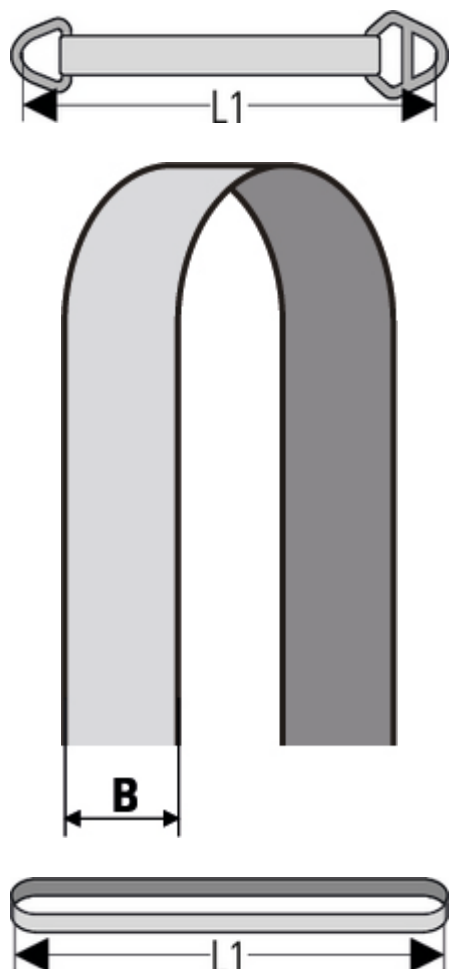

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

Dimension L1	1000 kg	2000 kg	3000 kg
2 m	2002972	2002973	2002974
3 m	2003442	2003444	2003446
4 m	2003443	2003445	2003447
5 m	2003937	2003940	2003943
6 m	2003938	2003941	2003944
8 m	2003939	2003942	2003945

■ Norms	EN 1492-1
■ Main Material	High molecular weight polyethylene (HMPE)
■ Webbing Thickness	3 mm
■ Temperature Range	-40°C bis +60°C

SpanSet Nederland B.V.
Plaza 10A 4782 SK
Moerdijk Nederland
Tel.: +31 (0) 168 38 68 00
info@spanset.nl
www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
Certified
Safety**

■ Label Protection	Yes
■ Packaging Unit (PU) Content	1

