


### PowerForce Endless


High cut and wear resistance for extreme durability ideal for construction and mechanical engineering

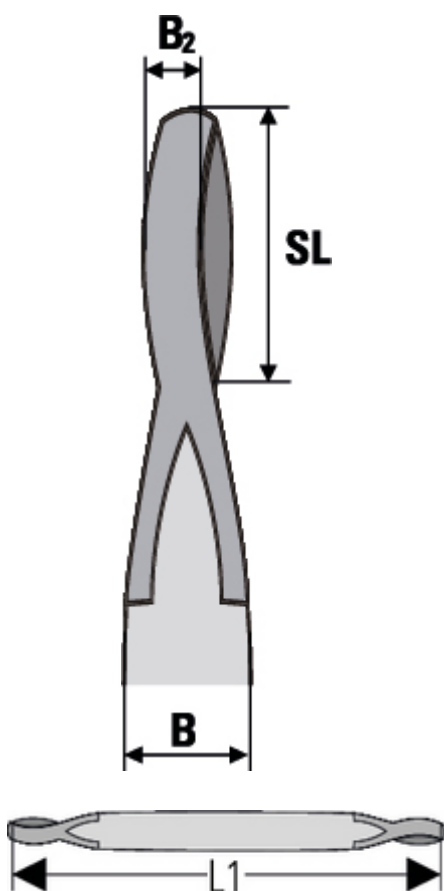

| Item Name short                      | WLL kg<br>[kg] | WLL t<br>[t] | L1<br>[m] | L1 min.<br>[m] | Webbing Width<br>B<br>[mm] | Weight for<br>1m<br>[kg] | Weight<br>Net<br>[kg] |
|--------------------------------------|----------------|--------------|-----------|----------------|----------------------------|--------------------------|-----------------------|
| PowerForce endless<br>1ply 2000 1m   | 2000           | 2            | 1         | 1.0            | 40                         | 0.24                     | 0.32                  |
| PowerForce endless<br>1ply 2000 1.5m | 2000           | 2            | 1.5       | 1.0            | 40                         | 0.24                     | 0.4                   |
| PowerForce endless<br>1ply 2000 2m   | 2000           | 2            | 2         | 1.0            | 40                         | 0.24                     | 0.48                  |
| PowerForce endless<br>1ply 2000 3m   | 2000           | 2            | 3         | 1.0            | 40                         | 0.24                     | 0.64                  |
| PowerForce endless<br>1ply 2000 4m   | 2000           | 2            | 4         | 1.0            | 40                         | 0.24                     | 0.8                   |
| PowerForce endless<br>1ply 2000 5m   | 2000           | 2            | 5         | 1.0            | 40                         | 0.24                     | 0.96                  |
| PowerForce endless<br>1ply 4000 1.5m | 4000           | 4            | 1.5       | 1.0            | 80                         | 0.39                     | 0.62                  |
| PowerForce endless<br>1ply 4000 2m   | 4000           | 4            | 2         | 1.0            | 80                         | 0.39                     | 0.78                  |
| PowerForce endless<br>1ply 4000 3m   | 4000           | 4            | 3         | 1.0            | 80                         | 0.39                     | 1.1                   |
| PowerForce endless<br>1ply 4000 4m   | 4000           | 4            | 4         | 1.0            | 80                         | 0.39                     | 1.42                  |
| PowerForce endless<br>1ply 4000 5m   | 4000           | 4            | 5         | 1.0            | 80                         | 0.39                     | 1.74                  |
| PowerForce endless<br>1ply 6000 1m   | 6000           | 6            | 1         | 1              | 120                        | 0.62                     | 0.76                  |
| PowerForce endless<br>1ply 6000 1.5m | 6000           | 6            | 1.5       | 1              | 120                        | 0.62                     | 1                     |
| PowerForce endless<br>1ply 6000 2m   | 6000           | 6            | 2         | 1              | 120                        | 0.62                     | 1.24                  |
| PowerForce endless<br>1ply 6000 3m   | 6000           | 6            | 3         | 1              | 120                        | 0.62                     | 1.72                  |
| PowerForce endless<br>1ply 6000 4m   | 6000           | 6            | 4         | 1              | 120                        | 0.62                     | 2.2                   |
| PowerForce endless<br>1ply 6000 5m   | 6000           | 6            | 5         | 1              | 120                        | 0.62                     | 2.68                  |


| Item Name short                 | Weight per Meter<br>[kg/m] |
|---------------------------------|----------------------------|
| PowerForce endless 1ply 2000 1m | 0.16                       |



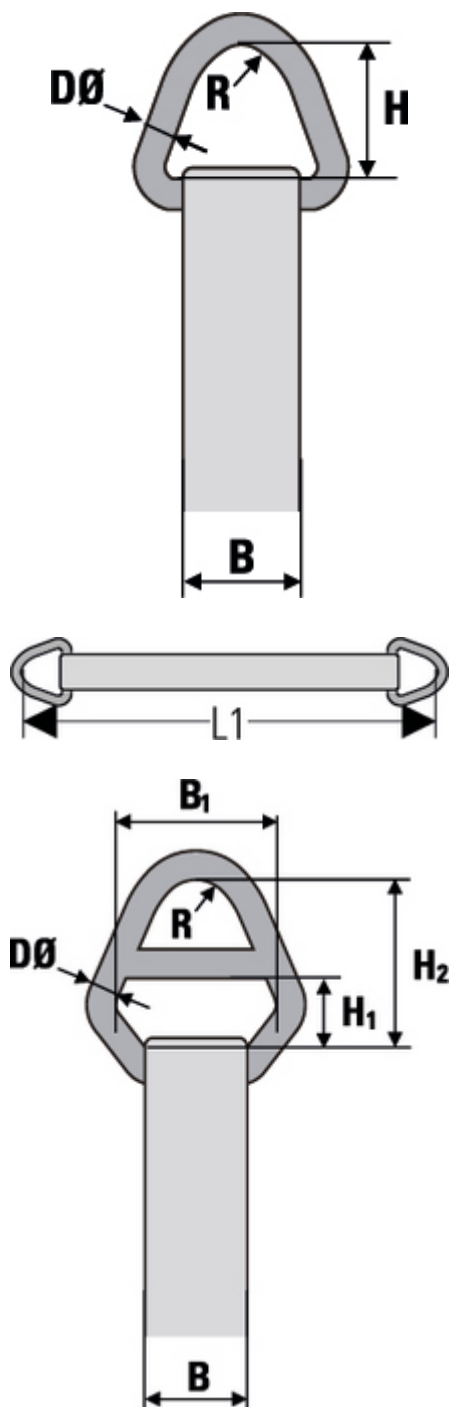

| Item Name short                   | Weight per Meter<br>[kg/m] |
|-----------------------------------|----------------------------|
| PowerForce endless 1ply 2000 1.5m | 0.16                       |
| PowerForce endless 1ply 2000 2m   | 0.16                       |
| PowerForce endless 1ply 2000 3m   | 0.16                       |
| PowerForce endless 1ply 2000 4m   | 0.16                       |
| PowerForce endless 1ply 2000 5m   | 0.16                       |
| PowerForce endless 1ply 4000 1.5m | 0.32                       |
| PowerForce endless 1ply 4000 2m   | 0.32                       |
| PowerForce endless 1ply 4000 3m   | 0.32                       |
| PowerForce endless 1ply 4000 4m   | 0.32                       |
| PowerForce endless 1ply 4000 5m   | 0.32                       |
| PowerForce endless 1ply 6000 1m   | 0.48                       |
| PowerForce endless 1ply 6000 1.5m | 0.48                       |
| PowerForce endless 1ply 6000 2m   | 0.48                       |
| PowerForce endless 1ply 6000 3m   | 0.48                       |
| PowerForce endless 1ply 6000 4m   | 0.48                       |
| PowerForce endless 1ply 6000 5m   | 0.48                       |



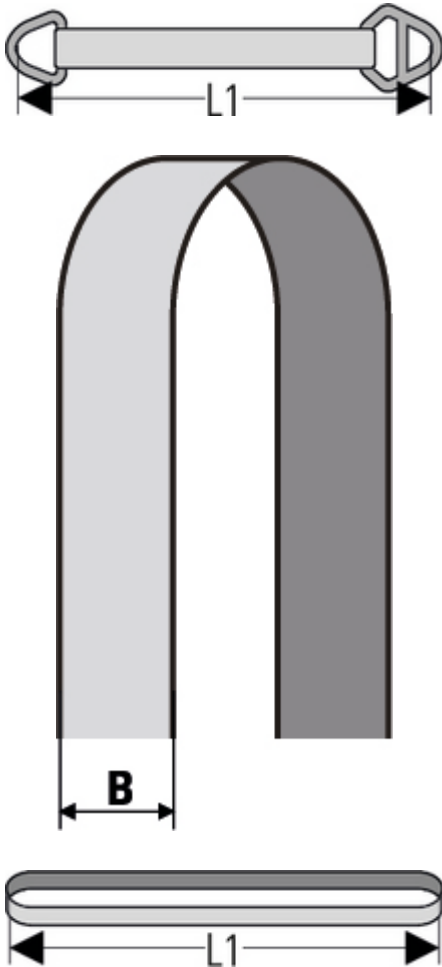

### ORDER NUMBERS[Global Item Number/Local ERP Number SSDE]

| Dimension L1 | 2000 kg            | 4000 kg            | 6000 kg            |
|--------------|--------------------|--------------------|--------------------|
| 1 m          | 2020089<br>D077677 | -                  | 2008326<br>D077688 |
| 1.5 m        | 2020096<br>D077632 | 2024797<br>D077683 | 2008333<br>D077689 |
| 2 m          | 2020087<br>D077678 | 2024796<br>D077684 | 2008318<br>D077690 |
| 3 m          | 2020088<br>D077679 | 2024798<br>D077685 | 2008325<br>D077691 |
| 4 m          | 2020097<br>D077680 | 2024799<br>D077686 | 2008334<br>D077692 |
| 5 m          | 2020098<br>D077681 | 2024800<br>D077687 | 2008335<br>D077694 |

**SpanSet GmbH & Co.  
KG**  
Jülicher Straße 49-51  
52531 Übach-  
Palenberg  
Deutschland  
+49 (0) 2451 4831-0  
info@spanset.de  
www.spanset.com



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written authorisation of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. DB040719 © SpanSet GmbH & Co. KG - Germany

**SpanSet  
Certified  
Safety**

|                                      |                                           |
|--------------------------------------|-------------------------------------------|
| ■ <b>Main Material</b>               | High molecular weight polyethylene (HMPE) |
| ■ <b>Webbing Thickness</b>           | 3 mm                                      |
| ■ <b>Temperature Range</b>           | -40°C bis +60°C                           |
| ■ <b>Label Protection</b>            | Yes                                       |
| ■ <b>Packaging Unit (PU) Content</b> | 1                                         |

