



PowerForce with D1 and D2 Links

Perfect configuration for choked lifting applications, PowerForce lifting straps deliver superior cut and wear resistance.


Item Name short	WLL kg [kg]	WLL t [t]	L1 [m]	Webbing Width B [mm]	Weight for 1m [kg]	Weight Net [kg]	Weight per Meter [kg/m]
PowerForce 1ply D1D2 1000 2m	1000	1	2	40	0.93	1.86	0.08
PowerForce 1ply D1D2 1000 3m	1000	1	3	40	0.93	1.94	0.08
PowerForce 1ply D1D2 1000 4m	1000	1	4	40	0.93	2.02	0.08
PowerForce 1ply D1D2 1000 5m	1000	1	5	40	0.93	2.1	0.08
PowerForce 1ply D1D2 1000 6m	1000	1	6	40	0.93	2.18	0.08
PowerForce 1ply D1D2 1000 8m	1000	1	8	40	0.93	2.34	0.08
PowerForce 1ply D1D2 2000 2m	2000	2	2	80	1.59	3.18	0.16
PowerForce 1ply D1D2 2000 3m	2000	2	3	80	1.59	3.34	0.16
PowerForce 1ply D1D2 2000 4m	2000	2	4	80	1.59	3.5	0.16
PowerForce 1ply D1D2 2000 5m	2000	2	5	80	1.59	3.66	0.16
PowerForce 1ply D1D2 2000 6m	2000	2	6	80	1.59	3.82	0.16
PowerForce 1ply D1D2 2000 8m	2000	2	8	80	1.59	4.14	0.16
PowerForce 1ply D1D2 3000 2m	3000	3	2	120	2.43	4.86	0.24
PowerForce 1ply D1D2 3000 3m	3000	3	3	120	2.43	5.1	0.24
PowerForce 1ply D1D2 3000 4m	3000	3	4	120	2.43	5.34	0.24
PowerForce 1ply D1D2 3000 5m	3000	3	5	120	2.43	5.85	0.24
PowerForce 1ply D1D2 3000 6m	3000	3	6	120	2.43	5.82	0.24
PowerForce 1ply D1D2 3000 8m	3000	3	8	120	2.43	6.3	0.24

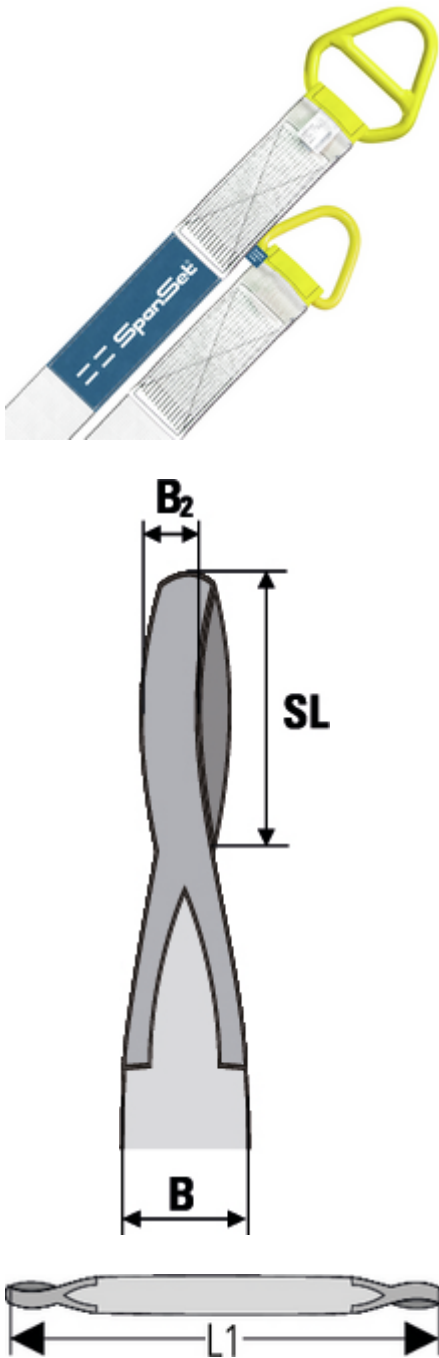

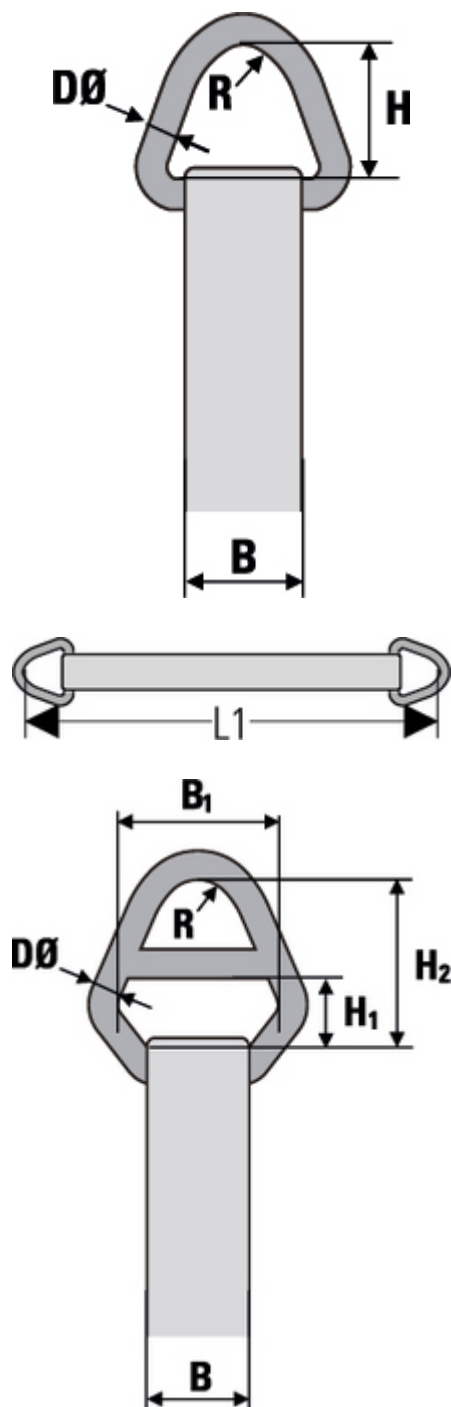

Item Name short	Colour
PowerForce 1ply D1D2 1000 2m	Purple
PowerForce 1ply D1D2 1000 3m	Purple
PowerForce 1ply D1D2 1000 4m	Purple
PowerForce 1ply D1D2 1000 5m	Purple
PowerForce 1ply D1D2 1000 6m	Purple
PowerForce 1ply D1D2 1000 8m	Purple
PowerForce 1ply D1D2 2000 2m	Green
PowerForce 1ply D1D2 2000 3m	Green
PowerForce 1ply D1D2 2000 4m	Green
PowerForce 1ply D1D2 2000 5m	Green
PowerForce 1ply D1D2 2000 6m	Green
PowerForce 1ply D1D2 2000 8m	Green
PowerForce 1ply D1D2 3000 2m	Yellow
PowerForce 1ply D1D2 3000 3m	Yellow
PowerForce 1ply D1D2 3000 4m	Yellow
PowerForce 1ply D1D2 3000 5m	Yellow
PowerForce 1ply D1D2 3000 6m	Yellow
PowerForce 1ply D1D2 3000 8m	Yellow



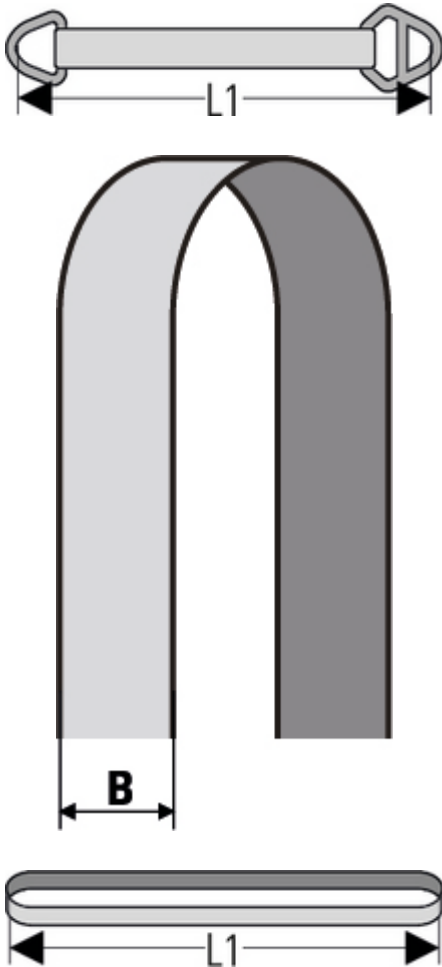

ORDER NUMBERS[Global Item Number/Local ERP Number SSDE]

Dimension L1	1000 kg	2000 kg	3000 kg
2 m	2020090 D077290	2008327 D077300	2025142 D077310
3 m	2020091 D077291	2008328 D077301	2024795 D077311
4 m	2020092 D077292	2008329 D077302	2025143 D077312
5 m	2020093 D077293	2008330 D077303	2025144 D077313
6 m	2020094 D077294	2008331 D077304	2025145 D077314
8 m	2020095	2008332	2025146

**SpanSet GmbH & Co.
KG**
Jülicher Straße 49-51
52531 Übach-
Palenberg
Deutschland
+49 (0) 2451 4831-0
info@spanset.de
www.spanset.com



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written authorisation of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. DB040719 © SpanSet GmbH & Co. KG - Germany

**SpanSet
Certified
Safety**

■ Main Material	High molecular weight polyethylene (HMPE)
■ Webbing Thickness	3 mm
■ Temperature Range	-40°C bis +60°C
■ Label Protection	Yes
■ Packaging Unit (PU) Content	1

