



PowerForce with D1 Links

Ideal for construction & mechanical engineering, they handle sharp edges ($\geq 2\text{mm}$) without extra protection, ensuring safety and longevity


Item Name short	WLL kg [kg]	WLL t [t]	L1 [m]	Webbing Width B [mm]	Weight for 1m [kg]	Weight Net [kg]	Weight per Meter [kg/m]
PowerForce 1ply D1D1 1000 2m	1000	1	2	40	0.57	1.14	0.08
PowerForce 1ply D1D1 1000 3m	1000	1	3	40	0.57	1.22	0.08
PowerForce 1ply D1D1 1000 4m	1000	1	4	40	0.57	1.3	0.08
PowerForce 1ply D1D1 1000 5m	1000	1	5	40	0.57	1.38	0.08
PowerForce 1ply D1D1 1000 6m	1000	1	6	40	0.57	1.46	0.08
PowerForce 1ply D1D1 1000 8m	1000	1	8	40	0.57	1.62	0.08
PowerForce 1ply D1D1 2000 2m	2000	2	2	80	0.93	1.86	0.16
PowerForce 1ply D1D1 2000 3m	2000	2	3	80	0.93	2.02	0.16
PowerForce 1ply D1D1 2000 4m	2000	2	4	80	0.93	2.18	0.16
PowerForce 1ply D1D1 2000 5m	2000	2	5	80	0.93	2.34	0.16
PowerForce 1ply D1D1 2000 6m	2000	2	6	80	0.93	2.5	0.16
PowerForce 1ply D1D1 2000 8m	2000	2	8	80	0.93	2.82	0.16
PowerForce 1ply D1D1 3000 2m	3000	3	2	120	1.58	3.16	0.24
PowerForce 1ply D1D1 3000 3m	3000	3	3	120	1.58	3.4	0.24
PowerForce 1ply D1D1 3000 4m	3000	3	4	120	1.58	3.64	0.24
PowerForce 1ply D1D1 3000 5m	3000	3	5	120	1.58	3.88	0.24
PowerForce 1ply D1D1 3000 6m	3000	3	6	120	1.58	4.12	0.24
PowerForce 1ply D1D1 3000 8m	3000	3	8	120	1.58	4.6	0.24

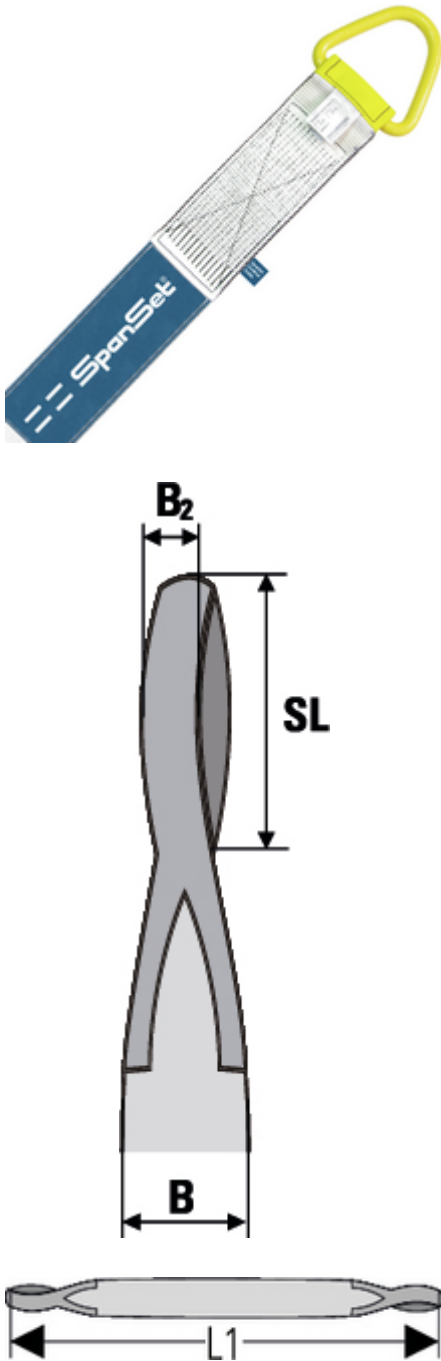

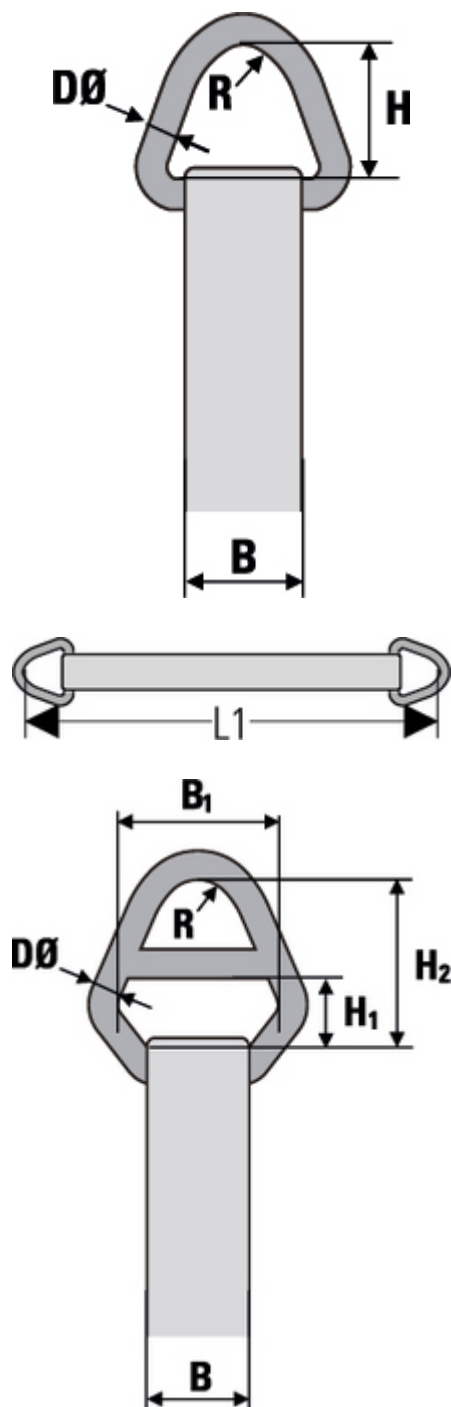

Item Name short	Colour
PowerForce 1ply D1D1 1000 2m	Purple
PowerForce 1ply D1D1 1000 3m	Purple
PowerForce 1ply D1D1 1000 4m	Purple
PowerForce 1ply D1D1 1000 5m	Purple
PowerForce 1ply D1D1 1000 6m	Purple
PowerForce 1ply D1D1 1000 8m	Purple
PowerForce 1ply D1D1 2000 2m	Green
PowerForce 1ply D1D1 2000 3m	Green
PowerForce 1ply D1D1 2000 4m	Green
PowerForce 1ply D1D1 2000 5m	Green
PowerForce 1ply D1D1 2000 6m	Green
PowerForce 1ply D1D1 2000 8m	Green
PowerForce 1ply D1D1 3000 2m	Yellow
PowerForce 1ply D1D1 3000 3m	Yellow
PowerForce 1ply D1D1 3000 4m	Yellow
PowerForce 1ply D1D1 3000 5m	Yellow
PowerForce 1ply D1D1 3000 6m	Yellow
PowerForce 1ply D1D1 3000 8m	Yellow



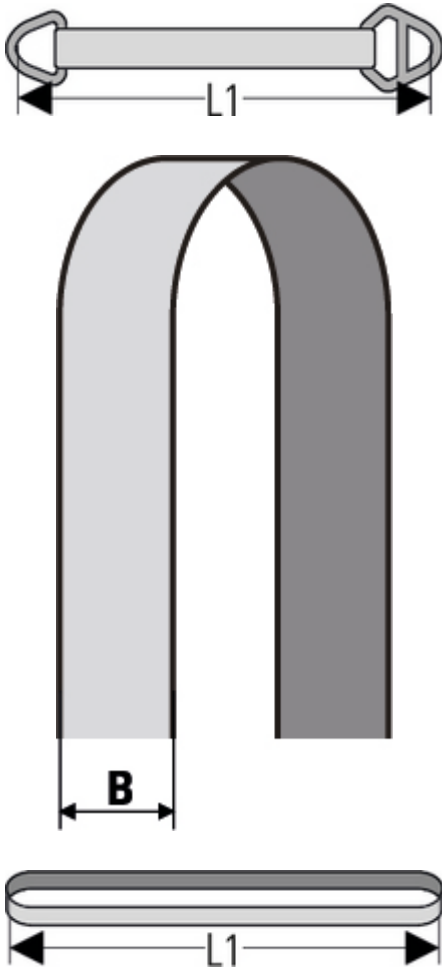

ORDER NUMBERS[Global Item Number/Local ERP Number SSDE]

Dimension L1	1000 kg	2000 kg	3000 kg
2 m	2002975 D077285	2002976 D077295	2002977 D077305
3 m	2003448 D077286	2003450 D077296	2003452 D077306
4 m	2003449 D077287	2003451 D077297	2003453 D077307
5 m	2003946 D077288	2003949 D077298	2003952 D077308
6 m	2003947 D077289	2003950 D077299	2003953 D077309
8 m	2003948 D077344	2003951 D077346	2003954

**SpanSet GmbH & Co.
KG**
Jülicher Straße 49-51
52531 Übach-
Palenberg
Deutschland
+49 (0) 2451 4831-0
info@spanset.de
www.spanset.com



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written authorisation of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. DB040719 © SpanSet GmbH & Co. KG - Germany

**SpanSet
Certified
Safety**

■ Main Material	High molecular weight polyethylene (HMPE)
■ Webbing Thickness	3 mm
■ Temperature Range	-40°C bis +60°C
■ Label Protection	Yes
■ Packaging Unit (PU) Content	1

