



PowerForce with D1 Links

Ideal for construction & mechanical engineering, they handle sharp edges ($\geq 2\text{mm}$) without extra protection, ensuring safety and longevity




Item Name short	WLL kg [kg]	WLL t [t]	L1 [m]	Webbing Width B [mm]	Weight for 1m [kg]	Weight Net [kg]	Weight per Meter [kg/m]
PowerForce 1ply D1D1 1000 2m	1000	1	2	40	0.57	1.14	0.08
PowerForce 1ply D1D1 1000 3m	1000	1	3	40	0.57	1.22	0.08
PowerForce 1ply D1D1 1000 4m	1000	1	4	40	0.57	1.3	0.08
PowerForce 1ply D1D1 1000 5m	1000	1	5	40	0.57	1.38	0.08
PowerForce 1ply D1D1 1000 6m	1000	1	6	40	0.57	1.46	0.08
PowerForce 1ply D1D1 1000 8m	1000	1	8	40	0.57	1.62	0.08
PowerForce 1ply D1D1 2000 2m	2000	2	2	80	0.93	1.86	0.16
PowerForce 1ply D1D1 2000 3m	2000	2	3	80	0.93	2.02	0.16
PowerForce 1ply D1D1 2000 4m	2000	2	4	80	0.93	2.18	0.16
PowerForce 1ply D1D1 2000 5m	2000	2	5	80	0.93	2.34	0.16
PowerForce 1ply D1D1 2000 6m	2000	2	6	80	0.93	2.5	0.16
PowerForce 1ply D1D1 2000 8m	2000	2	8	80	0.93	2.82	0.16
PowerForce 1ply D1D1 3000 2m	3000	3	2	120	1.58	3.16	0.24
PowerForce 1ply D1D1 3000 3m	3000	3	3	120	1.58	3.4	0.24
PowerForce 1ply D1D1 3000 4m	3000	3	4	120	1.58	3.64	0.24
PowerForce 1ply D1D1 3000 5m	3000	3	5	120	1.58	3.88	0.24
PowerForce 1ply D1D1 3000 6m	3000	3	6	120	1.58	4.12	0.24
PowerForce 1ply D1D1 3000 8m	3000	3	8	120	1.58	4.6	0.24

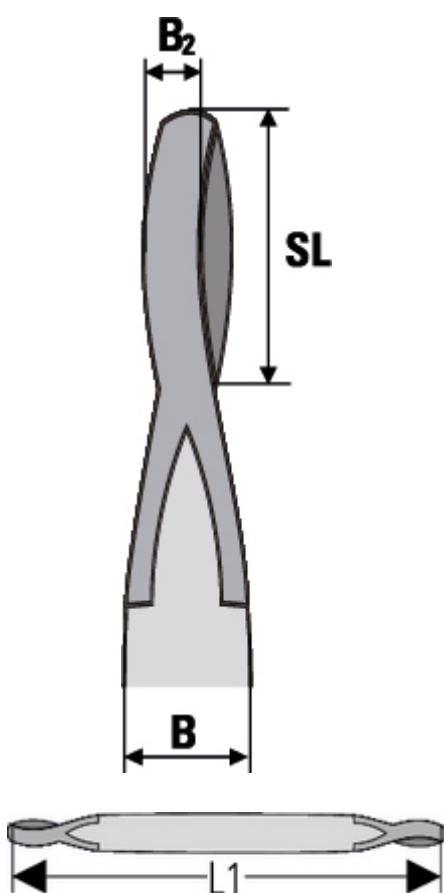

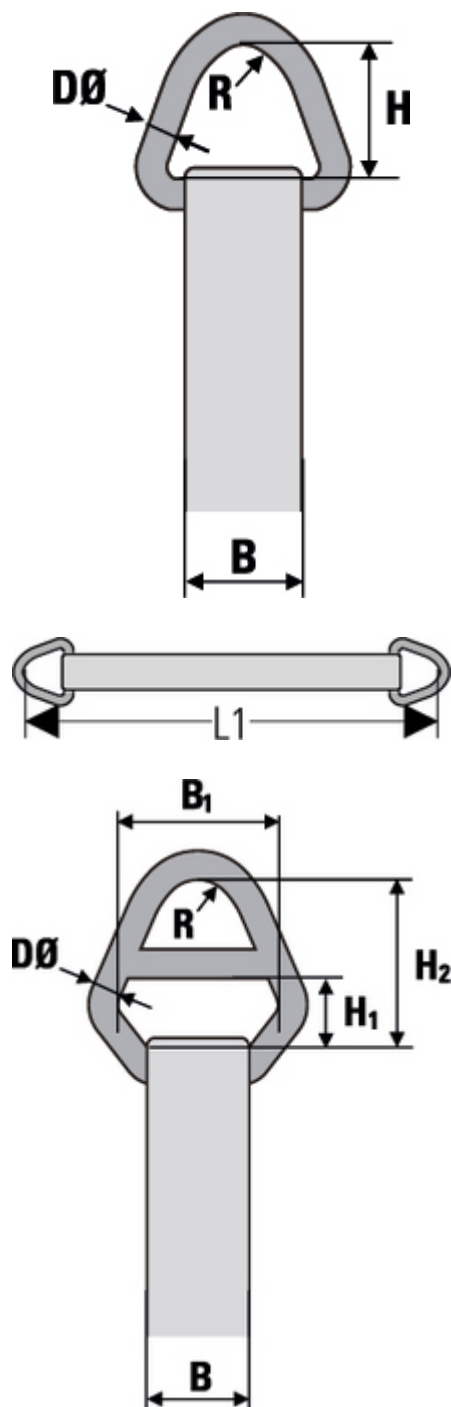

Item Name short	Colour
PowerForce 1ply D1D1 1000 2m	Purple
PowerForce 1ply D1D1 1000 3m	Purple
PowerForce 1ply D1D1 1000 4m	Purple
PowerForce 1ply D1D1 1000 5m	Purple
PowerForce 1ply D1D1 1000 6m	Purple
PowerForce 1ply D1D1 1000 8m	Purple
PowerForce 1ply D1D1 2000 2m	Green
PowerForce 1ply D1D1 2000 3m	Green
PowerForce 1ply D1D1 2000 4m	Green
PowerForce 1ply D1D1 2000 5m	Green
PowerForce 1ply D1D1 2000 6m	Green
PowerForce 1ply D1D1 2000 8m	Green
PowerForce 1ply D1D1 3000 2m	Yellow
PowerForce 1ply D1D1 3000 3m	Yellow
PowerForce 1ply D1D1 3000 4m	Yellow
PowerForce 1ply D1D1 3000 5m	Yellow
PowerForce 1ply D1D1 3000 6m	Yellow
PowerForce 1ply D1D1 3000 8m	Yellow



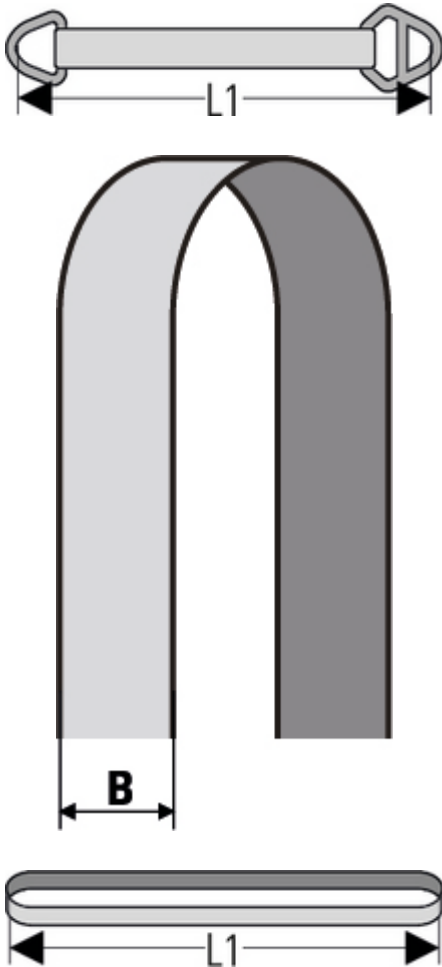

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

Dimension L1	1000 kg	2000 kg	3000 kg
2 m	2002975	2002976	2002977
3 m	2003448	2003450	2003452
4 m	2003449	2003451	2003453
5 m	2003946	2003949	2003952
6 m	2003947	2003950	2003953
8 m	2003948	2003951	2003954

- **Main Material** High molecular weight polyethylene (HMPE)
- **Webbing Thickness** 3 mm
- **Temperature Range** -40°C bis +60°C
- **Label Protection** Yes

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
 info@spanset.nl
 www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
 Certified
 Safety**

