


### Robusta 2500dan 50mm

Robust ratchet with fine toothing achieve higher pre-tensioning forces with less effort

| Item Name short                     | Lashing Type | Lashing Capacity [daN] | L1 [m] | Lashing End Fitting Component |
|-------------------------------------|--------------|------------------------|--------|-------------------------------|
| Robusta 2500/50/STF350 2pc 8m DJHS  | Two-piece    | 2500                   | 8      | DJHS-50                       |
| Robusta 2500/50/STF350 2pc 8m DJH   | Two-piece    | 2500                   | 8      | DJH-50                        |
| Robusta 2500/50/STF350 2pc 10m DJH  | Two-piece    | 2500                   | 10     | DJH-50                        |
| Robusta 2500/50/STF350 2pc 10m DJHS | Two-piece    | 2500                   | 10     | DJHS-50                       |
| Robusta 5000/50 1pc 8m              | One-piece    | 5000                   | -      | -                             |
| Robusta 5000/50 1pc 10m             | One-piece    | 5000                   | -      | -                             |

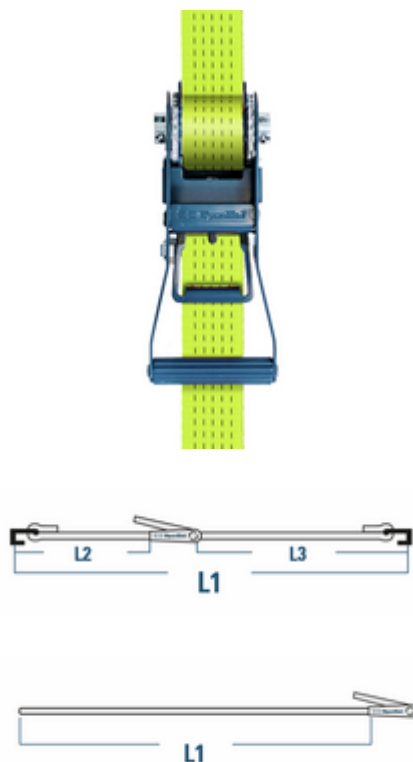

### ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

| Lashing End Fitting Component                                                              | One-piece | Two-piece       |
|--------------------------------------------------------------------------------------------|-----------|-----------------|
| -                                                                                          | 2024217   | -               |
| -                                                                                          | 2024222   | -               |
|  DJHS-50 | -         | 2024218         |
|  DJH-50  | -         | 2024220,2024221 |
|  DJHS-50 | -         | 2024219         |

|                          |                                            |
|--------------------------|--------------------------------------------|
| ■ Norms                  | EN 12195-2: 2001                           |
| ■ Surface Coating        | Epoxy                                      |
| ■ Webbing Material       | Polyester, thermofixed and low-stretch <4% |
| ■ Colour                 | Yellow                                     |
| ■ Webbing Width B        | 50 mm                                      |
| ■ Standard Tension Force | 350 daN                                    |

**SpanSet Nederland B.V.**  
Plaza 10A 4782 SK  
Moerdijk Nederland  
Tel.: +31 (0) 168 38 68 00  
info@spanset.nl  
www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet  
Certified  
Safety**

|                                     |          |
|-------------------------------------|----------|
| ■ Standard Tension Force (with TFI) | 500 daN  |
| ■ Anti Belt Slip (ABS)              | No       |
| ■ Label Protection                  | Yes      |
| ■ Handle Type                       | Standard |
| ■ Packaging Unit (PU) Content       | 1        |

