


Rotating Eyebolt with ring

Screwable Lifting Point 0,3t-40t, Steel Grade 100, Rotatable through 360°, foldable 180° eyebolt

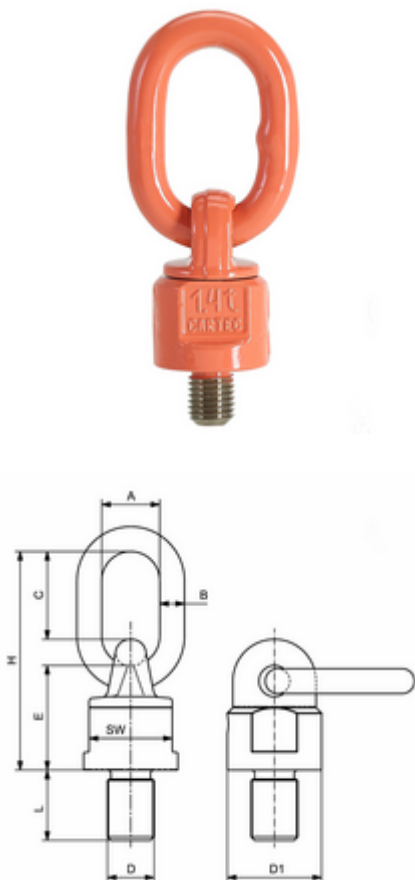

Item Name short	WLL kg [kg]	WLL t [t]	D1 [mm]	A [mm]	B [mm]	C [mm]	D [mm]
C800X-M8x16 0.3t	300	0.3	38	30	13	46	8
C800X-M8x18 0.3t	300	0.3	38	30	13	46	8
C800X-M10x18 0.5t	500	0.5	38	30	13	46	10
C800x-M12x18 0.7t	700	0.7	38	30	13	46	12
C800x-M14x20 1t	1000	1	38	30	13	46	14
C800x-M16x20 1.4t	1400	1.4	38	30	13	46	16
C800x-M20x30 1.7t	1700	1.7	38	30	13	46	20
C800x-M24x30 1.7	1700	1.7	38	30	13	46	24
C800x-M20x30 2.5t	2500	2.5	50	34	16	57	20
C800x-M24x30 4t	4000	4	58	40	18	70	24
C800x-M30x35 4t	4000	4	58	40	18	70	30
C800x-M30x35 6.7t	6700	6.7	80	45	22	65	30
C800x-M30x45 8t	8000	8	90	50	23	91	30
C800x-M36x54 10t	10000	10	90	50	23	91	36
C800x-M42x63 12.5t	12500	12.5	90	50	23	91	42
C800x-M45x60 12.5t	12500	12.5	90	50	23	91	45
C800x-M48x72 12.5t	12500	12.5	90	50	23	91	48
C800x-M45x60 16t	16000	16	120	70	32	120	45
C800x-M48x60 17t	17000	17	120	70	32	120	48
C800x-M56x78 18t	18000	18	120	70	32	120	56
C800x-M64x96 20t	20000	20	170	70	32	120	64
C800x-M64x96 28t	28000	28	170	90	45	124	64
C800x-M72x108 31.5t	31500	31.5	170	90	45	124	72
C800x-M80x120 35t	35000	35	170	90	45	124	80
C800x-M90x135 40t	40000	40	170	90	45	124	90

Item Name short	E [mm]	H [mm]	L [mm]	SW [mm]	Max tightening torque [Nm]	Weight Net [kg]
C800X-M8x16 0.3t	50	105	16	30	10	0.48
C800X-M8x18 0.3t	50	105	18	30	10	0.48
C800X-M10x18 0.5t	50	105	18	30	10	0.48



Item Name short	E [mm]	H [mm]	L [mm]	SW [mm]	Max tightening torque [Nm]	Weight Net [kg]
C800x-M12x18 0.7t	50	105	18	30	10	0.5
C800x-M14x20 1t	50	105	20	30	25	0.53
C800x-M16x20 1.4t	50	105	20	30	30	0.53
C800x-M20x30 1.7t	50	105	30	30	70	0.53
C800x-M24x30 1.7	50	105	30	30	70	0.53
C800x-M20x30 2.5t	61	131	30	40	70	1.05
C800x-M24x30 4t	68	153	30	48	150	1.63
C800x-M30x35 4t	68	153	35	48	150	1.63
C800x-M30x35 6.7t	71	156	35	70	225	2.85
C800x-M30x45 8t	86	200	45	80	225	4.4
C800x-M36x54 10t	86	200	54	80	410	4.62
C800x-M42x63 12.5t	86	200	63	80	550	5.2
C800x-M45x60 12.5t	86	200	60	80	550	5.2
C800x-M48x72 12.5t	86	200	72	80	550	5.2
C800x-M45x60 16t	112	262	60	100	550	10.9
C800x-M48x60 17t	112	262	60	100	550	10.9
C800x-M56x78 18t	112	262	78	100	800	10.9
C800x-M64x96 20t	112	262	96	100	800	10.9
C800x-M64x96 28t	165	333	96	140	800	29
C800x-M72x108 31.5t	165	333	108	140	800	29
C800x-M80x120 35t	165	333	120	140	1500	29
C800x-M90x135 40t	165	333	135	140	2000	29



ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Dimension L	WLL kg	8 mm	10 mm	12 mm	14 mm	16 mm	20 mm	24 mm	30 mm	36 mm	42 mm
16 mm	300 kg	2029805	-	-	-	-	-	-	-	-	-
18 mm	300 kg	2029806	-	-	-	-	-	-	-	-	-
18 mm	500 kg	-	2029807	-	-	-	-	-	-	-	-
18 mm	700 kg	-	-	2029809	-	-	-	-	-	-	-
20 mm	1000 kg	-	-	-	2029810	-	-	-	-	-	-
20 mm	1400 kg	-	-	-	-	2029811	-	-	-	-	-
30 mm	1700 kg	-	-	-	-	-	2029812	2029813	-	-	-
30 mm	2500 kg	-	-	-	-	-	2029814	-	-	-	-
30 mm	4000 kg	-	-	-	-	-	-	2029815	-	-	-
35 mm	4000 kg	-	-	-	-	-	-	-	2029816	-	-
35 mm	6700 kg	-	-	-	-	-	-	-	2029817	-	-
45 mm	8000 kg	-	-	-	-	-	-	-	2029818	-	-
54 mm	10000 kg	-	-	-	-	-	-	-	-	2029819	-
60 mm	12500 kg	-	-	-	-	-	-	-	-	-	-
60 mm	16000 kg	-	-	-	-	-	-	-	-	-	-
60 mm	17000 kg	-	-	-	-	-	-	-	-	-	-
63 mm	12500 kg	-	-	-	-	-	-	-	-	-	2029820
72 mm	12500 kg	-	-	-	-	-	-	-	-	-	-
78 mm	18000 kg	-	-	-	-	-	-	-	-	-	-
96 mm	20000 kg	-	-	-	-	-	-	-	-	-	-
96 mm	28000 kg	-	-	-	-	-	-	-	-	-	-
108 mm	31500 kg	-	-	-	-	-	-	-	-	-	-
120 mm	35000 kg	-	-	-	-	-	-	-	-	-	-
135 mm	40000 kg	-	-	-	-	-	-	-	-	-	-

Dimension L	45 mm	48 mm	56 mm	64 mm	72 mm	80 mm	90 mm
16 mm	-	-	-	-	-	-	-
18 mm	-	-	-	-	-	-	-
18 mm	-	-	-	-	-	-	-
18 mm	-	-	-	-	-	-	-
20 mm	-	-	-	-	-	-	-
20 mm	-	-	-	-	-	-	-
30 mm	-	-	-	-	-	-	-



Dimension L	45 mm	48 mm	56 mm	64 mm	72 mm	80 mm	90 mm
30 mm	-	-	-	-	-	-	-
30 mm	-	-	-	-	-	-	-
35 mm	-	-	-	-	-	-	-
35 mm	-	-	-	-	-	-	-
45 mm	-	-	-	-	-	-	-
54 mm	-	-	-	-	-	-	-
60 mm	2029821	-	-	-	-	-	-
60 mm	2029823	-	-	-	-	-	-
60 mm	-	2029824	-	-	-	-	-
63 mm	-	-	-	-	-	-	-
72 mm	-	2029822	-	-	-	-	-
78 mm	-	-	2029825	-	-	-	-
96 mm	-	-	-	2029826	-	-	-
96 mm	-	-	-	2029827	-	-	-
108 mm	-	-	-	-	2029828	-	-
120 mm	-	-	-	-	-	2029829	-
135 mm	-	-	-	-	-	-	2029830

■ Grade	100
■ Main Material	Steel
■ Colour	Orange
■ Packaging Unit (PU) Content	1

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United
Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

**SpanSet
Certified
Safety**