




## Rundschlingenkupplung EXOSET®

Zweiteilig mit Verbindungsbolzen

| Artikel Name kurz | WLL<br>[kg] | WLL<br>[t] | A<br>[mm] | B<br>[mm] | D<br>[mm] | F<br>[mm] | G<br>[mm] |
|-------------------|-------------|------------|-----------|-----------|-----------|-----------|-----------|
| RSCL-8-8          | 2000        | 2          | 63        | 40        | 22        | 9         | 26        |
| RSCL-10-8         | 3150        | 3.15       | 76        | 57        | 26        | 12        | 30        |
| RSCL-13-8         | 5300        | 5.3        | 94        | 53        | 33        | 15        | 37        |
| RSCL-16-8         | 8000        | 8          | 114       | 67        | 40        | 19        | 44        |

| Artikel Name kurz | K<br>[mm] | Nettogewicht kg<br>[kg] |
|-------------------|-----------|-------------------------|
| RSCL-8-8          | 18        | 0.30                    |
| RSCL-10-8         | 24        | 0.60                    |
| RSCL-13-8         | 29        | 1.10                    |
| RSCL-16-8         | 35        | 1.90                    |

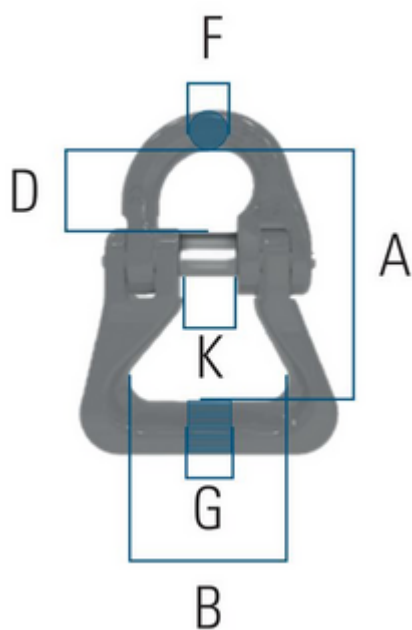

#### BESTELLNUMMERN[Global Item Number/Local ERP Number SSCH]

| WLL    | RSCL-8-8            | RSCL-10-8            | RSCL-13-8            | RSCL-16-8            |
|--------|---------------------|----------------------|----------------------|----------------------|
| 2 t    | 2002619<br>RSCL-8-8 | -                    | -                    | -                    |
| 3.15 t | -                   | 2002620<br>RSCL-10-8 | -                    | -                    |
| 5.3 t  | -                   | -                    | 2002621<br>RSCL-13-8 | -                    |
| 8 t    | -                   | -                    | -                    | 2002622<br>RSCL-16-8 |

|                                   |               |
|-----------------------------------|---------------|
| ■ Normen                          | EN 1677       |
| ■ Klasse                          | 80            |
| ■ Hauptmaterial                   | Stahl         |
| ■ Farbe                           | Blau          |
| ■ Temperaturbereich               | -40°C / 200°C |
| ■ Temperaturbereich               | -40°F / 120°F |
| ■ Verpackungseinheit (VPE) Inhalt | 1             |

