



Secutex SF2

Protection des deux côtés extrêmement résistante aux coupures et minimisant la formation de plis dans l'élingue.



Nom court de l'article	Largeur intérieure [mm]	Largeur extérieure [mm]	Hauteur extérieure [mm]	Height Inside [mm]	Poids net [kg]	Poids par mètre [kg/m]
SF2-30 1m	38	55	28	15	0.9	0.9
SF2-60 1m	60	80	25	10	1.7	1.4
SF2-65/3 1m	75	80	25	10	1.7	1.1
SF2-75/3 1m	80	95	25	10	1.85	1.3
SF2-90 1m	95	110	25	10	2.2	2.2
SF2-120 1m	120	140	25	10	2.9	2.9
SF2-125/3	120	145	25	10	2.9	1.9
SF2-200-20/3 1m	145	165	35	20	6.3	2.4
SF2-150 1m	150	175	25	10	3.4	3.4
SF2-180 1m	180	210	30	15	4.2	4.2
SF2-250-25/3	190	210	50	35	5.1	4.2
SF2-240 1m	240	270	35	20	5.5	5.5
SF2-300-30/3 1m	245	265	45	30	5.5	3.7
SF2-300 1m	310	335	35	20	6.8	6.8
SF2-300-40/3 1m	310	340	40	20	5.7	-

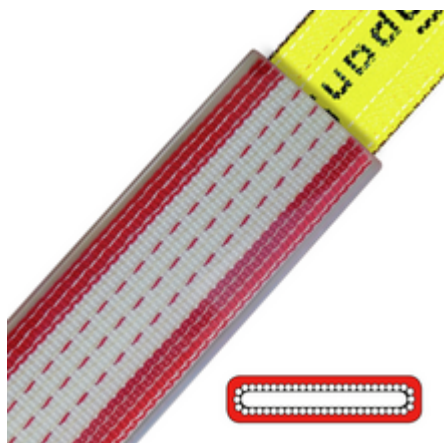

NUMÉROS DE COMMANDE[Global Item Number/Local ERP Number SSFR]

Height Inside	Longueur	38 mm	60 mm	75 mm	80 mm	95 mm	120 mm	145 mm	150 mm	180 mm	190 mm
10 mm	1 m	-	2015326	2015340	2015341	2015327	2015328,2015343	-	2015329	-	-
15 mm	1 m	2015325	-	-	-	-	-	-	-	2020666	-
20 mm	1 m	-	-	-	-	-	-	2020660	-	-	-
30 mm	1 m	-	-	-	-	-	-	-	-	-	-
35 mm	1 m	-	-	-	-	-	-	-	-	-	2020661

Height Inside	240 mm	245 mm	310 mm
10 mm	-	-	-
15 mm	-	-	-
20 mm	2015330	-	2015338,2020664
30 mm	-	2020662	-
35 mm	-	-	-

- Matériel principal Polyuréthane
- Contenu des unités d'emballage (UE) 1

