




### Self-Retracting Lifeline with Recovery Winch Function

Recovery device for work at height and confined space rescue applications

Item Name short	Lifeline Length [m]	B [mm]	D [mm]	L [mm]	T [mm]	W [mm]	Weight Net [kg]
SRLR S 12m	12	195	180	450	90	195	7
SRLR S 18m	18	240	200	570	210	240	11.5
SRLR S 24m	24	275	220	630	110	275	16
SRLR S 30m	30	315	230	640	112	315	21
SRLR S 40m	40	370	235	740	260	170	40
SRLR S 65m	65	390	240	780	240	390	43

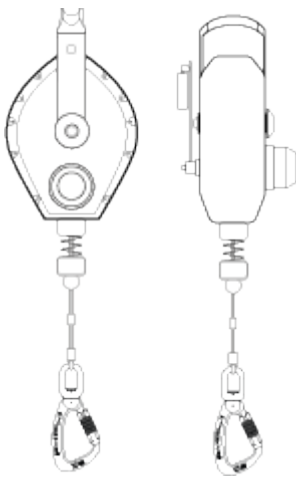

#### ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Lifeline Length	SRLR S 12m	SRLR S 18m	SRLR S 24m	SRLR S 30m	SRLR S 40m	SRLR S 65m
12 m	2002363 2002363	-	-	-	-	-
18 m	-	2002380 2002380	-	-	-	-
24 m	-	-	2002381 2002381	-	-	-
30 m	-	-	-	2002382 2002382	-	-
40 m	-	-	-	-	2002383 2002383	-
65 m	-	-	-	-	-	2002384 2002384

#### Norms

EN 1496: 2006 EN 360: 2002

**SpanSet (UK) Limited**  
Telford Way  
Middlewich Cheshire  
CW10 0HX United Kingdom  
+44 (0) 1606 737494  
info@spanset.co.uk  
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

**SpanSet  
Certified  
Safety**

■ <b>Harness Connector</b>	IKV52
■ <b>Main Material</b>	Steel
■ <b>Colour</b>	Blue
■ <b>Temperature Range</b>	-40°C / +50° C
■ <b>Temperature Range</b>	-40°F / +120° F
■ <b>Packaging Unit (PU) Content</b>	1

