


SP140 Twin Elasticated Energy Absorbing Lanyard

High Performance Energy Absorbing Lanyard for workers up to 140kg

Item Name short	Lanyard Leg Type	Energy Absorbing	Maximum User Weight [kg]	Quality	Anchor Connector	Harness Connector	L [m]
SP140 TW EL 2m 1RH2	Twin Leg Elasticated	Yes	140	Professional	1RH2-Lite	1DK2	2

Item Name short	Relieved Length [m]	Stretched Length [m]	Weight Net [kg]	Main Material	Inspection Guide	Multilingual User Instruction Manual	Packaging Unit (PU) Content
SP140 TW EL 2m 1RH2	1.1	2	2.11	Polyester	Yes	Yes	1

Item Name short	Individually Serial Numbered	Individual Certificate	Lifespan [yr.]	Colour
SP140 TW EL 2m 1RH2	Yes	Yes	10	Black

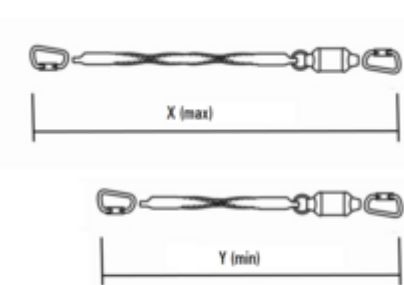

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

Dimension L	Anchor Connector	Twin Leg Elasticated
2 m	1RH2-Lite	2002247



■ Norms	EN 355: 2002
■ Anchor Connector	1RH2 Lite
■ Harness Connector	1DK2
■ Main Material	Polyester
■ Colour	Black
■ Stretched Length	2 m
■ Relieved Length	1.1 m
■ Weight Net	2.11 kg
■ Energy Absorbing	Yes
■ Label Protection	Yes
■ Packaging Unit (PU) Content	1

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
 info@spanset.nl
 www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
 Certified
 Safety**