


SP150 Twin Elastic

Reduces risk of entanglement in traversing and climbing applications, with elasticated webbing and a compact energy absorber.

Item Name short	Anchor Connector
SP150 TW EL 2m 1RH2	1RH2
SP150 TW EL 2m 1RH2	1RH2
SP150 TW EL 2m 3RH2A	3RH2A

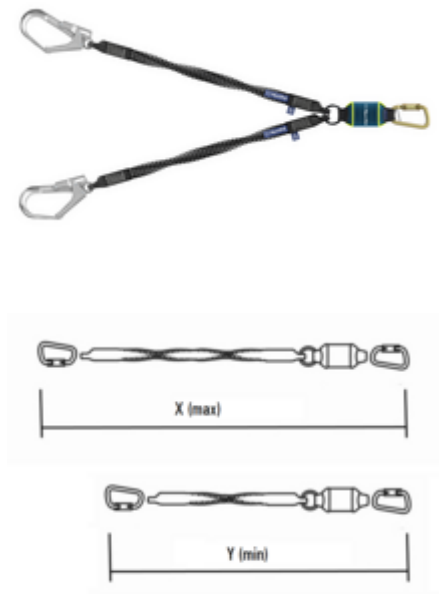

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

Length



1RH2



3RH2A

2 m	2031312,2031313	2031314
-----	-----------------	---------

■ Norms	EN 355: 2002
■ Harness Connector	1DK2
■ Main Material	High-performance polyester
■ Colour	Blue
■ Energy Absorbing	Yes
■ Packaging Unit (PU) Content	1

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
 info@spanset.nl
 www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
 Certified
 Safety**