


SP150 Twin Elastic

Reduces risk of entanglement in traversing and climbing applications, with elasticated webbing and a compact energy absorber.

Item Name short	Lanyard Leg Type	Energy Absorbing	Maximum User Weight [kg]	Length [m]	Anchor Connector	Harness Connector	Main Material
SP150 TW EL 2m 1RH2	Twin Leg Elasticated	Yes	150	2	1RH2	1DK2	High-performance polyester

Item Name short	Inspection Guide	Multilingual User Instruction Manual	Packaging Unit (PU) Content	Individually Serial Numbered	Individual Certificate	Lifespan [yr.]	Colour
SP150 TW EL 2m 1RH2	Yes	Yes	1	Yes	Yes	10	Blue

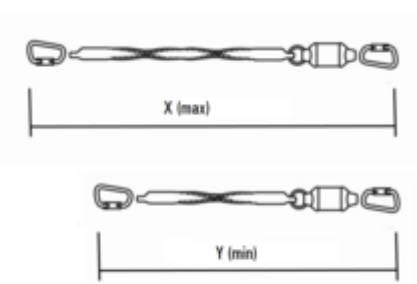

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Length



1RH2

2 m

2031313

■ Norms	EN 355: 2002
■ Anchor Connector	1RH2
■ Harness Connector	1DK2
■ Main Material	High-performance polyester
■ Colour	Blue
■ Fall Equipment Type	Fall Arrest
■ Energy Absorbing	Yes
■ Packaging Unit (PU) Content	1

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

**SpanSet
Certified
Safety**