


SP150 Twin Fixed Length

Lanyard for climbing and traversing with duplex webbing construction for edge resistance in aggressive environments.

Item Name short	Length [m]	Anchor Connector
SP150 TW FW 1m 1RH2	1	1RH2
SP150 TW FW 1m 3RH2	1	3RH2
SP150 TW FW 1.5m 1DK2	1.5	1DK2
SP150 TW FW 1.5m 1RH2	1.5	1RH2
SP150 TW FW 2m 1RH2	2	1RH2

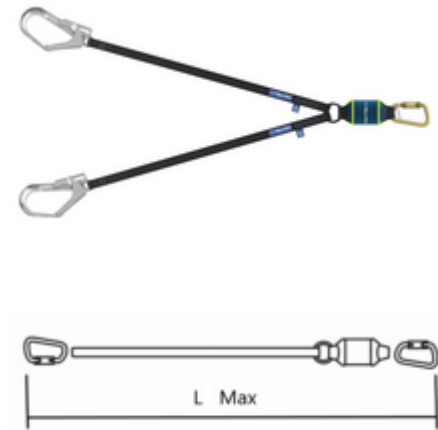

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Length	1DK2	1RH2	3RH2
1 m	-	2031303	2031304
1.5 m	2031300	2031301	-
2 m	-	2031305	-

■ Norms	EN 355: 2002
■ Harness Connector	1DK2
■ Main Material	High-performance polyester
■ Colour	Blue
■ Fall Equipment Type	Fall Arrest
■ Energy Absorbing	Yes
■ Packaging Unit (PU) Content	1

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United
Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

SpanSet
Certified
Safety