


### Starpoint-oogmoer

360° draaibare en belastbare ringoogmoer

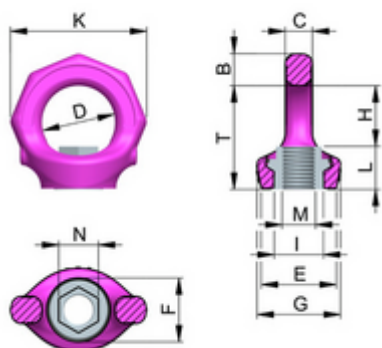

| Item Naam kort | WLL kg Hoek 0 [kg] | WLL t Hoek 0 [t] | WLL kg Hoek 90° [kg] | WLL t Hoek 90° [t] | B [mm] | C [mm] | D [mm] |
|----------------|--------------------|------------------|----------------------|--------------------|--------|--------|--------|
| VRM-M6         | 500                | 0.5              | 100                  | 0.1                | 9      | 7      | 20     |
| VRM-M8         | 1000               | 1                | 300                  | 0.3                | 11     | 9      | 25     |
| VRM-M10        | 1000               | 1                | 400                  | 0.4                | 11     | 9      | 25     |
| VRM-M12        | 2000               | 2                | 700                  | 0.7                | 13     | 10     | 30     |
| VRM-M16        | 4000               | 4                | 1500                 | 1.5                | 15     | 13     | 35     |
| VRM-M20        | 6000               | 6                | 2300                 | 2.3                | 17     | 16     | 40     |
| VRM-M24        | 8000               | 8                | 3200                 | 3.2                | 20     | 19     | 49     |
| VRM-M30        | 12000              | 12               | 4500                 | 4.5                | 26     | 24     | 60     |

| Item Naam kort | E [mm] | G [mm] | I [mm] | K [mm] | L [mm] | M [mm] | N [mm] |
|----------------|--------|--------|--------|--------|--------|--------|--------|
| VRM-M6         | 23     | 28     | 13     | 37     | 9      | 6      | 6      |
| VRM-M8         | 25     | 30     | 16.3   | 47     | 12     | 8      | 6      |
| VRM-M10        | 25     | 30     | 16.3   | 47     | 15     | 10     | 6      |
| VRM-M12        | 30     | 34     | 19.8   | 56     | 18     | 12     | 8      |
| VRM-M16        | 36     | 40     | 23.5   | 65     | 24     | 16     | 10     |
| VRM-M20        | 41     | 50     | 29.3   | 76     | 30     | 20     | 12     |
| VRM-M24        | 51     | 60     | 35     | 92     | 36     | 24     | 14     |
| VRM-M30        | 66     | 75     | 44     | 114    | 45     | 30     | 17     |

| Item Naam kort | T [mm] | Lopende meter [kg] |
|----------------|--------|--------------------|
| VRM-M6         | 28     | 0.07               |
| VRM-M8         | 35     | 0.1                |
| VRM-M10        | 34     | 0.1                |
| VRM-M12        | 42     | 0.2                |
| VRM-M16        | 49     | 0.3                |
| VRM-M20        | 58     | 0.5                |
| VRM-M24        | 70     | 0.9                |
| VRM-M30        | 87     | 1.5                |



## BESTELNUMMERS[Global Item Number/Local ERP Number SSNL]

| WLL t Hoek 0 | VRM-M6  | VRM-M8  | VRM-M10 | VRM-M12 | VRM-M16 | VRM-M20 | VRM-M24 | VRM-M30 |
|--------------|---------|---------|---------|---------|---------|---------|---------|---------|
| 0.5 t        | 2009203 | -       | -       | -       | -       | -       | -       | -       |
| 1 t          | -       | 2009204 | 2009205 | -       | -       | -       | -       | -       |
| 2 t          | -       | -       | -       | 2009206 | -       | -       | -       | -       |
| 4 t          | -       | -       | -       | -       | 2009207 | -       | -       | -       |
| 6 t          | -       | -       | -       | -       | -       | 2009208 | -       | -       |
| 8 t          | -       | -       | -       | -       | -       | -       | 2009209 | -       |
| 12 t         | -       | -       | -       | -       | -       | -       | -       | 2009210 |

|                                  |                     |
|----------------------------------|---------------------|
| ■ Normen                         | EN 1677-1 ISO 12100 |
| ■ Hoofdmateriaal                 | Staal               |
| ■ Kleur                          | Roze                |
| ■ Temperatuurbereik              | -40°C bis +100°C    |
| ■ Verpakkingseenheid (PU) Inhoud | 1                   |

